



The Model 9112i is a value priced, basic single line IP Telephone with speakerphone offering a flexible, interoperable IP solution that meets VoIP budgets for most applications.




9112i

Model 9112i IP Telephone

Key Features:

- **Enhanced Call Management** — Large storage for personal directory, callers log, and redial list
- **Tight Integration** — Support for multiple IP telephony systems including BroadWorks®, Nortel, Sylanro, and Asterisk SIP
- **Remarkable Audio** — Quality speakerphone with excellent voice delivery
- **Protect Your Investments** — Firmware upgrades can be downloaded and installed in the field as standards develop and protocols evolve

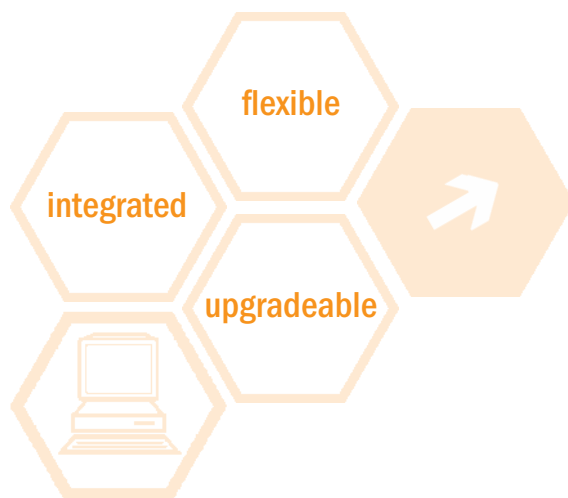

AASTRA

Driving the Future of IP Communications

Building success with the business telephone leader

VIEW AASTRA TELECOM'S PHONES ON THE INTERNET AT WWW.AASTRA.COM

Technical specifications

Physical

- » 20.2 cm W x 19.2 cm D x 8.9 cm H (8.0"W x 7.6"D x 3.5"H)
- » 812 g (28.6 oz)

Power

- » AC wall adapter included

Handset / Headset

- » Modular headset connector, compatible with amplified business headsets
- » Hearing aid compatible handset
- » Quality speakerphone

Display

- » 3 line backlit display

Feature Keys

- » 4 navigational keys
- » 2 programmable keys
- » 11 predefined hard keys including Callers log, Conference, Call Transfer, Redial, Options, Directory, Save, Delete, Speaker/Headset, Mute

Networking

- » 10/100 Mbps Ethernet port
- » Manual or Dynamic Host Configuration Protocol (DHCP) IP address setup
- » Time and date synchronization using SNTP
- » Built-in HTTP server for web administration and maintenance
- » Server provisioned user configuration files

Protocols / Codecs

- » IETF SIP (RFC3261)
- » G.711 μ -law / A-law
- » G.729

Feature Highlights*

- » Personal directory
- » Call forward
- » Call transfer
- » Call waiting
- » Caller and calling line information
- » Callers log
- » Conference
- » Redial list
- » Live dial pad or pre-dial support
- » Broadsoft's BroadWorks enhanced SIP – supports Shared Call Appearances, CommPilot Call Manager
- » Nortel's MCS 5100/5200 SIP support – Conferencing, Voicemail, and NAT Traversal support
- » Sylantro SIP – Supports Comcierge, Call Park/Pickup, Conference

Package Contents

- » 9112i IP Telephone
- » Desk Stand
- » AC wall adapter
- » Quick Installation Guide
- » Network Cable

* Feature availability dependent on IP telephony system

THIRD-PARTY INTEROPERABILITY	480i CT	480i	9133i	9112i
BROADSOFT® - BROADWORKS® SIP (RELEASE 11.1)	⊕	⊕	⊕	⊕
NORTEL NETWORKS - MCS 5100 & 5200* (RELEASE 3.0)	⊕ ¹	⊕	⊕	⊕
SYLANTRO® - SIP (VERSION 3.1)	⊕ ¹	⊕	⊕ ¹	⊕ ¹
ASTERISK™	⊕ ²	⊕ ²	⊕ ²	⊕ ²
SPHERE COMMUNICATIONS - SPHERICALL™ MGCP		⊕		

¹ Currently undergoing certification – Q3 2005

² Field tested and deployed

* The Aastra 480i, 9133i and 9112i IP Phones were verified as compatible with Nortel Networks Multimedia Communications Server 5100 and 5200 in a controlled laboratory environment.



Driving the Future of IP Communications

09/05

For more information, contact your Aastra Telecom representative, or call +1 905 760-4200.

COPYRIGHT (C) 2005 AASTRA TELECOM. ALL RIGHTS RESERVED. INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. AASTRA TELECOM ASSUMES NO RESPONSIBILITY FOR ANY ERRORS THAT MAY APPEAR IN THIS DOCUMENT. PRODUCT CAPABILITIES DESCRIBED IN THIS DOCUMENT PERTAIN SOLELY TO AASTRA TELECOM'S MARKETING ACTIVITIES IN THE U.S AND CANADA. AVAILABILITY IN OTHER MARKETS MAY VARY.