

# C400/C600

WWW.FANVIL.COM

## Smart IP Phone C400/C600 Quick Installation Guide



VoIPon [www.voipon.co.uk](http://www.voipon.co.uk) [sales@voipon.co.uk](mailto:sales@voipon.co.uk) Tel: +44 (0)1245 808195 Fax: +44 (0)1245 808299

# Fanvil

Smart VoIP

1

Fanvil

Instruction



**C400/C600**

Overview

## Included Accessories



Smart IP Phone  
C400/C600



Handset



Power adaptor




Handset cord



Quick Installation Guide



Ethernet Cable



Base bracket

1

Fanvil

Instruction



C400/C600

Overview

## Included Accessories



Smart IP Phone  
C400/C600



Handset



Power adaptor



Handset cord



Quick Installation Guide




Ethernet Cable



Base bracket


## 2 The Appearance of Product

Front view and keypad instruction:

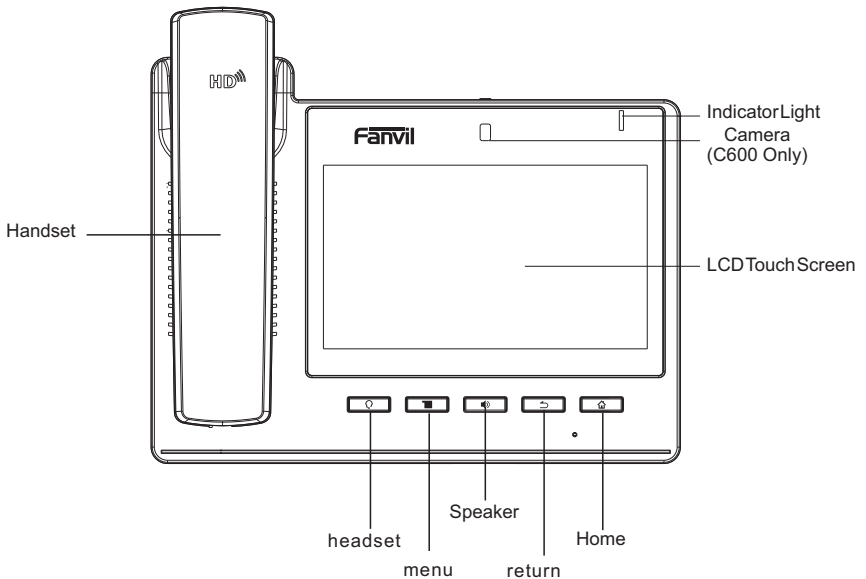

# 3 Connecting IP Phone

Connect the IP Phone as shown by the following diagram:

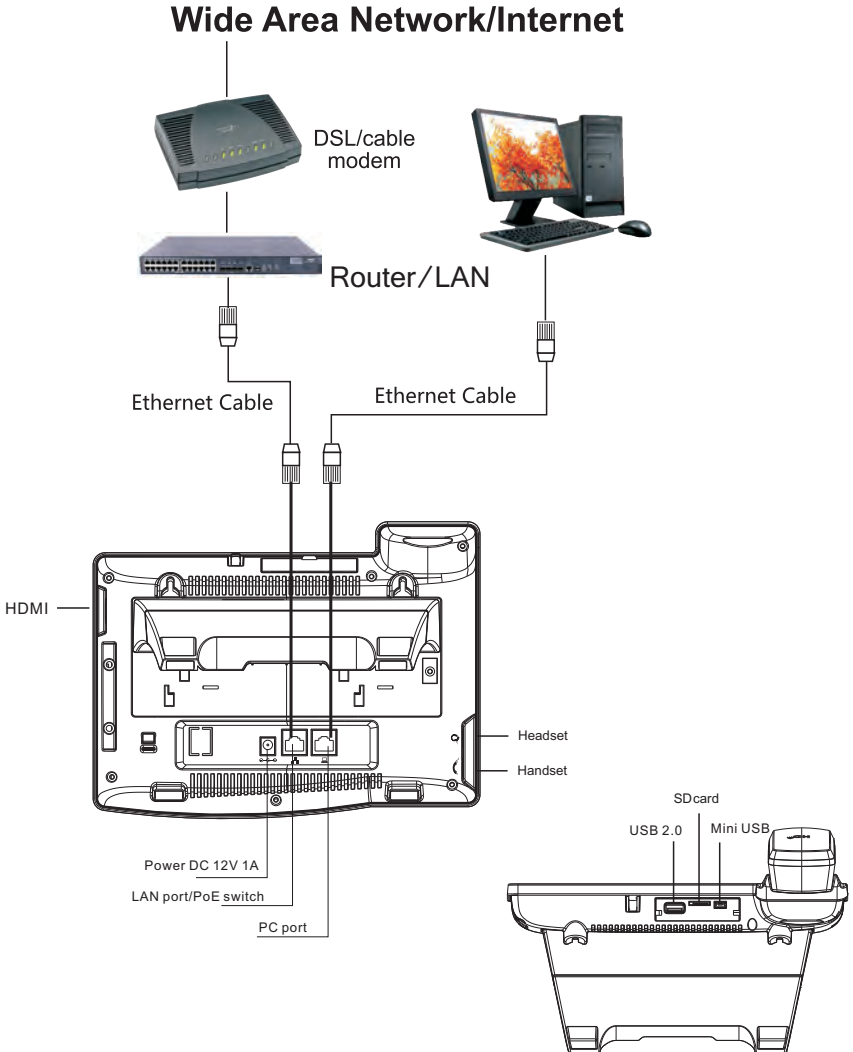


## 4 Configuration

### Configuring via Web

1. Drag Status Bar on the top of Phone, and you would get the phone's network IP address.
2. Open web browser and input the IP with, such as `http://192.168.1.1/` in the address bar. You would get ready to enter web interface and set up.

\* The default Username / Password is “admin” / “admin”.

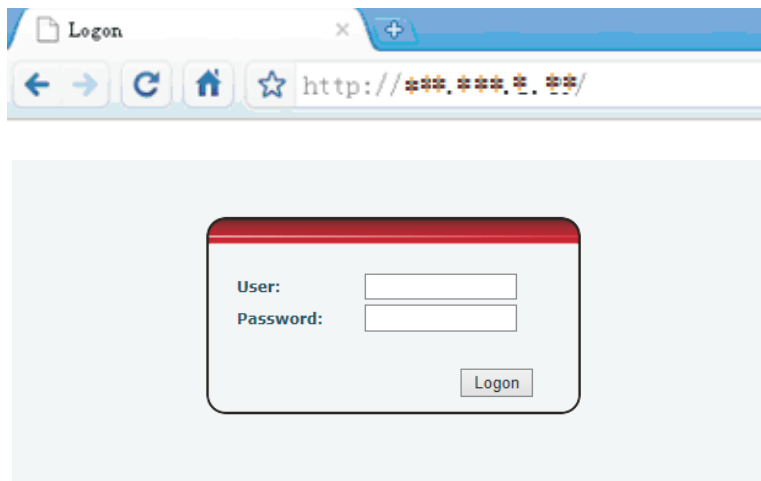

# 5 Configuration

## VoIP Settings

1. Selects SIP Line for registration
2. Input IP address, Server Port, Authentication User, Password, SIP User, and Display name... Enable “Mark”, and Click “APPLY”

The screenshot shows the Fanvil C600 web interface. The left sidebar contains a navigation menu with options: BASIC, NETWORK, VOIP (selected), PHONE, FUNCTION KEY, MAINTENANCE, SECURITY, and LOGOUT. The main content area is titled 'SIP' and 'STUN'. Under 'SIP Line', a dropdown menu shows 'SIP 1'. Below this, there are sections for 'Basic Settings >>', 'Audio Codecs >>', and 'Advanced SIP Settings >>'. The 'Basic Settings' section contains the following fields:

Status	Registered	Domain Realm	
Server Address	172.16.1.2	Proxy Server Address	
Server Port	5060	Proxy Server Port	
Authentication User	8810	Proxy User	
Authentication Password	*****	Proxy Password	
SIP User	8810	Backup Proxy Server Address	
Display Name	Admin	Backup Proxy Server Port	5060
Enable Registration	<input checked="" type="checkbox"/>	Server Name	

At the bottom right of the 'Basic Settings' section, there is an 'Apply' button.

## Configuring via LCD menu

### Network Settings

1. Press “Phone Menu ICON” on the screen.
2. Select and Press “Network”.
3. Select DHCP, Static IP, or PPPoE – and “SAVE”

\* The default value is DHCP. If you select Static IP or PPPoE, please input the necessary information follow by the screen.


### VoIP Settings

1. Press “Phone Menu ICON” on the screen.
2. Select and Press “Accounts”
3. Please input MENU Password “123456” and Enter
4. Input Server address, Server port, Authentication User, Password and SIP User... Enable Registration “Mark”, and Click “SAVE”

# 6 Make a Phone Call

## Make a call

1. Lift Handset, Dialing ICON, or SPEAKER Key
2. Select the SIP line you would like to use it
3. Dial the number – Press “#” sign or Video ICON key(C600 Only) to make a Audio or Video Call

\* If you have the wrong number need to delete it, please press  to process it. Also, you can erase all of them by long pressing the delete ICON.

## Answer a call

1. Audio Call (Default Configuration) -- Lift Handset or Press the SPEAKER key
2. Video Call (C600 Only)– Pressing the Video ICON to answer it. Or you can Lift Handset or Press the SPEAKER key if the phone had pre-programmed Video as Default.

\* You could see the contact’s picture (pre-installed), name, and phone number when you receive a call which is in your contact list.

\* You can switch the Audio to Video conversation if the other party accept your request by pressing the Video Request ICON.

## Call Transfer

1. During the conversation with Party A, press the “Transfer” key, make another call conversation with Party B and Pressing the “Transfer” Key again.
2. During the conversation with Party A, press the “Transfer” key, dial party B number than pressing the “Transfer” key again.

## Call Conference

During the conversation with Party A, press the “Conference” key, make another call conversation with Party B and pressing the “Conference” key again.

\* During the three parties’ conversation status, you can press either the picture of Party A or Party B to switch the individual conversation of each party.


\* During the three parties’ conversation status, you can skip the current conversation by pressing the “Exit”. The other two parties can continue conversation without interrupting.





# 3 Connecting IP Phone

Connect the IP Phone as shown by the following diagram:

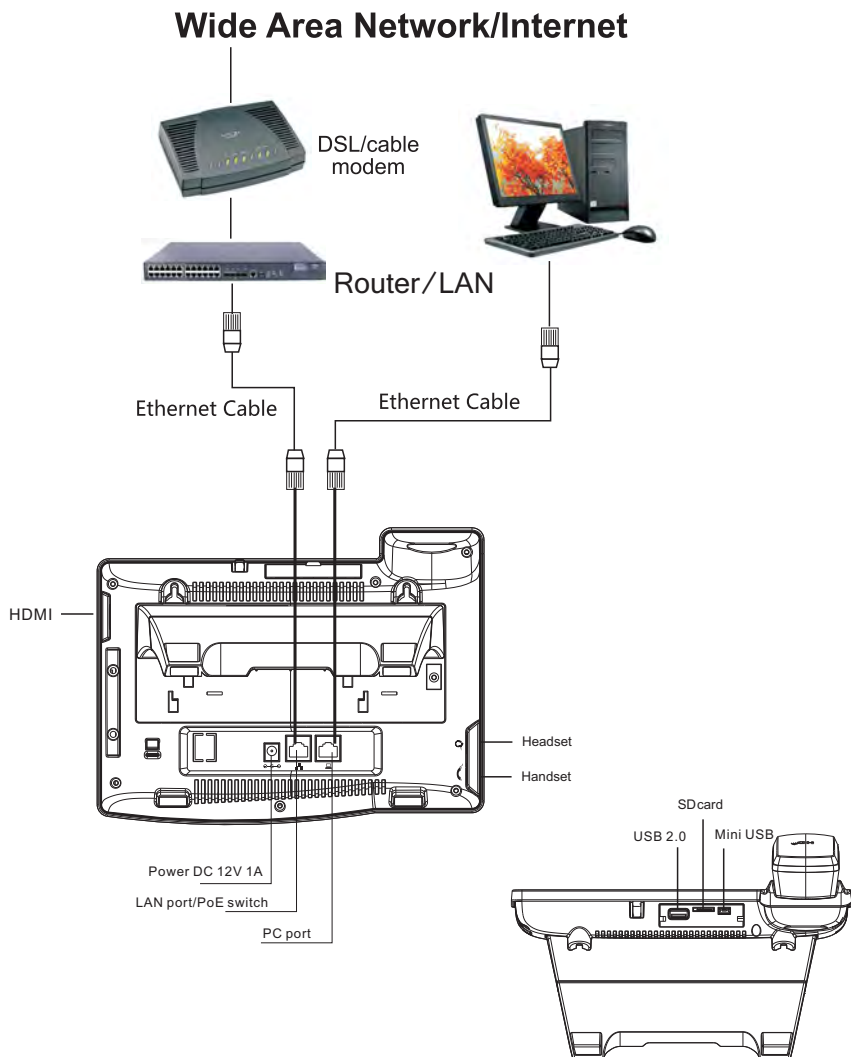

## 4 Configuration

### Configuring via Web

1. Drag Status Bar on the top of Phone, and you would get the phone's network IP address.
2. Open web browser and input the IP with, such as `http://192.168.1.1/` in the address bar. You would get ready to enter web interface and set up.

\* The default Username / Password is “admin” / “admin”.

