

VIP-130L IP Paging Horn

INTRODUCTION

The VIP-130L IP Paging Horn is a self contained paging system which enables voice paging up to 1200 feet from an Ethernet connection. The VIP-130L consist of a high efficiency 5 Watt Class-D Horn and a VIP-LLE Network Extender allowing stand alone capability when used with a SIP enabled telephone System or can be accessed from a variety of Valcom managed VoIP products.



SPECIFICATIONS

Access Methods

- PBX, FXO Port w/VIP-811
- POTS telephone set w/VIP-811
- PBX, FXS Port w/VIP-821
- Valcom M Cast Page Group
- SIP – enable telephone system

Features

- RJ-45 network connection
- LED Status Indicator
- Network activity LEDs
- 802.3af compliant
- High Efficiency Class-D 5 Watt Amplifier

Dimensions/Weight (Horn)

- 7.00" H x 10.00" W x 10.00" D (18.75 cm H x 25.4 cm W x 26.4 cm D)
- Weight: 5.8 lbs. (2.63 kg)

Network Extender (VIP-LLE)

- 1.30" H x 6.10" W x 6.00" D (3.51 cm H x 15.72 cm W x 13.51 cm D)
- Weight: 0.85 lbs. (0.39 kg)

Nominal Specifications – HORN

Input Impedance:	600 Ohms
Input Level:	-10dBm
Output Impedance:	600 Ohms
Output Level:	-10dBm nominal

Nominal Specifications – VIP-LLE

Via 802.3af PoE Ethernet Switch:
Class 3 (12.95W)

Environment

Temperature:	0 to +40° C
Humidity:	0 to 85% non-precipitating

Packing List


Qty	Item
1	VIP-LLE Network Extender
1	5 Watt High Efficiency Horn
1	VSP Document
2	Mounting Brackets
4	Rubber Pads
4	Wood Screws
1	RJ-45 Termination Block
1	RJ-45 Patch Cable

INSTALLATION

FCC Information

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area may cause harmful interference in which case the user will be required to correct the interference at his own expense.

Precautionary Designations

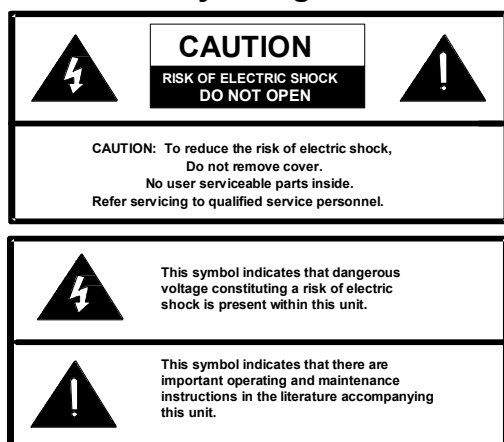

Mounting (VIP-LLE)

The VIP-LLE Network Extender is designed for wall or shelf mounting and must be within 300 feet of the network switch.

Shelf: Provided with the VIP-LLE Network Extender are four rubber pads. Peel the pads from the carrier backing and place at the four corners of the bottom of the unit.

Wall: Using the brackets and wood screws provided, secure the VIP-LLE Network Extender to the wall.

Mounting (HORN)

The horn should be mounted 15 to 20 feet above the floor to allow for best sound distribution. The unit can be mounted to a wall, a beam or an electrical box.

NOTE: For ease of installation, the base can be attached to the speaker before or after the base is mounted.

- Loosen position adjustment knob
- Insert the ball of the base into the socket of the speaker
- Tighten the position adjustment knob
- Mount the base to a wall using the two holes provided. Knockout holes are provided for punch out should additional holes be desired.
- A “C” clamp is provided with the horn to allow mounting to a beam. Place the bolt through the hole in the bottom of the base to secure the “C” clamp to the beam. It is suggested that the horn be mounted to the underside of the “I” beam to provide maximum positioning adjustments.
- Connection to an electrical backbox is accomplished by channeling wire through the ball of the base and making appropriate connections. The base has holes punched for a double-gang square box, but by punching out additional knockout holes, the base can be mounted to a single-gang or octagon box

The horn may be rotated or moved up and down to obtain the desired position by loosening the position adjustment knob at the bottom of the unit approximately one turn. Make required adjustments and re-tighten knob.

Interconnections

The only method of powering the VIP-130L IP Paging Horn is via a power over Ethernet switch or power injector meeting the 802.3af specification.

Make all required signal connections before connecting to Ethernet switch or power injector meeting the 802.3af specification. Power is supplied to the horn assembly via the VIP-LLE Network Extender.

Signal Connections (Fig. 1)

Connect CAT-5 cable from the rear panel color coded connector of the VIP-LLE Network Extender to the supplied RJ-45 termination block (900 feet maximum distance). Use the supplied CAT-5 patch cable to connect the RJ-45 connector of horn to RJ-45 termination block.

Network Connection (Fig. 1)

The VIP-LLE Network Extender has one CAT-5 RJ-45 "NETWORK" connector on the front panel and one CAT-5 color-coded connector on the rear panel.

Use the supplied CAT-5 patch cable to connect the NETWORK connector of the VIP-LLE Network Extender to a 802.3af compliant PoE port (300feet maximum distance).

Status Indicator Lights

The VIP-LLE Network Extender has 3 status indication lights:

STATUS: Flashes during normal operation, and solid when unit in reset.

LINK: Indicates 100 Mbit Ethernet connection when illuminated. No activity indicates 10 Mbit connection.

Act: Indicator flashes to indicate network activity

Operation

Provide paging from SIP connection or via a variety of Valcom managed VoIP products. Integration to customer telephone system can be via SIP registration, FXO port (with VIP-811), or FXS port (with VIP-821).

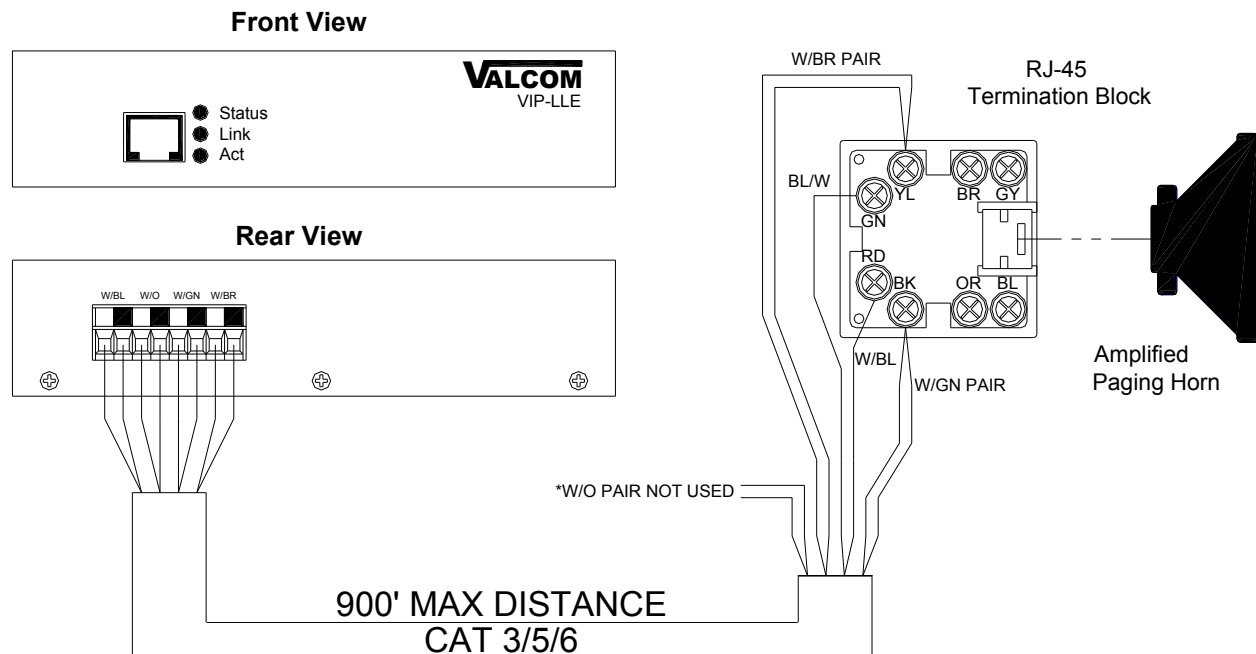


Figure 1

TECHNICAL ASSISTANCE

Valcom equipment is not field repairable. Valcom, Inc. maintains service facilities in Roanoke, VA. Should repairs be necessary, attach a tag to the unit clearly stating your company name, address, phone number, contact person and the nature of the problem. Send the unit to:

VALCOM LIMITED WARRANTY

Valcom, Inc. warrants its products only to the original purchaser, for its own use, to be free from defects in materials and workmanship under conditions of normal use and service for a period of one year from the date of shipment. This Limited Warranty obligation shall be limited to the replacement, repair or refund of any such defective device within the warranty period, provided that:

1. inspection by Valcom, Inc. indicates the validity of the claim;
2. the defect is not the result of damage, misuse or negligence after the original shipment;
3. the product has not been altered in any way or repaired by others and that factory sealed units are unopened (a service charge plus parts and labor will be applied to units defaced or physically damaged);
4. freight charges for the return of products to Valcom are prepaid;
5. all units 'out of warranty' are subject to a service charge. The service charge will cover minor repairs (major repairs will be subject to additional charges for parts and labor).

This Limited Warranty is in lieu of and excludes all other warranties, expressed or implied and in no event shall Valcom, Inc. be liable for any anticipated profits, consequential damages, loss of time or other losses incurred by the buyer in connection with the purchase, operation, maintenance, installation, removal or use of the product. The maximum liability of Valcom under this warranty is limited to the purchase price of the specific Product covered by the warranty.

Disclaimer. Except for the Limited Warranty provided herein, the product is provided "as-is" without any warranty of any kind whatsoever including, without limitation, any **WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT.**

This warranty specifically excludes damage incurred in shipment. In the event a product is received in damaged condition, the carrier should be notified immediately. Claims for such damage should be filed with the carrier involved in accordance with the F.O.B. point.