

SmartNode VoIP Gateways & Routers

The SmartNode 4650, with up to 5 BRI ports and 8 simultaneous voice channels, is the best way to connect ISDN networks to the world of voice over IP. Using integrated G.SHDSL.bis broadband access, it delivers converged voice and data services that exceed ISDN standards.

Multiport ISDN VoIP IAD

SmartNode 4650 with G.SHDSL.bis Interface

The SmartNode 4650 series is the CPE of choice for business broadband access providers that want to generate new revenue and acquire new customers through voice-over-IP. Part of the proven market-leading SmartNode VoIP product family, the SmartNode 4650 Series features a 3 or 5 BRI/So port configuration to fit the requirements of small and medium enterprises.

In one single box, it combines broadband access and voice-over-IP, and thanks to IGMP v2/v3 proxy functionality it also delivers video. Throughput ranges up to 5.7 Mbps on 2 wires are made possible with G.SHDSL Annex F & G support, and interoperability covers all major G.SHDSL COs. This is triple-play at your fingertips!

The extra BRI port solves many VoIP network integration problems encountered in real-world installations. The port can synchronize the gateway, and it can be used as a local PSTN breakout port for survivability. It can also be used to shorten the time of number portability—accepting incoming calls through the breakout port while making outgoing calls on the cost-saving VoIP network. With the life-line relay, the port even enables integration of an ISDN emergency terminal powered from the public ISDN.

Like every SmartNode, the 4650 Series models are state-of-the-art VoIP gateways with outstanding interoperability for fax (T.38 and G.711 fallback) and voice. SmartNode products provide seamless network integration, continuous trouble-free operation and cost effective deployment to protect your investments for the future.

Visit www.patton.com for more information.



SmartNode 4650 with G.SHDSL.bis

3/5 Ports BRI ISDN VoIP

3 or 5 ISDN BRI So ports, 4 or 8 low-bandwidth voice or T.38 fax calls. Advanced adaptive traffic management and shaping for maximum voice quality. Voice prioritization and DownStreamQoS™

G.SHDSL.bis Broadband Access

Complete Access Router with integrated G.SHDSL.bis WAN interface. Up to 5.7 Mbps symmetrical throughput, supporting ATM QoS. Supports multiple PVC, VLAN, and DSLAM interoperability.

Full Telephony Features

SessionRouter™ allows flexible call routing and numbering plan adaptations, CLIP/CLIR, hold, AOC transfer, and much more.

Management & Provisioning

Web-based management, SNMP, command line interface, & auto-provisioning for automated configuration & SW upgrades.

Full VoIP protocol support

SIPv2, H.323v4, MGCP/IUA, ISDN, DSS1, QSIG, T.38, fax and modem bypass, DTMF relay.*


Outstanding Interoperability

Interoperable for voice and T.38 fax with leading SIP service providers, soft-switch vendors, and Asterisk™ IP-PBX.

PATTON

- ✓ 2-wire G.SHDSL.bis broadband access
- ✓ 3 or 5 ISDN BRI So ports with integrated life-line failover relay and terminal power
- ✓ 4 or 8 simultaneous low-bandwidth voice or T.38 fax calls
- ✓ Triple-play capable with IGMP v2/v3 snooping and proxy

Network Integration

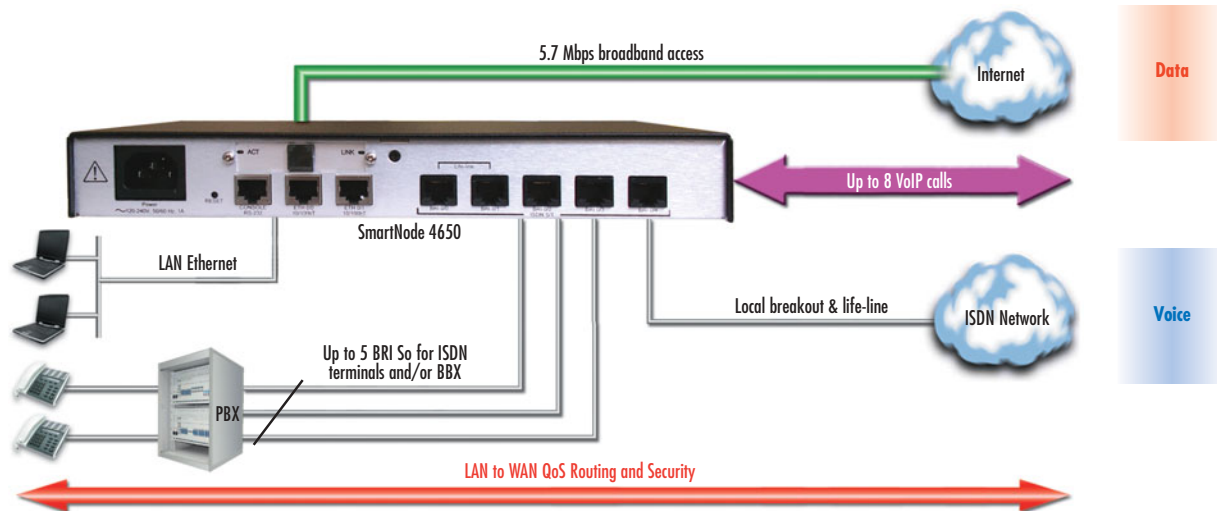

Specifications*

Voice Signaling

SIPv2 • H.323v4 • MGCP/IUA • SIP call transfer, redirect • Overlap or en-bloc dialing • DTMF in-band, out-of-band • Configurable tones

Broadband Access

2-wire G.SHDSL ITU-T G.991.2, Annex A, B, F, G • Up to 5.7Mbps • PPPoE • 8 PVCs, each UBR, CBR or VBR-rt selectable • 1.610 OAM F4/F5 support • G.994.1 (G.hs)

Call Routing & Services

Regular expression number matching • Regular expression number manipulation • Least Cost Routing • Number blocking • Short-Dialing • Digit collection • Distribution- and Hunt- Groups

ISDN

3/5 BRI So ports, RJ-45 • NT/TE configurable per port • Built-in line power on each port (total 4W) • DSS1, Q.921, Q.931. NTT-64 • Point-point and point-multipoint • Lifeline Bypass Relay • Optional QSIG support**

Voice Processing

G.711m/A-law • G.723.1 (6.4 kbps) • G.729, 729a, 729ab (8 kbps) • G.726 (16, 24, 32, 40 kbps) • G.168 echo cancellation (25 ms) • 4/8 simultaneous low-bandwidth voice or T.38 fax calls • Transparent ISDN data • Silence suppression and comfort noise • Adaptive and configurable dejitter buffer • Configurable packet length

IP Quality of Service

Voice priority, DownStreamQoS™ • Traffic

Management, shaping policing • IEEE 802.1p, IEEE 802.1Q, 4096 VLANs (Tag insertion/deletion), TOS, DiffServ Labeling

Connectivity

Two 10/100bt Ethernet ports • Auto-MDIX • DHCP Client • PPPoE Client (multi-session) • IP Multi-Netting, VLAN, Secondary IP • IPv4, RIPv2, ICMP • Dynamic and static NAT and NATP • ACL Firewall • DNS, DynDNS • DHCP Server • SNTP Client • Optional IPsec VPN (DES, 3DES, AES)

Management

Web-based GUI • Fully Documented CLI • Telnet and HTTP access • TFTP configuration up- and download • TFTP firmware upgrade • SNMPv1 agent (MIB II and private MIB) • Built-in diagnostic tools • Secure Auto-Provisioning

Power & Packaging

Desktop metal chassis
Dimensions: 11.0W x 1.5H x 6.2D in.
(28W x 3.9H x 15.7D cm)
Weight: < 21 oz (600 g)
Power Consumption < 10 W

Operating Environment

Operating temperature: 32–104°F (0–40°C)
Operating humidity: up to 90%, non-condensing

Compliance

FCC Part 15 Class A (US EMC)
CE per RTTE 99/5/EC (EMC and LVD)
Safety—EN60950
TBR-3 (ISDN BRI/So)

* Specifications subject to change without notice.

** Requires optional license.

Ordering Information

SN4654/3BISG/UI: 3 BRI/So 4-call VoIP Router, Dual 10/100 Ethernet, G.SHDSL interface, Internal 90–250V power

SN4658/5BISG/UI: 5 BRI/So 8-call VoIP Router, Dual 10/100 Ethernet, G.SHDSL interface, Internal 90–250V power

Note: Please indicate country specific power cord at time of ordering

Software options (ordered separately)

SNSW-VPNI: License Key for IPsec VPN (DES, 3DES, AES)

SNSW-QSIG1: License Key for QSIG

