

Konftel 300Wx Quick Start Guide



SD memory card port

It is possible to record a call in progress and use the Konftel 300Wx as a dictaphone.

Press the  button to start and stop recording. Recordings can be accessed via the menu.


The **Konftel 300Wx** is a battery-driven wireless conference phone that can be connected to DECT systems, mobile phones or PCs. It can be connected to a Konftel DECT base station or any GAP-compatible DECT system.

A user guide with detailed instructions about connectivity options and features is available on our website: www.konftel.com/300wx.

LEDs

Flashing blue	Incoming call
Steady blue light	Call in progress
Flashing red	Hold, microphone and speaker turned off
Steady red light	Mute, microphone turned off


Display symbols

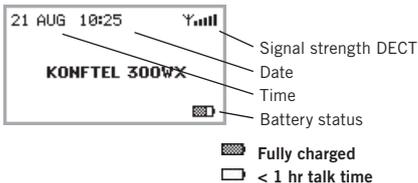


Charging the battery

Charge the battery by placing the Konftel 300Wx on the charging stand or plug the power cable into the Konftel 300Wx.

A fully-charged battery provides up to 48 hours of talk time. The Konftel 300Wx lets you know when there is less than one hour of talk time left.



DESCRIPTION

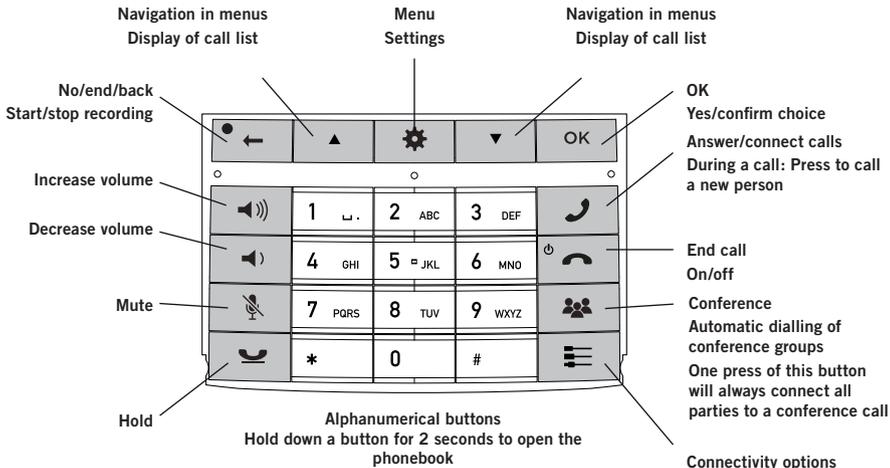

NAVIGATE IN MENUS AND MAKE SETTINGS

The Konftel 300Wx menu contains the following options:

CALL LIST
PHONE BOOK
CONF GUIDE
RECORDING
SETTINGS
STATUS

- ⇒ Press **⚙**.
- ⇒ Select the option you want from the menu using the arrow keys. Press **OK** to confirm.
- ⇒ Cancel the setting or go back one level in the menu by pressing **◀**.
- ⇒ Quit the menu by pressing **⚙** again.
- ⓘ Note that after you have made changes to a setting, you must press **OK** to activate the setting.


GETTING STARTED

BASE STATION REGISTRATION

- ⇒ Put the base station in registration mode.
- ⇒ Select **⚙** > **SETTINGS** > **DECT** > **REGISTER**.
- ⇒ Select a base (1–4).
- ⇒ Enter the base station's PIN code.
- ⓘ The default code is **0000** for the *Konftel DECT base station*.

*The conference telephone will now search for a base station. The base station has to be in registration mode. If registration was successful, the word **SUCCESS** will appear in the display.*

The conference phone is now ready to use

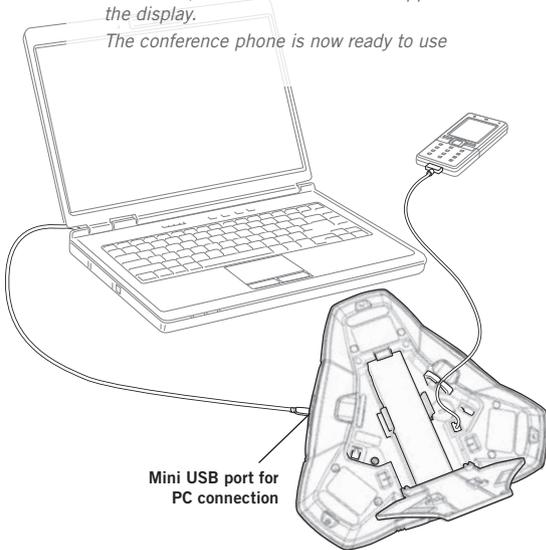

USING A COMPUTER

- ⇒ Connect the Konftel 300Wx to a computer using the USB cable provided.
- ⇒ Check that **Konftel 300Wx USB Audio** is set as the sound device in the computer's settings.

Making VoIP calls

- ⇒ Make the call (or answer an incoming call) using the computer's VoIP software, for example a web conference software, Microsoft Lync® or Skype®.

USING A MOBILE PHONE

- ⇒ Connect a mobile phone using an accessory cable.
- ⇒ Press the **☰** key. Select **MOBILE** and press **OK** to confirm.

Making mobile calls

- ⇒ Press **☎** to activate the Konftel 300Wx.
- ⇒ Connect the call with the mobile phone.

ANSWERING AND MAKING CALLS

- ⇒ Press  to answer an incoming call.
- ⇒ Dial the number and press  to make a call.
- ⇒ Press an arrow key to open a call list containing previously dialled numbers. Call using .
- ⇒ Press and hold an alphanumeric button for two seconds to call a contact in the phonebook.

DURING A CALL

- ⇒ Adjust the speaker volume using the keys  and .
- ⇒ Press  to turn off the microphone.
- ⇒ Press  to put the call on hold.
Both the microphone and the speaker are turned off and the call is on hold.
- ⇒ Press the same button again to reconnect the call.

- ① Note that different PBXs may require different signals. If you experience problems making multi-party calls: Please refer to the manual for information about how to make necessary settings and to your telephone administrator or service provider for specific settings.

ADDING A PARTY TO A CALL

- ⇒ Press the  button during the call.
Calls in progress are put on hold and a second dialling tone is heard.
- ⇒ Dial the second participant's number, press and wait for an answer.
- ⇒ Press the  button to connect all the meeting participants.

THE CONFERENCE GUIDE

You can create groups of up to six people via

 > **CONF. GUIDE** > **ADD GROUP**.

- ⇒ Press the  button and choose a conference group. Press **OK** if you want to see who is in the group and  to make the call.
 - ⇒ Follow the instructions in the guide and answer with **OK** or .
- Calls in progress are put on hold when the next participant calls.*
- When all participants have been called, they are automatically connected for a conference call.*