



CR10wiNG

Future-ready Security with Wi-Fi Access Point for SOHO/ROBO networks

Data Sheet 

CR10wiNG is the Next Generation Unified Threat Management appliance with Wi-Fi access points that offers “the fastest UTM’s made for SMBs” to small offices with high performance security over WLAN. Combined with security over wired networks offered by its range of UTM appliances, Cyberoam enables organizations to overcome the physical limitations of securely accessing network resources and offers more user flexibility, user productivity and reduced network ownership costs.

The best-in-class hardware along with software to match, enables the NG series appliances to offer unmatched throughput speeds, compared to any other UTM appliance in this market segment. This assures support for future IT trends in organizations like high-speed Internet and rising number of devices – offering future-ready security to small office networks.


Cyberoam’s Layer 8 technology that treats user-identity as the 8th Layer or the HUMAN layer in the protocol stack, works even in WLAN environments, to allow Identity-based security policies in dynamic IP environment.

The ‘Next-Generation’ UTM Series for SOHO:


Faster performance, broader coverage



Cyberoam’s **Layer 8 Technology** treats “User Identity” as the 8th Layer in the protocol stack

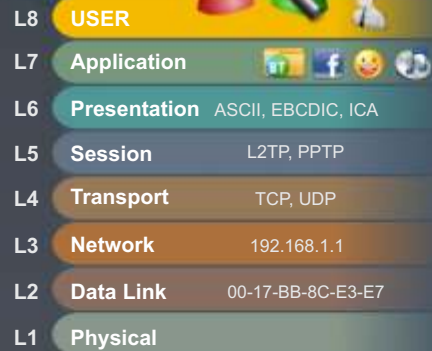

Cyberoam UTM offers security across Layer 2-Layer 8 using Identity-based policies



Cyberoam UTM features assure Security, Connectivity, Productivity

Security

Network Security

- Firewall
- Intrusion Prevention System
- Wireless Security

Content Security

- Anti-Virus/Anti-Spyware
- Anti-Spam
- HTTPS/SSL Content Security

Administrative Security

- Next-Gen UI



Connectivity

Business Continuity

- Multiple Link Management

Network Availability

- VPN
- 3G/4G/WiMAX Connectivity

Future-ready Connectivity

- “IPv6 Ready” Gold Logo



Productivity

Employee Productivity

- Content Filtering
- Instant Messaging Archiving & Controls

IT Resource Optimization

- Bandwidth Management
- Traffic Discovery
- Application Visibility & Control

Administrator Productivity

- Next-Gen UI



Specification

Interfaces

Copper GbE Ports	3
Configurable	
Internal/DMZ/WAN Ports	Yes
Console Ports (RJ45/DB9)	1
USB Ports	2

Built-in Wireless LAN

Wireless Standards	IEEE 802.11 a/b/g/n (WEP, WPA, WPA2, 802.11i, TKIP, AES, PSK)
--------------------	---

Antenna	Detachable 2x2 MIMO
---------	---------------------

Access Points	Up to 8 SSID
---------------	--------------

Transmit Power	802.11a: 12dBm ± 2dBm
	802.11b: 17dBm ± 2dBm
	802.11g: 16dBm ± 2dBm
	802.11an (HT20): 12dBm ± 2dBm@MCS7
	802.11an (HT40): 11dBm ± 2dBm@MCS7
	802.11gn (HT20): 15dBm ± 2dBm@MCS7
802.11gn (HT40): 14dBm ± 2dBm@MCS7	

Receiver Sensitivity	802.11a: ≤ -76dBm@54Mbps
	802.11b: ≤ -85dBm@11Mbps
	802.11g: ≤ -76dBm@54Mbps
	802.11gn (HT20): ≤ -75dBm@MCS7
	802.11an (HT40): ≤ -72dBm@MCS7
	802.11an (HT20): ≤ -74dBm@MCS7
802.11an (HT40): ≤ -71dBm@MCS7	

Frequency Range	2.412 GHz - 2.472 GHz, 5.200 GHz - 5.825 GHz
-----------------	--

Data Rate	11a: Up to 54Mbps
	11b: Up to 11Mbps
	11g: Up to 54Mbps
	11n: Up to 300Mbps

System Performance*

Firewall Throughput (UDP)	400 (Mbps)
Firewall Throughput (TCP)	300 (Mbps)
New sessions/second	2,000
Concurrent sessions	27,500
IPSec VPN Throughput	100 (Mbps)
No. of IPSec Tunnels	25
SSL VPN Throughput	25 (Mbps)
Anti-Virus Throughput	100 (Mbps)
IPS Throughput	90 (Mbps)
UTM Throughput	60 (Mbps)

Stateful Inspection Firewall

- Layer 8 (User - Identity) Firewall
- Multiple Security Zones
- Access Control Criteria (ACC) - User - Identity, Source & Destination Zone, MAC and IP address, Service
- UTM policies - IPS, Web Filtering, Application Filtering, Anti-Virus, Anti-Spam and Bandwidth Management
- Layer 7 (Application) Control & Visibility
- Access Scheduling
- Policy based Source & Destination NAT
- H.323, SIP NAT Traversal
- 802.1q VLAN Support
- DoS & DDoS Attack prevention
- MAC & IP-MAC filtering and Spoof prevention

Gateway Anti-Virus & Anti-Spyware

- Virus, Worm, Trojan Detection & Removal
- Spyware, Malware, Phishing protection
- Automatic virus signature database update
- Scans HTTP, HTTPS, FTP, SMTP/S, POP3, IMAP, IM, VPN Tunnels
- Customize individual user scanning
- Scan and deliver by file size
- Block by file types
- Add disclaimer/signature

Gateway Anti-Spam

- Inbound Scanning
- Real-time Blacklist (RBL), MIME header check
- Filter based on message header, size, sender, recipient
- Subject line tagging
- IP address Black list/White list
- Redirect Spam mails to dedicated email address
- Image-based Spam filtering using RPD Technology
- Zero hour Virus Outbreak Protection
- IP Reputation-based Spam filtering

Intrusion Prevention System

- Signatures: Default, Custom
- IPS Policies: Multiple, Custom
- User-based policy creation
- Automatic Signature updates
- Protocol Anomaly Detection
- DDoS attack prevention
- SCADA-aware IPS with pre-defined category for ICS and SCADA signatures

Web Filtering

- On-cloud Web Category Database
- URL, keyword, File type block
- Categories: Default(89+), Custom
- Protocols supported: HTTP, HTTPS
- Block Malware, Phishing, Pharming URLs
- Schedule-based access control
- Visibility and Controls for HTTPS based Micro-Apps like Facebook chat, Youtube video upload
- Custom block messages per category
- Block Java Applets, Cookies, Active X
- CIPA Compliant
- Data leakage control via HTTP, HTTPS upload

Application Filtering

- Inbuilt Application Category Database
- Schedule-based access control
- Block
 - Proxy and Tunnel
 - File Transfer
 - Social Networking
 - Streaming Media
 - Storage and Backup
- Layer 7 (Applications) & Layer 8 (User - Identity) Visibility
- Securing SCADA Networks
 - SCADA/ICS Signature-based Filtering for Protocols - Modbus, DNP3, IEC, Bacnet, Omron FINS, Secure DNP3, Longtalk
 - Control various Commands and Functions

Virtual Private Network

- IPSec, L2TP, PPTP
- Encryption - 3DES, DES, AES, Twofish, Blowfish, Serpent
- Hash Algorithms - MD5, SHA-1
- Authentication - Preshared key, Digital certificates
- IPSec NAT Traversal
- Dead peer detection and PFS support
- Diffie Hellman Groups - 1, 2, 5, 14, 15, 16
- External Certificate Authority support
- Export Road Warrior connection configuration
- Domain name support for tunnel end points
- VPN connection redundancy
- Overlapping Network support
- Hub & Spoke VPN support

SSL VPN

- TCP&UDP Tunneling
- Authentication - Active Directory, LDAP, RADIUS, Cyberoam
- Multi-layered Client Authentication - Certificate, Username/Password
- User & Group policy enforcement
- Network access - Split and Full tunneling
- Browser-based (Portal) Access - Clientless access
- Lightweight SSL VPN Tunneling Client
- Granular access control to all the Enterprise Network resources
- Administrative controls - Session timeout, Dead Peer Detection, Portal customization
- TCP-based Application Access - HTTP, HTTPS, RDP, TELNET, SSH

Instant Messaging (IM) Management

- Yahoo and Windows Live Messenger
- Virus Scanning for IM traffic
- Allow/Block Login
- Allow/Block File Transfer
- Allow/Block Webcam
- Allow/Block one-to-one/group chat
- Content-based blocking
- IM activities Log
- Archive files transferred
- Custom Alerts

Wireless WAN

- USB port 3G/4G and WiMAX Support
- Primary WAN link
- WAN Backup link

Bandwidth Management

- Application and User Identity based Bandwidth Management
- Guaranteed & Burstable bandwidth policy
- Application & User Identity based Traffic Discovery
- Multi WAN bandwidth reporting
- Category-based bandwidth restriction

User Identity and Group Based Controls

- Access time restriction
- Time and Data Quota restriction
- Schedule based Committed and Burstable Bandwidth
- Schedule based P2P and IM Controls

Networking

- Failover - Automated Failover/Failback, Multi-WAN failover, 3G Modem failover
- WRR based load balancing
- Policy routing based on Application and User
- IP Address Assignment - Static, PPPoE, L2TP, PPTP & DDNS Client, Proxy ARP, DHCP server, DHCP relay
- Support for HTTP Proxy
- Dynamic Routing: RIP v1& v2, OSPF, BGP, PIM-SIM, Multicast Forwarding
- Parent Proxy support with FQDN
- "IPv6 Ready" Gold Logo

Administration & System Management

- Web-based configuration wizard
- Role-based access control
- Firmware Upgrades via Web UI
- Web 2.0 compliant UI (HTTPS)
- UI Color Styler
- Command Line Interface (Serial, SSH, Telnet)
- SNMP (v1, v2c, v3)
- Multi-lingual support: Chinese, Hindi, French, Korean
- Cyberoam Central Console (Optional)
- NTP Support

User Authentication

- Internal database
- Active Directory Integration
- Automatic Windows/RADIUS Single Sign On
- External LDAP/RADIUS database integration
- Thin Client support - Microsoft Windows Server 2003
- 2-factor authentication: 3rd party support**
- Terminal Services and Citrix XenApp
- External Authentication - Users and Administrators
- User/MAC Binding
- Multiple Authentication servers

Logging/Monitoring

- Graphical real-time logging and monitoring
- Syslog support
- Log Viewer - Firewall, IPS, Web filter, Anti Virus, Anti Spam, Authentication, System and Admin Events

IPSec VPN Client***

- Inter-operability with major IPSec VPN Gateways
- Supported platforms: Windows 2000, WinXP 32/64-bit, Windows 2003 32-bit, Windows 2008 32/64-bit, Windows Vista 32/64-bit, Windows 7 32/64-bit
- Import Connection configuration

Certification

- ICSA Firewall - Corporate
- Checkmark UTM Level 5 Certification
- VPN-C - Basic and AES interoperability
- "IPv6 Ready" Gold Logo

Hardware Specifications

Memory	1GB
Storage	4GB

Compliance

CE
FCC

Dimensions

H x W x D (inches)	1.35 x 8.75 x 6.8
H x W x D (cms)	3.43 x 22.23 x 17.3
Weight	1.10 kg, 2.42 lbs

Power

Input Voltage	100-240 VAC
Consumption	22W
Total Heat Dissipation (BTU)	75

Environmental

Operating Temperature	0 to 40 °C
Storage Temperature	-25 to 75 °C
Relative Humidity (Non condensing)	10 to 90%

*Antivirus, IPS and UTM performance is measured based on HTTP traffic as per RFC 3511 guidelines. Actual performance may vary depending on the real network traffic environments.

For details, refer Cyberoam's Technical Alliance Partner list on Cyberoam website. *Additional Purchase Required.

Applicable to Hardware Version 1.0 – 23/08/2013

Copyright © 1999-2015 Cyberoam Technologies Pvt. Ltd. All Rights Reserved.
Cyberoam and Cyberoam logo are registered trademarks of Cyberoam Technologies Pvt. Ltd. Although Cyberoam has attempted to provide accurate information, Cyberoam assumes no responsibility for accuracy or completeness of information neither is this a legally binding representation. Cyberoam has the right to change, modify, transfer or otherwise revise the publication without notice. 1.0-10.6.2-080515



Toll Free Numbers

USA : +1-800-686-2360 | India : 1-800-301-00013

APAC/MEA : +1-877-777-0368 | Europe : +44-808-120-3958