

Grandstream Networks, Inc.

GXV3240

IP Multimedia Phone for Android[™]

User Guide









COPYRIGHT

©2019 Grandstream Networks, Inc. <u>http://www.grandstream.com</u>

All rights reserved. Information in this document is subject to change without notice. Reproduction or transmittal of the entire or any part, in any form or by any means, electronic or print, for any purpose without the express written permission of Grandstream Networks, Inc. is not permitted.

The latest electronic version of this guide is available for download here:

http://www.grandstream.com/support

Grandstream is a registered trademark and Grandstream logo is trademark of Grandstream Networks, Inc. in the United States, Europe and other countries.

CAUTION

Changes or modifications to this product not expressly approved by Grandstream, or operation of this product in any way other than as detailed by this guide, could void your manufacturer warranty.

WARNING

Please do not use a different power adaptor with devices as it may cause damage to the products and void the manufacturer warranty.





FCC Caution

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Information (SAR)

This device is designed and manufactured not to be exceeded the emission limits for exposure to radio frequency RF energy set by the Federal Communications Commission of the United States. The exposure standard for wireless devices employing a unit of measurement is known as the Specific Absorption Rate (SAR), and the SAR limit set by FCC is 1.6 W/kg.

This device is complied with SAR for general population/uncontrolled exposure limits in ANSI/IEEE C95.1-1992, and has been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C. This device has been tested, and meets the FCC RF exposure guidelines when tested with the device directly contacted to the body. RF exposure compliance with anybody-worn accessory, which contains metal, was not tested and certified, and use such body-worn accessory should be avoided.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Hereby, Grandstream declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.





GNU GPL INFORMATION

GXV3240 firmware contains third-party software licensed under the GNU General Public License (GPL). Grandstream uses software under the specific terms of the GPL. Please see the GNU General Public License (GPL) for the exact terms and conditions of the license.

Grandstream GNU GPL related source code can be downloaded from Grandstream web site from: http://www.grandstream.com/sites/default/files/Resources/gxv32xx_gpl.zip





Table of Content

DOCUMENT PURPOSE	16
CHANGE LOG	17
Firmware Version 1.0.3.224	17
Firmware Version 1.0.3.219	17
Firmware Version 1.0.3.210	17
Firmware Version 1.0.3.207	17
Firmware Version 1.0.3.198	17
Firmware Version 1.0.3.193	17
Firmware Version 1.0.3.187	17
Firmware Version 1.0.3.186	17
Firmware Version 1.0.3.170	
Firmware Version 1.0.3.177	
Firmware Version 1.0.3.171	
Firmware Version 1.0.3.162	
Firmware Version 1.0.3.158	
Firmware Version 1.0.3.144	
Firmware Version 1.0.3.131	
Firmware Version 1.0.3.92	19
Firmware Version 1.0.3.75	19
Firmware Version 1.0.3.62	19
Firmware Version 1.0.3.55	19
Firmware Version 1.0.3.46	19
Firmware Version 1.0.3.37	19
Firmware Version 1.0.3.30	19
Firmware Version 1.0.3.22	20
Firmware Version 1.0.3.6	20
Firmware Version 1.0.1.54	20
Firmware Version 1.0.1.39	20
Firmware Version 1.0.1.29	20
WELCOME	21
PRODUCT OVERVIEW	
Feature Highlights	22
GXV3240 Technical Specifications	
GETTING STARTED	25
Equipment Packaging	25
GXV3240 Phone Setup	





Using the Phone Stand	
Using the Slots for Wall Mounting	
Description of the GXV3240	27
Connecting the GXV3240	
GXV3240 Extension Module (GXP2200EXT)	
GETTING TO KNOW GXV3240	
Use the Touchscreen	
Use the Desktop	
Desktop Menu	
Add Application Shortcut to Desktop	
Add Widget to Desktop	
Manage Desktop Items	
Set Wallpapers	
Manage Running Applications	
Idle Screen	
Switch Idle Screens	
Set Up Idle Screen	
Use the Status Bar	
Notifications in Status Bar	
System Settings in Status Bar	
Use the GXV3240 Keypad	
Keypad Shortcut Functions	
Use the Onscreen Keyboard	
Use the Message Waiting Indicator	47
MAKE PHONE CALLS	
Register SIP Accounts	48
Account Status	
Configure SIP Account	
Set Programmable Keys on Unregistered Account	
Dial a Number Directly	
, Redial	
Dial a Number via Contacts	
Dial a Number via Call History	
Direct IP Call	
Answer a Call	
Single Incoming Call	
Multiple Calls/Call Waiting	
Call Progress Status	
Call Hold	
Call Recording	59





Mute	
Turn on Video during Audio Call	
Call Details during Call	
DTMF During Call	
Switch Audio Channel during Call	63
Call Transfer	64
Blind Transfer	
Attended Transfer	
6-Way Conference	67
Initiate Conference	
Remove Party from Conference	
End Conference	
Hold and Resume Conference	
Auto Conference Mode	
Missed Call	70
DND (Do Not Disturb)	71
Voicemail/Message Waiting Indication	71
Call Forward	72
Multi-Purpose Keys	74
Shared Call Appearance (SCA)	76
Call Features	77
CONTACTS	
CONTACTS	
CONTACTS Local Contacts Add Single Contacts	
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts	
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts Download Contacts	
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts Download Contacts	
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts Download Contacts Search Contacts Use Contacts	80 81 82 83 83 84 84 84 84
CONTACTS	80 81 82 83 83 84 84 84 84 84 84
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts Download Contacts Search Contacts Use Contacts Make a Call to Contacts Send SMS Message to Contacts	80 81 82 83 83 84 84 84 84 84 84 84
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts Download Contacts Search Contacts Use Contacts Make a Call to Contacts Send SMS Message to Contacts Select Contacts	80 81 82 83 83 84 84 84 84 84 84 84 84 85
CONTACTS. Local Contacts Add Single Contacts Import/Export Contacts Download Contacts. Search Contacts Use Contacts Make a Call to Contacts Send SMS Message to Contacts. Select Contacts Add Contacts to Favorites	80 81 82 83 83 84 84 84 84 84 84 84 84 85 85 86
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts Download Contacts Search Contacts Use Contacts Make a Call to Contacts Send SMS Message to Contacts Select Contacts Add Contacts to Favorites Edit Contacts	80 81 82 83 83 84 84 84 84 84 84 84 85 85 86 86
CONTACTS	80 81 82 83 83 84 84 84 84 84 84 84 84 84 85 86 86 86 86
CONTACTS. Local Contacts	80 81 82 83 83 84 84 84 84 84 84 84 84 85 86 86 86 86 86 86
CONTACTS. Local Contacts Add Single Contacts Import/Export Contacts Download Contacts Search Contacts Use Contacts Make a Call to Contacts Send SMS Message to Contacts Select Contacts Add Contacts to Favorites Edit Contacts to Favorites Send Contacts to Desktop Shortcut Share Contacts to Blacklist	80 81 82 83 83 84 84 84 84 84 84 84 84 84 85 86 86 86 86 86 86 86
CONTACTS Local Contacts Add Single Contacts Import/Export Contacts Download Contacts Search Contacts Use Contacts Make a Call to Contacts Send SMS Message to Contacts. Select Contacts Add Contacts to Favorites Edit Contacts Send Contacts to Desktop Shortcut Share Contacts via Bluetooth Add Contacts to Blacklist Add Group	80 81 82 83 83 84 84 84 84 84 84 84 85 86 86 86 86 86 86 86 86 86 86 87





BROADWORKS XSI CONTACTS	
BLACKLIST	
Block History	
Restore Blocked Number	
Delete Block History	
Edit Blacklist	
Add Blacklist	
Edit Blacklist	
Delete Blacklist	
Blacklist Settings	
CALL HISTORY	
Local Call History	
Dial Out from Call History	
Call History Options	
Delete Call History	
Call History Details	
Broadworks XSI Call History	
SMS	
View SMS	
Create New SMS	
Delete SMS	
CALENDAR	
Sign in Calendar	
View Calendar	
Create Event	
Calendar Options	
EMAIL	
Sign in Email	
Email Options	
Send Email	
Email Folders	
Multiple Email Accounts	
GS MARKET	
View APPS	
Search APPS	
Update APPS	
Uninstall APPS	





TOOLS	110
File Manager	110
Copy and Paste Files	110
Move Files	
Send Files	112
Delete Files	113
Rename a File	113
FTP SERVER	115
RECORDER	117
Normal Recorder	117
Files operations	118
Call Recorder	118
Recorded Files Settings	119
Downloads	
IP Location	
Diagnosis	
CAMERA	
Take Picture	
Record Video	
Camera Settings	
Angle Adjustment	
CONNECTING GXV3240 TO GDS3710 DOOR SYSTEM	
MULTIMEDIA	
Gallery	126
Screensaver	
Music	
Play Music	
Edit Music	
Sort Music	
Search Music	
Create Playlist	
Edit Playlist	
BROSWER	
RSS NEWS	
Add RSS Widget	
Use RSS Widget	
RSS Widget Settings	





Weather	
Add Weather Widget	
Use Weather Widget	
Weather Settings	
BS-IM&P	
ACTIONURL	139
ACCESSIBILITY	
PNP	
Set Up PNP Application	
Enable PNP Feature	
Enable from Web Page	
Enable from LCD	
Use PNP Feature	
CONNECT TO NETWORK AND DEVICES	144
Ethernet	
Wi-Fi	
Turn On/Off Wi-Fi	
Add Wi-Fi Networks	
Wi-Fi Settings Shortcut	
Bluetooth	
Turn On/Off Bluetooth	
Change Bluetooth Device Name	
Pair GXV3240 with a Bluetooth Device	
Unpair a Bluetooth Device	
Bluetooth Settings Shortcut	
EHS Headset	
USB Headset	
USB	
SD Card	
HDMI Device	
EXPERIENCING THE GXV3240 APPLICATION PHONE	





Table of Tables

Table 1: GXV3240 Features in a Glance	22
Table 2: GXV3240 Technical Specifications	23
Table 3: Equipment Packaging	25
Table 4: GXV3240 Connectors	27
Table 5: GXP2200EXT Packaging	28
Table 6: GXV3240 Status Bar Notification Icons	40
Table 7: GXV3240 Keys	44
Table 8: GXV3240 MWI LED Status	47
Table 9: GXV3240 Feature Code	77
Table 10: Diagnosis troubleshooting tests	122





Table of Figures

Figure 1: GXV3240 Package Content	25
Figure 2: Slots For The Wall Mount And Phone Stand On The GXV3240	26
Figure 3: Tab On The Handset Cradle	26
Figure 4: GXV3240 Front View	27
Figure 5: GXV3240 Back View	
Figure 6: GXV3240 Back View with GXP2200EXT	29
Figure 7: GXV3240 Default Home Screen	30
Figure 8: GXV3240 Onscreen Menu	30
Figure 9: GXV3240 Finger Gestures on the Touch Screen	31
Figure 10: GXV3240 Desktop Menu	32
Figure 11: Add Application Shortcut to the Desktop	33
Figure 12: Add Widget to the Desktop	34
Figure 13: Open Clock Widget	34
Figure 14: Resize Digital Clock Widget	35
Figure 15: Move Clock Widget	
Figure 16: Remove Clock Widget	36
Figure 17: GXV3240 Choose Wallpaper	37
Figure 18: GXV3240 Recent Applications	37
Figure 19: Set up Home Idle Screen	38
Figure 20: Delete Idle Screen	39
Figure 21: GXV3240 Top Status Bar	39
Figure 22: GXV3240 Top Status Bar – Notification	40
Figure 23: System Settings in Status Bar	43
Figure 24: GXV3240 Keyboard	44
Figure 25: GXV3240 Onscreen Keyboard - English Keyboard	46
Figure 26: GXV3240 Onscreen Keyboard - Lowercase and Uppercase	46
Figure 27: English Keyboard - Number and Symbols	46
Figure 28: GXV3240 Account Widget	48
Figure 29: GXV3240 Dial Screen	49
Figure 30: Disable Video Call Feature on Dial Screen	49
Figure 31: GXV3240 Programmable Keys	50
Figure 32: GXV3240 View Contacts	51
Figure 33: GXV3240 Call History	52
Figure 34: Direct IP Call	53
Figure 35: Direct IP Call via IPv6	53
Figure 36: Single Incoming Call - Audio	54





Figure 37: Single Incoming Call - Video	55
Figure 38: Single Incoming Call – Preview-1	55
Figure 39: Single Incoming Call – Preview-2	56
Figure 40: Prompt displayed when pressing new call during preview	56
Figure 41: Single Incoming Call - Call Forward-1	57
Figure 42: Single Incoming Call - Call Forward-2	57
Figure 43: Call Waiting	58
Figure 44: Call Progress Status Bar	58
Figure 45: Call On Hold	59
Figure 46: GXV3240 Call Recording	59
Figure 47: GXV3240 Call Mute	60
Figure 48: Turn on Video during Audio Call	61
Figure 49: Accept Video during Audio Call	61
Figure 50: Select Call Details During Video Call	62
Figure 51: Call Details	62
Figure 52: DTMF During Call	63
Figure 53: Switch Audio Channel during Call 1	64
Figure 54: Switch Audio Channel during Call 2	64
Figure 55: Blind Transfer	65
Figure 56: Attended Transfer	65
Figure 57: Attended Transfer - Transferring	66
Figure 58: Attended Transfer - Split	66
Figure 59: Transfer list screen	67
Figure 60: GXV3240 Conference Screen	68
Figure 61: GXV3240 Conference - Add New Call to the Conference	68
Figure 62: GXV3240 Conference - Add Existing Call to Conference	69
Figure 63: 4-way Conference Call Established	69
Figure 64: Missed Call Screen	70
Figure 65: Enable/Disable DND	71
Figure 66: Retrieve Voicemail	72
Figure 67: Call Forward when DND	73
Figure 68: Call Forward - Unconditional	73
Figure 69: Call Forward - Time Based	73
Figure 70: Call Forward - Busy/No Answer/DND	74
Figure 71: GXV3240 MPK APP - Add Number	75
Figure 72: GXV3240 MPK APP - Add Number from Contacts	75
Figure 73: GXV3240 MPK APP - Number List	75
Figure 74: GXV3240 SCA Settings on LCD	76
Figure 75: GXV3240 SCA Settings on Web UI	77
Figure 76: GXV3240 Contacts	80
Figure 77: GXV3240 Local Contacts	81





Figure 78: GXV3240 Contacts - Add New Contact	81
Figure 79: Add contacts from DialPad	82
Figure 80: GXV3240 Contacts - Import Contacts	
Figure 81: GXV3240 Contacts - Export Contacts	83
Figure 82: GXV3240 Contacts - Download Contacts	84
Figure 83: GXV3240 Contacts - Select Contacts	85
Figure 84: GXV3240 Contacts - Contacts Options	85
Figure 85: Add Contacts to Favorites	
Figure 86: GXV3240 Contacts - Add New Group	87
Figure 87: GXV3240 Contacts – Contact Options	87
Figure 88: GXV3240 Contacts - Storage Status	88
Figure 89: GXV3240 Contacts Options- Account	88
Figure 90: Add Account to Sync up in Contacts	89
Figure 91: Add Google Account to Sync up in Contacts	89
Figure 92: Sign in Google Account	89
Figure 93: Restore Blocked Number	92
Figure 94: GXV3240 Blacklist - Add Blacklist	93
Figure 95: Manually Add Number to Blacklist	94
Figure 96: Edit Entry from Blacklist	94
Figure 97: Blacklist Settings	95
Figure 98: GXV3240 Call History	96
Figure 99: GXV3240 Call History	96
Figure 100: GXV3240 Call History – Options	97
Figure 101: GXV3240 Call History - Details	98
Figure 102: GXV3240 SMS Message	99
Figure 103: View SMS Dialog	99
Figure 104: Create New Message	100
Figure 105: Sign In Calendar with Google Account	101
Figure 106: View Calendar	101
Figure 107: View Calendar by Month	102
Figure 108: View Calendar by Day	102
Figure 109: Create Event	102
Figure 110: Sign in Email	103
Figure 111: Select Email Account Type	103
Figure 112: Email Account Type - POP3	104
Figure 113: Email Account Type - IMAP	104
Figure 114: Email Account Type - EXCHANGE	105
Figure 115: Email Account Settings	105
Figure 116: Multiple Email Accounts	106
Figure 117: GXV3240 GS Market	107
Figure 118: GXV3240 GS Market - Downloaded Applications	108





Figure 119: GXV3240 GS Market - Installed Applications	. 108
Figure 120: GXV3240 GS Market - Uninstall Applications	. 109
Figure 121: GXV3240 File Manager - Select File	. 110
Figure 122: File Manager Root Directory	. 110
Figure 123: Paste File	111
Figure 124: GXV3240 File Manager - Select File	111
Figure 125: File Manager Root Directory	. 112
Figure 126: Paste File	. 112
Figure 127: GXV3240 File Manager - Options	. 113
Figure 128: Delete File(s) via File Manager	. 113
Figure 129: Rename File	. 114
Figure 130: FTP Server - Start	. 115
Figure 131: FTP Server - Stop	. 115
Figure 132: FTP Server – Settings	. 116
Figure 133: Normal Recorder	. 117
Figure 134: Normal Recorder - Start Recording	. 117
Figure 135: Normal Recorder - End Recording	. 118
Figure 136: Call Recorder	. 119
Figure 137: Recorder Settings	. 119
Figure 138: Recorder Storage	. 119
Figure 139: Downloads	. 120
Figure 140: GXV3240 Location	. 121
Figure 141: GXV3240 Diagnosis	. 121
Figure 142: GXV3240 Camera	. 123
Figure 143: GXV3240 Camera Settings	. 124
Figure 144: GXV3240 Gallery	. 126
Figure 145: GXV3240 Gallery - Edit Picture	. 127
Figure 146: GXV3240 Gallery - Picture Options	. 127
Figure 147: Use Local Images	. 128
Figure 148: Local Images	. 128
Figure 149: Use Network images	. 129
Figure 150: Network Image Path	. 129
Figure 151: GXV3240 Music - Refresh Music List	. 130
Figure 152: GXV3240 Music - Play a Song	. 130
Figure 153: GXV3240 Music - Options	. 131
Figure 154: GXV3240 Music - Sort Songs	. 131
Figure 155: GXV3240 Music - Create Playlist	. 132
Figure 156: GXV3240 Web Browser	. 133
Figure 157: GXV3240 Browser Menu Options	. 133
Figure 158: Open New Window in Browser	. 134
Figure 159: GXV3240 Web Browser-Bookmarks	. 134





Figure 160: GXV3240 RSS News	
Figure 161: GXV3240 RSS News Settings	
Figure 162: GXV3240 Weather	
Figure 163: GXV3240 Weather Settings	
Figure 164: GXV3240 Weather Update Settings	
Figure 165: Accessibility Settings	
Figure 166: Talkback	140
Figure 167: GXV3240 PNP Settings	143
Figure 168: GXV3240 Connect to Wi-Fi	145
Figure 169: GXV3240 Connect to Wi-Fi-Show Advanced Options	145
Figure 170: Wi-Fi Settings Shortcut	146
Figure 171: GXV3240 Bluetooth - Paired Device	147
Figure 172: Bluetooth Settings Shortcut	148
Figure 173: USB Headset	149
Figure 174: USB Headset Used for Speaking	149
Figure 175: Settings→Display→HDMI	
Figure 176: Settings→Display→HDMI Control	151
Figure 177: Settings→Display→HDMI Audio Channel Switch	151





DOCUMENT PURPOSE

This document describes how to configure the GXV3240 via phone's LCD menu and web UI menu to fully manipulate the phone's features. To learn the advanced functions of GXV3240, please visit http://www.grandstream.com/support to download the latest "GXV3240 Administration Guide".

This guide covers following topics:

- Product Overview
- <u>Getting started</u>
- Getting to know GXV3240
- Make phone calls
- <u>Contacts</u>
- Blacklist
- Call history
- <u>SMS</u>
- <u>Calendar</u>
- Email
- <u>GS market</u>
- Tools
- <u>Recorder</u>
- <u>Camera</u>
- <u>Multimedia</u>
- Browser
- RSS News
- BS IM&P
- Action URL
- <u>PNP</u>
- <u>Connect to network and devices</u>
- <u>Experiencing the GXV3240 applications</u>





CHANGE LOG

This section documents significant changes from previous versions of user guide for GXV3240. Only major new features or major document updates are listed here. Minor updates for corrections or editing are not documented here.

Firmware Version 1.0.3.224

• No Major Changes

Firmware Version 1.0.3.219

No Major Changes

Firmware Version 1.0.3.210

• Supported TLS 1.2 version. [GXV3240 Technical Specifications]

Firmware Version 1.0.3.207

• Added Accessibility Settings in LCD Settings. [ACCESSIBILITY]

Firmware Version 1.0.3.198

• Supported Dutch language. [Multi-language]

Firmware Version 1.0.3.193

• Supported device allows to recover the call with transferred party if the third party does not answer blind transfer from device. [Blind Transfer]

Firmware Version 1.0.3.187

- Removed "Transfer" button when second phone answers the attended transfer.
- Added Wi-Fi serial number in the factory function. [Wi-Fi Serial Number]
- Replaced expired pem certificate.
- Supported auto record under web UI → Advanced Settings → Call Features → Enable Auto Record When Call Established. [Enable Auto Record When Call Established]

Firmware Version 1.0.3.186

- Added Bluetooth patch for BlueBorne vulnerability.
- Supported TLSv1.1 and TLSv1.2.
- Added option to block image gallery options via GUI Cust Tool 3.9.0. [Gallery]
- Supported device displays more Programmable keys in call interface. [DTMF During Call]





Firmware Version 1.0.3.170

- Updated that attended transfer would put the account on hold in the transfer list.
- Updated DUT will prompt for adding new calls or new incoming calls during preview.

Firmware Version 1.0.3.177

- Added Support to set call forward when phone is on DND state [Call Forward Busy/No Answer/DND]
- Supported that DUT would not show unregistered accounts on SMS app. [Create New SMS]
- Added Success notification for setting a recording as ring tone. [Set as ringtone]
- Removed the Setup Wizard which was introduced in 1.0.3.171 after upgrading or factory reset.
- Added timestamp in the exported call recording file name. [Export]
- Added account selection for LDAP calls instead of automatically selecting the first active account when the option is "Default". [LDAP PHONEBOOK]

Firmware Version 1.0.3.171

- Removed "Click to Return Call" animation on status bar. [Call Progress Status]
- Updated dialing interface button "End" to "Cancel".
- Added sending SIP INFO message with "record" header when record key is pressed. [Call Recording]
- Added "Record Mode" to specify the location for saving call recording. [Call Recording]

Firmware Version 1.0.3.162

• Added "Disable RJ9 Headset Auto Detect". [EHS Headset]

Firmware Version 1.0.3.158

- Updated phone to automatically answer paging call after a short reminding tone rather than a long one.
- Added "Add to contacts" button in dial pad if input number does not match any in Contact. [Add to contacts]
- Updated preview function before answering the call would keep playing ringback on caller side.

Firmware Version 1.0.3.144

- Changed FileManager → Internal storage icon. [File Manager]
- Supported new feature code "*2016" to start factory function apk. [Diagnosis]
- Optimized dialer UI response.
- Broadsoft contacts result can automatically match input letter when searching contact. [Broadworks XSI Contacts]

Firmware Version 1.0.3.131

- Supported "Call Detail" for RTCP info report. [Call Details during Call]
- Added prefix MPK Support. [Multi-Purpose Keys]





- Added support headsets via USB port on GXV32xx. [USB Headset]
- Added ability to show the call-in-progress status on GXV32xx panel. [Call Progress Status]
- Added ability to access to the Bluetooth and Wi-Fi Settings menu through quick buttons on taskbar. [Bluetooth Settings Shortcut] / [Wi-Fi Settings Shortcut]
- Removed Lync Setup Application.
- Added ability to launch 3rd party application upon handset off-hook and dialer app.
- Added storage settings for phone recording. [Recorded Files Settings]
- Supported adding new participants via Audio/Video call in conference room. [Initiate Conference]
- Added ability to configure the screensaver network images path as a folder path. [Screensaver]
- Added support for Direct IP calls via IPv6. [Direct IP Call]

Firmware Version 1.0.3.92

• Update document layout.

Firmware Version 1.0.3.75

- Add video display mode explanations for video answer feature. [Make Phone Calls]
- Add phonebook key function explanations for Phonebook option. [Contacts]

Firmware Version 1.0.3.62

 Add disable video call feature option explanations and screenshots for making phone calls. [Make Phone Calls]

Firmware Version 1.0.3.55

• Add authentication type for BroadSoft Directories. [Broadworks XSI Contacts]

Firmware Version 1.0.3.46

• Add "End" key to complete attended transfer during attended transferring. [Attended Transfer]

Firmware Version 1.0.3.37

• Add to consult the third party before attended transferring the call. [Attended Transfer]

Firmware Version 1.0.3.30

- Add call forward option on incoming call page. [Single Incoming Call]
- Add option to dismiss the prompt missed call log on LCD. [Missed Call]
- Add option to hide IP address on Account Widget. [Account Status]
- Add event notify feature. [Action URL]
- Add mute key features While Idle. [Mute]





Firmware Version 1.0.3.22

- Add BS-IM&P. [BS-IM&P]
- Add PNP. [PNP]
- Update HDMI Device. [HDMI Device]

Firmware Version 1.0.3.6

- Add WiFi Static IP and PPPoE Setting. [Add Wi-Fi Networks]
- Add Set Programmable Keys on Unregistered Account. [Set Programmable Keys On Unregistered Account]

Firmware Version 1.0.1.54

- Add BroadWorks Xsi Contacts. [Broadworks XSI Contacts]
- Add BroadWorks Xsi Call History. [Broadworks XSI Call History]
- Add Preview for video calls Contacts. [Single Incoming Call]

Firmware Version 1.0.1.39

• Update screenshots.

Firmware Version 1.0.1.29

• This is the initial version.





WELCOME

Thank you for purchasing Grandstream GXV3240 Enterprise Multimedia Phone for Android[™]. The GXV3240 combines a 6-line IP video phone with the power of a multi-platform video conferencing solution and the convenience of an Android smartphone to offer an all-in-one voice, video, data, and mobility solution. The GXV3240 is a 6-line IP multimedia phone with a 4.3" capacitive touch screen that runs the Android Operating System and therefore offers full access to the hundreds of thousands of Android apps in the Google Play Store - including business productivity apps such as Skype[™], Microsoft Lync[™], Salesforce1[™], and GoToMeeting[™]. The phone features Gigabit ports, HD audio and HD video, a built-in web browser, integrated Wi-Fi for network flexibility, PoE, and a tiltable CMOS camera. The GXV3240 is compatible with the GXP2200 Extension Module, allowing for quick and easy access to up to 160 contacts at the touch of a finger. The GXV3240's integrated Bluetooth allows users to sync the calendar and contact books on their mobile phones. By combining a state-of-the-art IP phone, an advanced video conferencing solution, and the Android operating system, businesses throughout the world can now use one IP Phone for all communication and productivity needs.






PRODUCT OVERVIEW

Feature Highlights

The following table contains the major features of the GXV3240:

Table 1: GXV3240 Features in a Glance

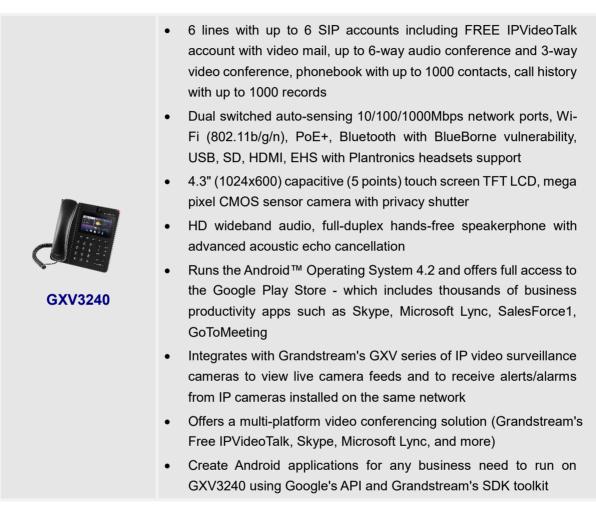





GXV3240 Technical Specifications

The following table resumes all the technical specifications including the protocols / standards supported, voice codecs, telephony features, languages and upgrade/provisioning settings for the GXV3240 phone.

Protocols/Standards	SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, SIMPLE, LLDP-MED, LDAP, TR-069, 802.1x, TLSv1.1, TLSv1.2, SRTP, RFC3605.	
Network Interfaces	Dual switched 10/100/1000 Mbps ports with integrated PoE	
Graphic Display	4.3"(480*272) capacitive (5 points) touch screen TFT LCD	
Camera	Tiltable mega pixel CMOS camera privacy shutter	
Bluetooth	Yes, integrated. Bluetooth 4.0 + EDR, BlueBorne vulnerability.	
Wi-Fi	Yes, integrated. 802.11b/g/n	
Auxiliary Ports	RJ9 headset jack (allowing EHS with Plantronics headsets), 3.5mm stereo headset with microphone, dual USB ports, SD, mini HDMI	
Feature Keys	11 function keys for PHONEBOOK, BACKSPACE, HEADSET, MUTE, HOLD, MESSAGE, TRANSFER, CONFERENCE, SPEAKERPHONE, SEND/REDIAL, VOLUME. 3 dedicated Android keys for HOME, MENU, and BACK	
Voice Codec	Support for G.711 μ /a, G.722 (wide-band), G.726-32, G.729, iLBC, OPUS, inband and out-of-band DTMF (In audio, RFC2833, SIP INFO)	
Video Codec and Capabilities	H.264 BP/MP/HP, H263, video resolution up to 720p HD, frame rate up to 30 fps, bit rate up to 2Mbps, 3-way video conference, anti-flickering, auto focus and auto exposure, PIP (Picture-in-Picture), on-screen-display, camera block, still picture capture/store, video recording, visual voice message indicator	
Telephony Features	Hold, transfer, forward (unconditional/no-answer/busy), call park/pickup, 6-way audio conference, shared-call-appearance (SCA) / bridged-line-appearance (BLA), virtual MPK, downloadable phone book (XML, LDAP), call waiting, call history, boss-secretary virtual button, flexible dial plan, hot desking, personalized music ringtones, server redundancy & fail-over	
Sample Applications	Skype, Google Hangouts, Microsoft Lync, Web browser, GoToMeeting, Facebook, Twitter, YouTube, news, weather, stock, Internet Radio, Pandora, Last.fm, Yahoo Flickr, Photo bucket, alarm clock, Google calendar, mobile phone data import/export via Bluetooth, etc. API/SDK available for advanced custom application development	

Table 2: GXV3240 Technical Specifications





Applications Deployment	Allow various Android operating system 4.2 compliant applications to be developed, downloaded and run in the embedded device with provisioning control		
HD Audio	Yes, both handset and speakerphone support HD (wide-band) audio		
Base Stand	Yes, integrated stand with multiple adjustable angles. Wall mountable		
QoS	Layer 2 QoS (802.1Q, 802.1p) and Layer 3 (ToS, DiffServ, MPLS) QoS		
Security	User and administrator level access control, MD5 and MD5-sess based authentication, 256-bit AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control		
Multi-language	English, German, Italian, French, Spanish, Portuguese, Russian, Croatian, Dutch, Chinese, Korean, Japanese, and more		
Upgrade/ Provisioning	Firmware upgrade via TFTP / HTTP / HTTPS or local HTTP upload, mass provisioning using TR-069 or AES encrypted XML configuration file		
Power and Green Energy Efficiency	Universal power adapter included: Input: 100-240VAC 50-60Hz; Output: 12VDC, 1.5A (18W); Integrated PoE+ (Power-over-Ethernet) 802.3at, Class 4		
Physical	Dimension: 196.5mm (W) x 206.2mm (L) x 85.2mm (H) Unit weight: 0.92kg Package weight: 1.45kg		
Temperature and	Operating: 0°C to 40°C		
Humidity	Storage: -10ºC to 60ºC Humidity: 10% to 90% Non-condensing		
Package Content	GXV3240 phone, handset with cord, base stand, universal power supply, network cable, lens cleaning cloth, quick installation guide, brochure, GPL license		
Compliance	FCC: Part 15 (CFR47) Class B, Part15C, MPE, UL 60950 (Power Adapter) CE: EN55022 Class B, EN55024 Class B, EN61000-3-2, EN61000-3-3, EN60950-1, EN300-328, EN301-489, EN62311, EN62479, RoHS RCM: AS/ACIF S004, AS/NZS CISPR22/24 Class B, AS/NZS 60950, AS/NZS 4268, AS/NZS 4771		





GETTING STARTED

This chapter provides basic installation instructions including the list of the packaging contents and also information for obtaining the best performance with the GXV3240.

Equipment Packaging

Table 3: Equipment Packaging

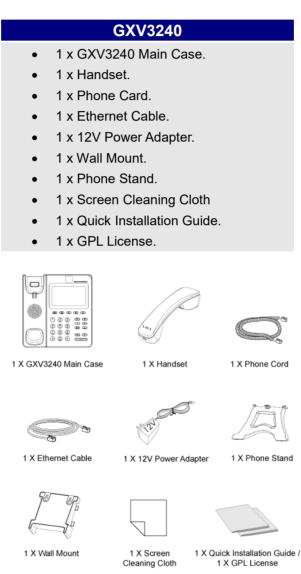


Figure 1: GXV3240 Package Content

Note: Check the package before installation. If you find anything missing, contact your system administrator.





GXV3240 Phone Setup

The GXV3240 can be installed on the desktop using the built-in stand or attached on the wall using the slots for wall mounting.

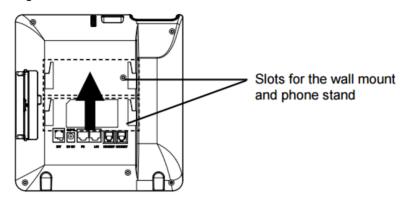


Figure 2: Slots For The Wall Mount And Phone Stand On The GXV3240.


Using the Phone Stand

The GXV3240 has a built-in phone stand. To set up the GXV3240 as your desk phone, follow the steps below:

- 1. Attach the phone stand to the back of the phone where there is a slot for the phone stand. Upper part and bottom part are available for two angles;
- 2. Connect the handset and main phone case with the phone cord;

Using the Slots for Wall Mounting

- 1. Attach the wall mount to the slots on the back of the phone;
- 2. Attach the phone to the wall via the wall mount hole;
- 3. Pull out the tab from the handset cradle (see figure below);
- 4. Rotate the tab and plug it back into the slot with the extension up to hold the handset while the phone is mounted on the wall.









Description of the GXV3240

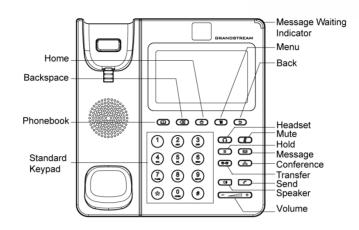


Figure 4: GXV3240 Front View

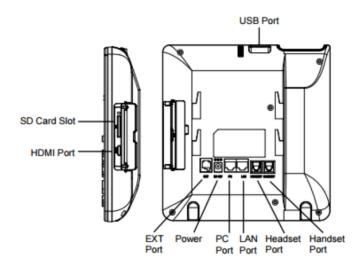


Figure 5: GXV3240 Back View

Table 4: GXV3240 Connectors

USB Port	USB devices can be connected via the USB port. For example, connect a USB flash drive to save captured pictures.
SD Card Slot	Connect SD storage device to the SD Card Slot.
HDMI Port	Connect display device to the HDMI port via HDMI cable.
Headset Port	RJ9 headset connector port.
Handset Port	RJ9 handset connector port.
PC Port	10/100/1000Mbps RJ-45 port connecting to PC.





LAN Port	10/100/1000Mbps RJ-45 port connecting to Ethernet.
Power Jack	12V DC Power connector port.
EXT Port	RJ11 connector port to connect the extension board GXP2200EXT.

Connecting the GXV3240

To setup your GXV3240, please follow the steps below:

- 1. Connect the handset and main phone case with the phone cord;
- 2. Connect the LAN port of the phone to the RJ-45 socket of a hub/switch or a router (LAN side of the router) using the Ethernet cable;
- 3. Connect the 12V DC output plug to the power jack on the phone; plug the power adapter into an electrical outlet. If PoE switch is used in step 2, this step could be skipped;
- 4. The LCD will display booting up or firmware upgrading information. Before continuing, please wait for the main screen display to show up;
- 5. Using the web configuration interface or from the menu of the touch screen, you can further configure network connection using static IP, DHCP and etc.

GXV3240 Extension Module (GXP2200EXT)

The GXV3240 uses GXP2200EXT as the extension module. The extension module is an ideal solution for the busy enterprise environment looking to add the ability to receive and dispatch calls efficiently. Each GXP2200EXT extension module has 20 programmable buttons, LEFT and RIGHT buttons, supporting 40 Multiple Purpose Keys to be configured. GXV3240 supports up to 4 extension modules, adding 160 fully programmable phone extensions to the phone.

GXP2200EXT Board	1
GXP2200EXT Stand	1
RJ11-RJ11 Cable	1
Connector Plate	1
Screws	4
Quick Installation Guide	1

Table 5: GXP2200EXT Packaging

∧ Note:

The GXP2200EXT is an additional accessory for the GXV3240. Therefore, the GXP2200EXT (including extension module accessories for installation) is not included in the GXV3240 box.





To set up the GXP2200EXT with the GXV3240, please follow the steps below:

- 1. On the back of the GXV3240 and the GXP2200EXT, there are slots for connector plate. Attach the connector plate between the slots for GXV3240 and the GXP2200EXT;
- 2. Apply the screws provided and securely tighten them in (See Figure 6: GXV3240 Back View with GXP2200EXT).
- 3. Connect the GXP2200EXT to the GXV3240 via the EXT port using the RJ11-RJ11 cable provided with the GXP2200EXT;
- 4. Install the phone stand on the GXV3240 and the GXP2200EXT;
- 5. Power up the GXV3240. The GXP2200EXT will show the booting up screen with version information and connecting status;
- 6. After successfully booting up, the GXP2200EXT will stay in idle. Press and hold the LEFT button for about 3 seconds to check the version information and status.

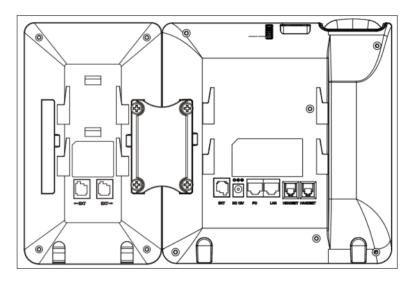


Figure 6: GXV3240 Back View with GXP2200EXT

The GXP2200EXT can be configured via the web GUI of the GXV3240 connected. After successfully configured, press LEFT or RIGHT button on the GXP2200EXT and users could browse all the MPK's status in different pages.

For more information on installing, connecting and configuring the GXP2200EXT with GXV3240, please refer to the GXP2200EXT user manual in <u>http://www.grandstream.com/support</u>.





GETTING TO KNOW GXV3240

Use the Touchscreen

When the phone boots up in HOME screen, the LCD will display as below. A registered account is shown in the following figure and users might need register their own account to have the account status displayed.

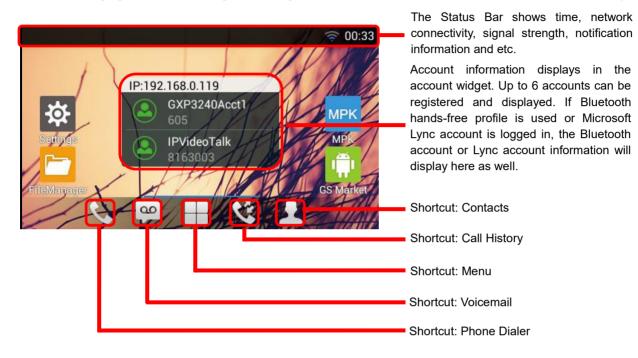


Figure 7: GXV3240 Default Home Screen

Tap on the onscreen Menu icon , the settings and applications menu will be brought up as shown below.

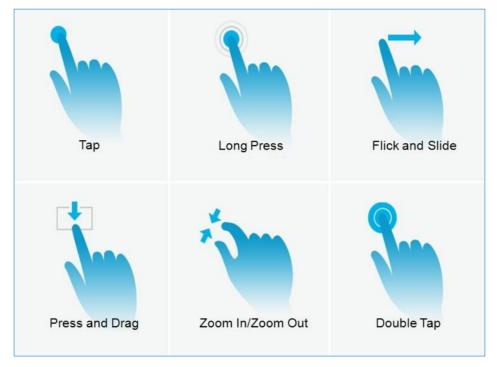


Figure 8: GXV3240 Onscreen Menu

To fully manipulate the GXV3240 capacitive touch screen, use your fingers to operate the following on the







GXV3240 icons, buttons, menu items, onscreen keyboard and etc.

Figure 9: GXV3240 Finger Gestures on the Touch Screen

• Tap

Slightly touch the screen with fingertip to initiate menu, options or applications. For example, to select items on the screen (e.g., setting options, apps and etc.); to press onscreen buttons (e.g., "End" or "Options" softkey during the call); to type letters and symbols using the onscreen keyboard.

Long Press

Touch the screen with fingertip and press for about 2 seconds without lifting your finger from the screen till an action occurs. For example, long press on a picture to bring up selection option.

• Flick and Slide

Touch the screen with fingertip and slide over the screen. For example, user could slide up to scroll up the page, slide down to open dropdown menu, slide left or slide right to delete an item from the list. If your finger stays on the screen for too long, the item may be selected and sliding won't occur.

• Press and Drag

Touch and press the item, then move it by dragging it up, down, left or right, without lifting your finger from the screen.

• Zoom in/Zoom Out

Place two fingers on the screen, then pinch them together (zoom out) or spread them apart (zoom in).





• Double Tap

Quickly touch the screen twice with fingertip to switch between default display and zoomed-in display. This is usually used when viewing photos or web pages.

Use the Desktop

Desktop Menu

When the GXV3240 is on idle screen, press the MENU key () to bring up phone's menu. Users can access the following in the desktop menu:

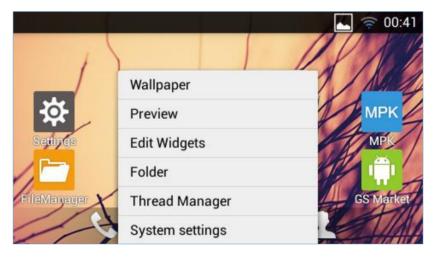


Figure 10: GXV3240 Desktop Menu

• Wallpaper

Select wallpaper from Gallery, Wallpapers or Live Wallpapers.

Preview

Add, delete or edit desktop.

• Edit Widget

Add widgets to the desktop by dragging the widget from the bottom menu to the desktop.

• Folder

Add folder on the desktop and users can place desktop shortcuts into the folder.

• Thread Manager

Manage running applications on the GXV3240. For more details, please refer to section [*Manage Running Applications*].

• System settings

Access phone's settings such as "Personalized Account", "Wireless & Network", "Sound", "Display", "Storage", "Application" and etc.





Add Application Shortcut to Desktop

The shortcut of the applications installed on the GXV3240 can be added to the desktop for users' easy access. To add shortcut:

- 1. Tap the on-screen Menu icon \blacksquare to access the applications first.
- 2. Select and press the application icon for about 2 seconds. The screen will show "Move to Desktop" on the bottom.
- 3. Drag the icon to the bottom of the screen. Phone's idle screen will immediately show up for you to place the shortcut.



Figure 11: Add Application Shortcut to the Desktop

Add Widget to Desktop

The GXV3240 provides widgets like account bar (with different number of accounts supported), clock, calendar, contacts, Email, MPK, system setting shortcut, weather and etc. Users could conveniently add those widgets to the desktop as preferred. To add a widget:

- 1. Press the Menu key 🗊 and select "Edit Widgets".
- 2. Different widgets will be displayed on the bottom of the screen.
- 3. Select and drag the widget to the desired spot to be placed on the desktop. Please make sure there is enough space on the desktop. Otherwise, the widget won't be added.





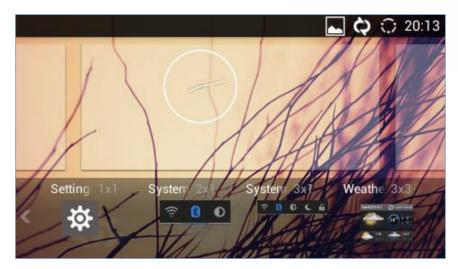


Figure 12: Add Widget to the Desktop

Manage Desktop Items

On the GXV3240 desktop, users could tap on the desktop items to manage shortcuts and widgets. The following operations can be done:

• Tap on the shortcut icon to open the application.

For example, tap on "FileManager" icon 🖵 to ac

to access file manager application.

• Tap on the widget to open and edit it.

For example, tap on the digital clock on the desktop. The clock settings will be brought up for users to set up timer, stop watch or alarm.

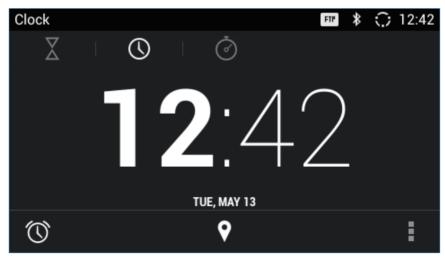


Figure 13: Open Clock Widget

 Certain widgets such as Calendar, Clock and Bookmark can be resized on the desktop. To resize a widget, touch and press the widget for about 2 seconds. Then lift your finger from the screen. This will bring up the blue frame as shown in [*Figure 14: Resize Digital Clock Widget*]. Touch and drag the border of the frame to adjust the size.







Figure 14: Resize Digital Clock Widget

• Move the shortcut/widget

To move a shortcut/widget to a different spot on the desktop or to a different idle screen, touch and press the item for about 2 seconds until a recycle bin icon shows up on the bottom of the screen. Drag the item up/down/left/right to the destination spot on the screen. Lift your finger once done.



Figure 15: Move Clock Widget

Remove the shortcut/widget

To remove an item from the desktop, touch and press the item for about 2 seconds. A recycle bin icon will show up on the bottom of the screen. Drag the item to the recycle bin to remove it.







Figure 16: Remove Clock Widget

⚠ _{Note:}

Removing operation only removes the shortcut of the application on the screen. The application itself will not be uninstalled.

Set Wallpapers

On the GXV3240 desktop, touch and press on an empty spot for about 3 seconds to bring up wallpaper settings. Or users could press menu key (and select "Wallpaper" to set up the wallpaper for the desktop. Users could select wallpaper from different categories:

Gallery

Open Gallery application and tap on the picture to preview. Touch and drag the blue frame border to select the area of the picture. Then tap on "OK" to set the selected area of the picture as wallpaper.

• Live Wallpapers

Open a list of sample animated wallpapers built-in with the GXV3240. Select the live wallpaper to preview and then tap on "Set wallpaper".

• Wallpapers

Open a list of sample wallpapers built-in with the GXV3240. Select the picture to preview and then tap on "Set wallpaper".







Figure 17: GXV3240 Choose Wallpaper

Manage Running Applications

On the GXV3240 desktop, press the Home button for about 2 seconds or select "Thread Manager" after pressing Menu button .

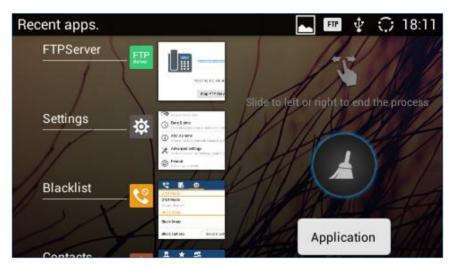


Figure 18: GXV3240 Recent Applications

Users could use the thread manager to do the following:

- Slide the running thread to the left or right to stop the application.
- Tap on icon 🖉 to delete all running threads.
- Tap on "Application" softkey to access application menu for advanced management options.





Idle Screen

Switch Idle Screens

The GXV3240 supports multiple idle screens by sliding the screen horizontally. On the GXV3240 screen, slightly touch an empty area and slide to the left or right using your finger to switch between different idle screens.

Set Up Idle Screen

Set home screen

Follow the steps below to set up the HOME screen.

- 1. GXV3240 is up and running on idle screen.
- 2. Press the MENU button (and tap on "**Preview**" option. This will zoom out all the screens as shown in *[Figure 19: Set up Home Idle Screen]*.
- 3. The screen with 🙃 displayed is the HOME screen. Others are shown with icon 👘. Tap on the

icon 👘 to select the corresponding screen as the new HOME screen.

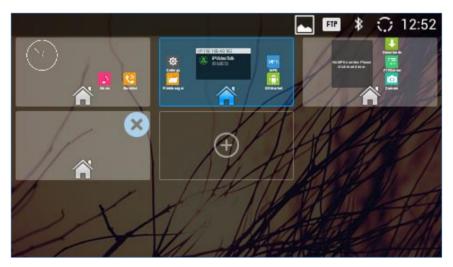


Figure 19: Set up Home Idle Screen

Add/Delete idle screen

As shown in *[Figure 19: Set up Home Idle Screen]*, the screen with the blue frame highlighted is the current idle screen on the LCD. Users could add or delete idle screen.

Add idle screen.

Tap on $^{\oplus}$ to add a new idle screen. Users could add up to 9 idle screens.

Delete idle screen.

Tap on \bigotimes on the top right of the idle screen to delete the idle screen.





Please make sure the apps, shortcuts or widgets on the idle screen are removed first. Otherwise,

the *icon* won't show for the idle screen.



Figure 20: Delete Idle Screen

Use the Status Bar

The status bar on the top of the GXV3240 screen provides visual notifications for the system settings and status, as well as quick access for important system settings. To access it, on the GXV3240 idle screen, slowly slide down from the top to the bottom of the screen as the following figure shows.



Figure 21: GXV3240 Top Status Bar

The running process will show up in the list. For example, the following figures indicate the Google Play app is being downloaded at the moment.





			Ŧ	*	🛜 01:05
03/	(15/2014 SATURDAY				
Ŧ	Google Play				
	Notification	5	System S	etting	S
		=			

Figure 22: GXV3240 Top Status Bar – Notification

- Tap on the notification message to view the details.
- Slide the notification message to left side to remove it.

Notifications in Status Bar

The following table describes the icons used on the status bar for notification purpose.

Table 6: GXV	3240 Status	Bar Notification	Icons

\odot	Network connected via Ethernet cable.
\odot	Trying to connect to the network via Ethernet cable.
(;*	Network disconnected via Ethernet cable.
٩,	Handset is off-hook.
\$	Missed call.
4	One line is active.
∢ »	Speaker is being used.
G	RJ9 headset is being used.
റീ	RJ9 headset mode is on. All the calls will be using RJ9 headset by default.





0 0	3.5mm earphone is connected.
(0(0 ⁴⁰⁾	3.5mm earphone is being used for calls.
(0(0) € J	The system has detected the 3.5mm earphone line order.
((i•	Wi-Fi is enabled and connected. Signal level: 1.
((•	Wi-Fi is enabled and connected. Signal level: 2.
(î•	Wi-Fi is enabled and connected. Signal level: 3.
(î•	Wi-Fi is enabled and connected. Signal level: 4.
	Onscreen keyboard is activated.
*	Bluetooth is enabled and connected.
*	Bluetooth is enabled but not connected.
0	Bluetooth headset is connected.
_ D [%]	Bluetooth headset is being used for calls.
÷	Downloading files via Bluetooth.
\heartsuit	Alarm is set up and enabled.
20	DND is enabled.
峯	Mute is enabled.
₹×	Silent mode is enabled. When it's on, the incoming call/message won't produce ring tone/notification tone from phone's speaker.
	SD Card is inserted.
B	SD Card space full.





Ŷ	USB flash drive is inserted.
Ŧ	Downloading files via Internet connection.
Â	Updating applications.
7	Calendar has event scheduled.
9	Unread voicemail to be retrieved.
\times	Unread Email to be retrieved.
FTP	FTP server is running.
ও	Incoming call from blacklist contact.
<u>R</u>	Camera is disabled.
e.	Contact storage is full.
HDMI	HDMI cable is connected to display device.
÷	New SMS message to be retrieved.
R	SMS Message sent failure.
Щ́С	The phone is powered up using PoE.
\$	Call forward is set up for SIP account 1.
	Call forward is set up for SIP account 2.
€ 3	Call forward is set up for SIP account 3.
<₽4	Call forward is set up for SIP account 4.
€ ;	Call forward is set up for SIP account 5.






ᢗᢏ₀	Call forward is set up for SIP account 6.				
Ð	More notifications on the status bar.				
4	USB mouse is connected.				
►	Music is playing using music app.				
Ēz	PPPoE is connected.				
	PPPoE is not connected.				
A	Warning message.				

System Settings in Status Bar

Slide down the top status bar and select System Settings. Users will see the following settings.

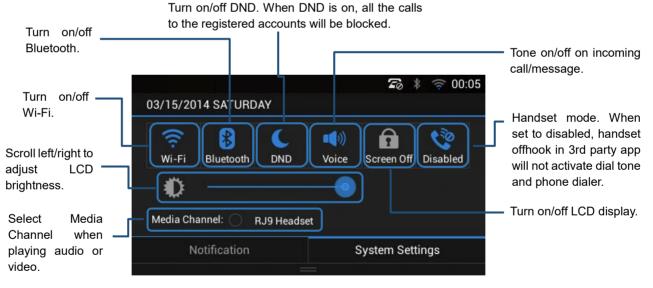



▲ Notes:


Handset Mode is for audio path and GXV3240 dialer control when running 3rd party app that uses media path. Currently there are three options supported:

• **Enabled:** Default mode. When handset is lifted, audio will come through handset and the GXV3240 default dial screen will show.






- **Disabled:** In this mode, when running the 3rd party app, if handset is lifted, the audio path will switch to handset but GXV3240 default dial screen won't show (users won't hear dial tone either). Onhook the handset, the audio path will be switched to speaker. Under this mode, even the GXV3240 is not using the 3rd party application, picking up the handset will not activate the GXV3240 dialer. (Users can still use Speaker button to activate GXV3240 dialer under this mode.)
- Auto: In this mode, the GXV3240 will automatically detect if the audio path is used by 3rd party app first. If so, it will use the handset mode "Disabled". Otherwise, keep it in "Enabled" mode. Please note that running the 3rd party app doesn't necessarily mean the audio path is used by the 3rd party app. If the audio path is not occupied by the 3rd party app, the GXV3240 will still use the handset mode "Enabled".

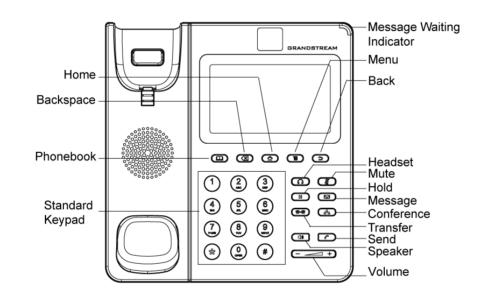

Use the GXV3240 Keypad

Figure 24: GXV3240 Keyboard

Table 7: GXV3240 Keys

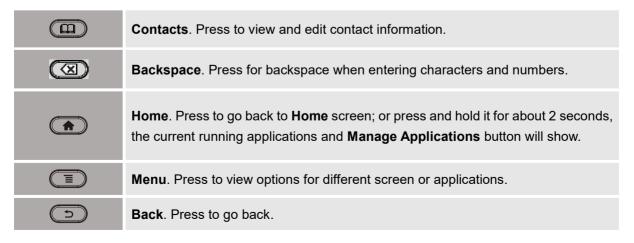





n	Headset. Press to switch to headset mode.
Ť	Mute. Press to mute or unmute the call.
	Hold. Press to put call on hold or resume the call.
	Message. Press to view voicemail messages.
2-2	Transfer. Press to transfer call.
	Conference. Press to conference call.
	Speaker.
	Send/Redial.
(- <u>+</u>)	Volume.

Keypad Shortcut Functions

The GXV3240 supports keys shortcuts for certain special system functions.

Screenshot

Press and hold the Menu button (I) for about 3 seconds to capture screenshot. The screenshot can be accessed via FileManager->Internal Storage->Pictures->Screenshots. The screenshot picture size is 480x272 pixels.

Firmware upgrade via SD card

Insert the SD card to the GXV3240. The SD card should have the valid firmware bin file in it. Power cycle the phone and the MWI LED will light up. Wait until the MWI LED lights off. Then immediately press both "*" and "3" keys at the same time for about 8 seconds. Release the keys once the MWI LED lights up again. The phone will start the upgrading process.

Note: Before upgrading, please ensure your device is using a 12V power adapter.

Use the Onscreen Keyboard

The GXV3240 onscreen keyboard can be activated by tapping on an input field.

English Keyboard

This is the default keyboard on GXV3240. Touch and press the **example** key on the keyboard for about 2

seconds and it will switch to ¹¹, which can be used to access input options to switch input methods.





q	w	е	r	t	у	u	i	0	р	×
а	s	d	f	g	h	j	k			Q,
ۍ	z	x	с	v	b	n	m		•	ۍ
?123	박	/ @		i	English (US)					: *

Figure 25: GXV3240 Onscreen Keyboard - English Keyboard

To switch input between lowercase and uppercase, tap on (lowercase) or (uppercase).

Q	W	Е	R	т	Y	U	I	0	Р	
A	S	D	F	G	н	IJ		(Q,
	Z	Х	С	V	В	N	М	,	•	? •
?123	랴	/		E	inglish (US)		, '		· : *

Figure 26: GXV3240 Onscreen Keyboard - Lowercase and Uppercase

Number and symbols

To input number and symbols, tap **?123** on the default keyboard to switch to number/symbols. Tap on



ABC to switch back. Tap on to access more symbols.





Tap on **Tap** to access more symbols.

▲ Note:

- To configure keyboard and input options, users could go to Settings -> Language & Keyboard -> Keyboard & Input Methods.
- Users could touch and press the key on the keyboard for about 2 seconds to input the alternative • character. For example, touch and press the "+" key for about 2 seconds can get the selection "±".





Use the Message Waiting Indicator

The GXV3240 message waiting indicator LED is on the upper right corner of the device. It could notify the users with different messages and status of the phone. Please refer to the status description below. **The priority for the LED indicator is from high to low in the following table**.

Color	LED Status	Description
	Fast Flashing	Incoming call
-	Solid	Calling, Talking, Conferencing, Screensaver on when the LCD is off
	Slow Flashing	A call is on hold
	Flashing	Missed call (s), New voicemail (s), New SIP Message (s)
	Solid	High memory usage, Maximum contact storage
	Fast Flashing	Upgrading
OFF	OFF	Normal

Table 8: GXV3240 MWI LED Status





MAKE PHONE CALLS

Register SIP Accounts

The GXV3240 supports up to 6 independent SIP accounts, including a pre-configured IPVideoTalk account registered on account 6. Users can make video calls and send messages to other IPVideoTalk accounts registered on another GXV32xx/GXV31xx. Each account can have separate SIP servers, usernames and NAT configurations.

Account Status

On the idle screen, the account widget shows account name, number and registration status.

- The following figure shows the accounts are successfully registered (account icon is green).
- If the account icon is grey, it's still trying to register or unable to register.
- If the users have enabled Shared Call Appearance on the registered account, the account icon will be



• Microsoft Lync account and Bluetooth handsfree profile account will be displayed here too (if any).



Figure 28: GXV3240 Account Widget

Note: Users may go to web UI→Maintenance→Network Settings, uncheck "Show IP Address On Account Widget" to hide the IP address of the phone.

Configure SIP Account

To register SIP account, users could directly configure from phone's LCD menu \rightarrow Settings \rightarrow Advanced Settings \rightarrow Account. Or users could log in the GXV3240 web GUI \rightarrow Account page to fill in the necessary registration information, i.e., Account active, Account name, SIP Server, SIP User ID, SIP Authentication ID, SIP Authentication Password, etc.

Once the correct information is entered and saved, the account registration status will show on the main screen.

∧ Note:

For web GUI login and configuration information, please refer to GXV3240 Administration Guide.





Once the account is successfully registered, users could use one of the following ways to bring up dial screen to start making calls.

- Take the handset off hook.
- Select an account from the account widget in the idle screen.
- On the bottom of the idle screen, tap on ^S icon to open dial screen.
- Tap on 🔽 to open "Phone" application which will bring up dial screen.
- Press the Speaker button (to bring up dial screen and the audio channel will be speaker.

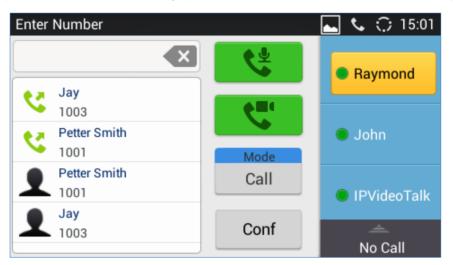


Figure 29: GXV3240 Dial Screen

If **Disable Video Call Feature** option is enabled, the **Video Call** option on GXV3240 dial screen will be hidden.

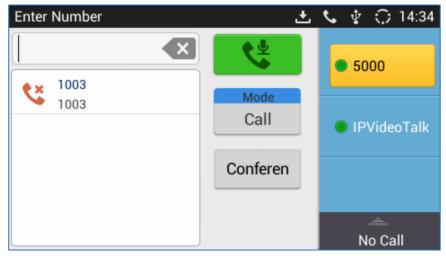


Figure 30: Disable Video Call Feature on Dial Screen





Set Programmable Keys on Unregistered Account

GXV3240 allows end users to setup shortcut keys on the phone app. The shortcut keys only allow to take place the unregistered accounts. From example, if the phone enables the Account 1 and registers it with a SIP server, end users have to place the shortcut keys on Account 2 to 6.

From Web UI, users can set the shortcut keys under the setting of Account $X \rightarrow Call$ Settings \rightarrow Programmable keys. After setting, the programmable keys can be showed on the account bar in the phone app. The following screenshot is a speed dial key which takes place the Account 2 position. End user can tap the key to user Account 1 to dial the number 1001.

Enter Number		土 🗘 18:07
	<	• 1025
e 🗧 🔶 🖉 🔶 🔶 🔶		
> 1001	6	1001
● → 0004		1001
> 0004	Mode	Speed Dial
🌪 🛪 1010	Call	
> 1010		
♦ 7 0002		
0002	Conf	<u> </u>
		No Call

Figure 31: GXV3240 Programmable Keys

Dial a Number Directly

- 1. Use the methods mentioned above to open dial screen [Figure 29: GXV3240 Dial Screen].
- 2. Select the account to dial out on the left panel of the dial screen. The selected account will be highlighted in grey background.
- 3. Enter the digits to be dialed out using the keypad. If the digit matches call history, a dropdown list of numbers will be displayed for users to select.
- 4. Tap on (audio call only) or (video call), or (audio call only) to send the number. If no key is pressed, the call will be automatically dialed out after 4 seconds timeout.

▲ Notes:

• By default, the "No Key Entry Timeout" is 4 seconds, meaning if no key is pressed after starting entering number, the call will be automatically sent out after the timeout. The timeout interval can be configured under web GUI→Account→Call Settings.





- GXV3240 allows users to press # key as SEND key. This behavior can be disabled via option "Use # as Dial Key" under web GUI→Account→Call Settings, when this option is disabled, the pound "#" key can be included as part of the dialed number or it will be used as redial key when the input area has no number (please make sure the dial plan is properly configured to allow dialing # out).
- When the user enters the digit on the dial screen, if there is digit matching call history, or contacts name/number, the drop-down list will show the numbers. For example, if "John" is saved in the contacts, entering 5 (JKL) 6 (MNO) 4 (GHI) 6 (MNO) will show call log with 5646 as the first four digits, as well as John's number. Users could then directly select one of them from the list, instead of entering all the digits.

Redial

Users can dial out the last dialed number if there is dialed call log, using the same SIP account making the call last time. There are two ways to redial the last dialed number.

- When the phone is idle or off hook, press SEND
- When the phone is on hook, press SEND *button* or *#* button (*#* key is used as dial key).

Dial a Number via Contacts

Follow the steps below to dial a number via Contacts.

- 1. Access Contacts by tapping on $\stackrel{\checkmark}{=}$ icon on the bottom of the idle screen, or selecting $\stackrel{\textcircled{}}{=}$ from phone's menu.
- 2. Navigate in the contacts entries by sliding up/down on the screen.
- 3. Tap on the dial icon for the contact \bigcirc .

Contacts	16:24 🗘 🗘
👤 ★ 🔍	_ , < ≡
A	3 contacts #
Amy 1006	🔇 🤤 🖁
E	i
Emily 1004	C 🗐
R	÷
Raymond 1007	🔇 📮 🖞

Figure 32: GXV3240 View Contacts





Dial a Number via Call History

1. Access Call History by tapping on

icon on the bottom of the idle screen, or selecting



the phone Menu.

- 2. The LCD will display all call history types: "All", "Missed", "Outgoing" and "Incoming" calls.
- 3. Navigate in the call history list by selecting the call history category and sliding up/down on the screen.
- 4. Tap on the entry to dial out.

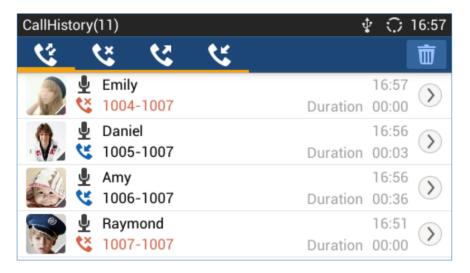


Figure 33: GXV3240 Call History

Direct IP Call

Direct IP Call allows two phones to talk to each other in an ad-hoc fashion without a SIP proxy. VoIP calls can be made between phones if:

- Both phones have public IP addresses, Or
- Both phones are on the same LAN/VPN using private or public IP addresses, Or
- Both phones can be connected through a router using public or private IP addresses (with necessary port forwarding or DMZ).

The GXV3240 support both IPv4 and IPv6, below description on how to make IP calls via both IPv4 and IPv6.

IP call via IPv4:

To make a direct IP call, please follow the steps below:

- 1. Off hook the phone or select account in the idle screen to bring up dial screen on GXV3240.
- 2. Under "Mode" button in the call screen, tap on it and select the mode as "IP Call".





3. Input the target IP address. For example, if the target IP address is 192.168.0.116 and the port is 5062 (i.e., 192.168.0.116:5062), input the following:

192*168*0*116#5062. The * key represents the dot (.) and the # key represents the colon (:).

4. Press "SEND" key or tap on (audio call only) / (video call) button to dial out.



Figure 34: Direct IP Call

IP call via IPv6:

To make a direct IP call via IPv6, please follow the steps below:

- 1. On the phone web GUI under "Advanced Settings > Call Features" set **Display Soft Keyboard** to **Yes.** Once activated, users could click on the dialing box the soft keyboard will appear to enter the IPv6.
- 2. Off hook the phone or select account in the idle screen to bring up dial screen on GXV3240.
- 3. Tap on "Mode" in the call screen, and set it to "IP Call".
- 4. Input the target IPv6 address. For example, if the target IPv6 address is fd2f:2f94:8a::1 and the port is 5062, input the following: **[fd2f:2f94:8a::1]:5062**
- 5. Press "SEND" key or tap on (audio call only) / (video call) button to dial out.

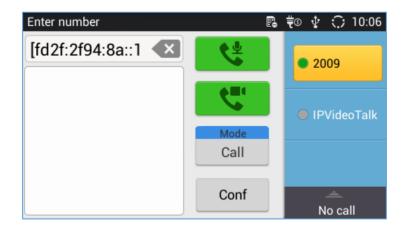


Figure 35: Direct IP Call via IPv6





⚠ _{Notes:}

- The # will represent colon ":" in direct IPv4 call rather than SEND key as in normal phone call.
- Port number is not mandatory when making direct IP call.
- Users need to activate the first account on the GXV3240 to complete direct IP call.
- If you have a SIP server configured, direct IP call still works. If the devices are behind NAT, users might need configure NAT Traversal before using direct IP call. If you are using STUN, direct IP call will also use STUN.
- The phone needs to configure option "Use Random Ports" to "No" to accept direct IP calls.
- In GXV3240 Contacts or MPK, if the phone number or MPK is an IP (both IPv4 and IPv6) address, direct IP call can be made by dialing this contact or pressing the MPK button.

Answer a Call

Single Incoming Call

• When the phone is in idle and there is an incoming audio call, the phone will show the call screen as below. Tap on "Answer" softkey to answer the call via speaker, or pick up the handset to answer the call.

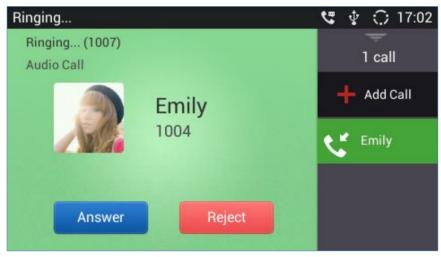


Figure 36: Single Incoming Call - Audio

 When the phone is in idle and there is an incoming video call, the phone will show the call screen as below. To answer the call with audio only, tap on "Audio Answer" to answer the call via speaker, or pick up the handset. To answer the call with both audio and video, tap on "Video Answer". During video call, the audio will switch to handset if picking up the handset.

Note: Users could select the Video Display Mode on phone's Web UI→Advanced Settings→Video Settings. Set the video display mode to "Original proportion", "Equal proportional cutting" or





"Proportional add black edge". If set to "Original proportion", the phone displays video in its original proportion. If the video display proportion is different from the one of the phone, the phone will stretch or compress video to display it. If set to "Equal proportional cutting", the phone will cut video to meet its own display proportion. If set to "Proportional add black edge", the phone will display video in its original proportion, if still exists spare space, the phone will add black edge on it.

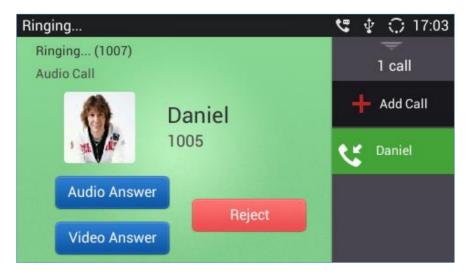


Figure 37: Single Incoming Call - Video

 If the phone set the "Preview" feature for the incoming call from Web UI, the phone will display one more key "Preview" when there is an incoming video call. End users will preview the remote end without answering the video call. After previewing, end user can tap "Audio Answer" key to answer the audio call, "Video Answer" key to answer the video call, or "Reject" key to reject it. This feature should be supported by the SIP server. Please contact service provider for more information.



Figure 38: Single Incoming Call – Preview-1





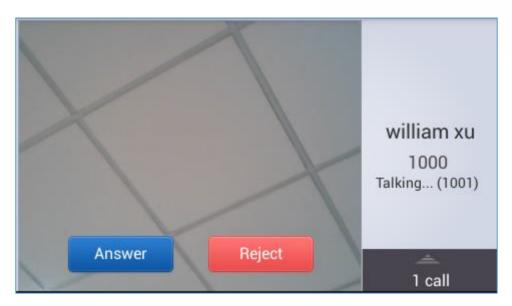


Figure 39: Single Incoming Call – Preview-2

Note:

Adding new calls during the preview of incoming Video call is not possible. When pressing the "new call" button, a message will be prompted telling the user that it is inaccessible. See the following screenshot:

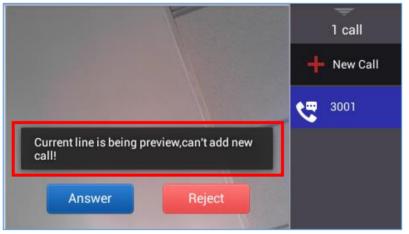


Figure 40: Prompt displayed when pressing new call during preview

• If the phone set to "Call Forward", the phone system will pop up the "Transfer" key on the LCD screen when there is an incoming call, and users could tap on it to show up the transferring page without answering the incoming call, then, users could transfer this incoming call to others.





Ringing		😍 📣 🗘 15:34
Ringing (1002) Video Call		پ 1 call
10	00	🕂 Add Call
100		1000
Audio Answer	Transfer	
Video Answer	Reject	

Figure 41: Single Incoming Call - Call Forward-1



Figure 42: Single Incoming Call - Call Forward-2

Multiple Calls/Call Waiting

1. When there is another incoming call during active call, users will hear a call waiting tone, with the LCD displaying the caller name and ID for the incoming call in the right panel, the account bar in green is the ringing line from "Ben"; the account bar in black is the current active call with "John". "3165" is the callee account name.





Ringing		5	FTP	🔹 🗘 16:09
Ringing (3165) Audio Call				2 calls
	Ben		+	Add Call
	3536		હ	3165 Ben
			ও	3165 john
Answer	Reject			

Figure 43: Call Waiting

- 2. Similar to single incoming call, if the incoming call is video call, users can choose "Audio Answer" or "Video Answer" to answer the call.
- 3. Once the new call is answered, the current active call will be placed on hold. If the new call is rejected by tapping on "Reject" softkey, the current active call will not be interrupted.

Call Progress Status

During an active call, if Home Button is pressed, the phone will go back to the home screen and the call-inprogress status will be shown in the GXV3240 status bar, once clicking the bar it will go back to call screen.



Figure 44: Call Progress Status Bar

Call Hold

During the active call, press HOLD button it to put the call on hold. The LCD screen will show as below. To resume the call, press HOLD button again.





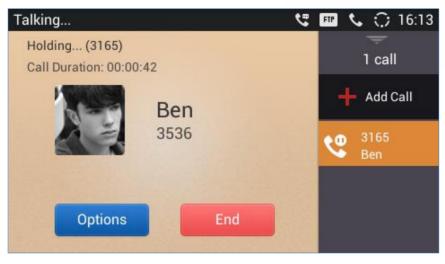


Figure 45: Call On Hold

Call Recording

- During the call, users could record the conversation to the phone by tapping on "Options"→"Start Recording" on the call screen.
- 2. Once done, tap on "Options" \rightarrow "Stop Recording" or hang up the call.
- 3. The recording files can be retrieved from the GXV3240 application "Recorder \rightarrow "Call" category.

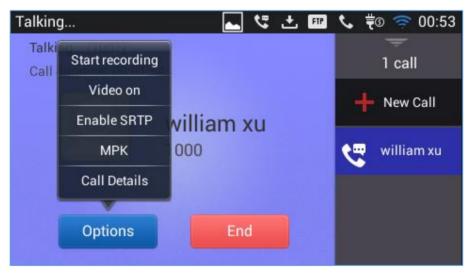


Figure 46: GXV3240 Call Recording

Notes: Users can configure the recording mode via the Web $GUI \rightarrow Advanced$ Settings $\rightarrow Call$ features $\rightarrow Record$ Mode.

Three modes are available:

• **Record Locally**: The phone will use the local tape recorder for call recording, and the audio file will be saved in accordance with the tape recorder setup.





- Record on PortaOne: The phone will send SIP INFO message with "record" header to the server.
- **Record on UCM**: The phone will send the recording feature code to the UCM server to request for recording and the recording function will be executed by the UCM.

Users can configure the phone to Auto-record all the calls established via the Web GUI→Advanced Settings→Call features→ Enable Auto Record When Call Established.

Mute

During an active call, press the Mute button 1 to mute the call. The mute icon $\overset{\checkmark}{2}$ will be displayed in the status bar on the top of the screen. Press the Mute button 1 again to unmute the call.

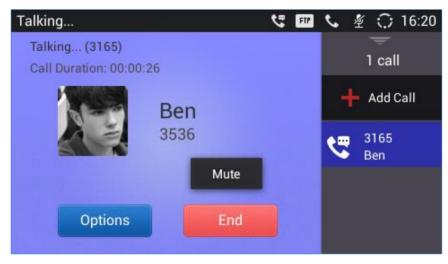


Figure 47: GXV3240 Call Mute

Note: Mute key could be set to "DND", "Idle Mute", and "Permanent Mute" mode while the phone is at idle state.

Turn on Video during Audio Call

Users could establish audio call first and then turn on video or accept video request during the call if the other party supports video call as well.

• Turn on video during audio call

During an active audio call, on the call screen, tap on "Options" and select "Video On", a video request will be sent to the other party.





Talking	l	💽 🗸	±, FTP	くせ	💿 夸 00:53
Talki Call	Start recording) 1 call
	Video on			1	New Call
	Enable SRTP	villiam xu		T New Call	
	МРК	000		2	william xu
	Call Details				
	Options	End			

Figure 48: Turn on Video during Audio Call

Accept video request

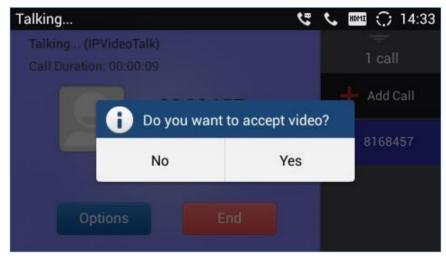


Figure 49: Accept Video during Audio Call

If the GXV3240 receives video request during the audio call, a message "Do you want to accept video?" will be prompted. Select "Yes" to establish video during the call. If the **Disable Video Call Feature** is enabled on GXV3240, the "Video On" option on GXV3240 will be hidden during the audio call. However, if the GXV3240 receives video request during the audio call, users could tap to accept the video request.





Call Details during Call

During an active audio/video call, on the call screen, tap on "Options" and select "Call Details".

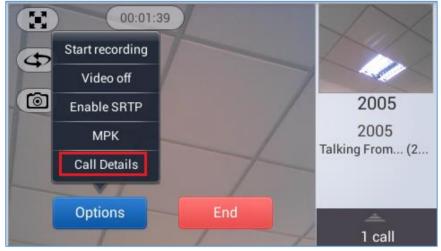


Figure 50: Select Call Details During Video Call

The call details for RTCP info report will be displayed as shown below.

Call Details: 2005			
	Send: 2322Kbps	Receive : 2392Kbps	
	Packet loss rate : 0.0%	Packet loss rate : 0.0%	
	Bit rate: 2259Kbps	Bit rate : 2327Kbps	
Video	Frame rate : 15fps	Frame rate : 14fps005	
	Codec : H264/BP	Codec : H264/BP From (2)	
	Resolution : 1280x720	Resolution : 1280x720	
	Packet loss rate : 0.0%	Packet loss rate : 0.0%	
Audio	Bit rate : 63Kbps	Bit rate : 65Kbps	
	Codec : PCMU	Codec : PCMU	

Figure 51: Call Details

DTMF During Call

During an Audio/Video call, the user has the ability to show DTMF buttons and each one of them can perform a different action. This feature can be configured by following below steps:

- 1. Go to GXV3240 Web GUI→ Account X→ Call Settings→Programmable Keys
- 2. Set the Key mode of the programmable key as Dial DTMF and specify its name.
- 3. In "DTMF Content" field, set UserID for the corresponding MPK
- 4. Choose the wanted "Dial DTMF Condition".





5. Repeat the same steps for the five other accounts in order to get more DTMF Buttons displayed during the call. See the following figure.



Figure 52: DTMF During Call

The DTMF Buttons are displayed in a space where the user can see only three of them and he can easily scroll up and down to display the others.

Switch Audio Channel during Call

speaker; or slide down the "System Settings" menu on talk screen, and press ¹⁰ icon to switch to Bluetooth headset.

- If Bluetooth headset is connected, the audio will be automatically switched to Bluetooth headset once the call is established.
- The status bar on the top or the screen shows the current audio channel being used during the call. If pressing the corresponding key for the currently used audio channel, the call will be hang up.





Talking				5 1	• 🗇 14:4	13
05/27/20	14 TUESDAY	(
(i:	Bluetooth		الا Voice	Screen Off	Enabled	
٢			-0			
Media Cha The phone	annel: e is busy now.					
Ν	otification		System Settings			

Figure 53: Switch Audio Channel during Call 1

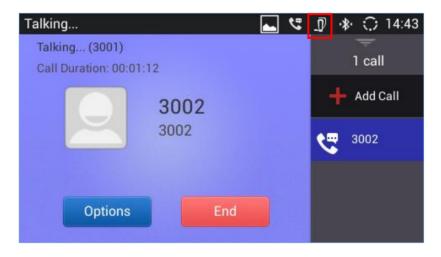


Figure 54: Switch Audio Channel during Call 2

Call Transfer

A call can be transferred to another party during the call. The GXV3240 supports blind transfer and attended transfer.

Blind Transfer

- 1. During the active call, press TRANSFER button **(2-2)** to bring up the transfer screen;
- 2. Select transfer mode as "Blind" by tapping on the highlight button in the figure below. The default transfer mode is "Blind";
- 3. Enter the transfer target number and then press the "Send" soft key on the right;
- 4. The call will be transferred and GXV3240 will hang up the call.





Talking	😋 🎫 🔺>	🗘 16:28
Blind 🔺		Send
Select an active call as the transfer target		

Figure 55: Blind Transfer

▲ Note:

- If wrong digits are entered, tap on *in the digit one by one;*
- If users would like to cancel the transfer, press 🗇 button to go back to the previous talking screen.
- The GXV32XX can recover the call with transferred party if the third party does not answer blind transfer.

Attended Transfer

GXV3240 supports attended transfer:

- 1. During the active call, press TRANSFER button 2 to bring up the transfer screen;
- 2. Select transfer mode as "Attended" by tapping on the mode selection bar (see figure below);



Figure 56: Attended Transfer

- 3. Enter the transfer target number, and then press the "Send" soft key on the right.
- 4. Before transfer target answers the call, GXV3240 hears the ringback tone, and the touch screen





prompts shown as below. Users could tap on "Cancel" to cancel the transfer, tap on "End" or simply hang up the call to complete call transfer.

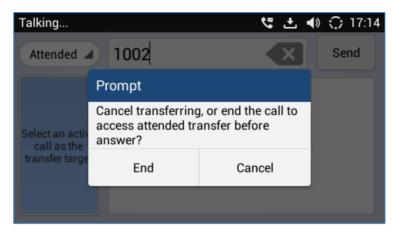


Figure 57: Attended Transfer - Transferring

5. After transfer target answers the call, the following screen will be shown up. If the user simply hangs up or taps on "End" soft key, the call wil be transferred, and GXV3240 will hang up the call. If the user taps on "Split" soft key to separate the calls, the user will talk to the second established call while the first call is on hold.

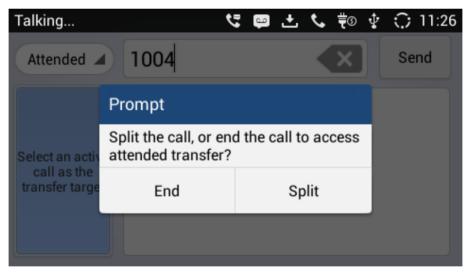


Figure 58: Attended Transfer - Split

- 6. Besides attended transfers above, users could also consult the third party first before transferring the call.
- 7. During the active call, tap + Add Call on the right panel to make the second call. This will place the current call on hold;
- 8. The second call establishes after the call is answered;
- 9. Press TRANSFER button 2 to bring up transfer screen. The other call on hold will be displayed

such as 😢 Ben ;





to

10. Select transfer mode as "Attended" in the transfer screen and tap on button such as transfer the call;



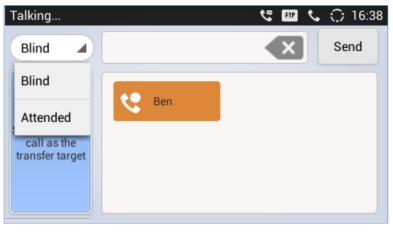


Figure 59: Transfer list screen

▲ Note:

- To transfer calls across SIP domains, SIP service providers must support transfer across SIP domains;
- If users would like to cancel the transfer, press 🗇 button to go back to the previous talking screen.

6-Way Conference

The GXV3240 supports up to 6-way audio conferencing.

Initiate Conference

- 1. When the phone is in idle, call screen, or during an active call, press CONFERENCE button **(b)** to bring up conference screen; users could also press CONF button in call screen right after off hook the phone;
- 2. Tap on to start adding party in conference;







Figure 60: GXV3240 Conference Screen

3. Enter the number of the party and tap on "Audio Call" / "Video Call" to add it to the conference, or click on "Contacts" to select a number from the local phonebook contacts.

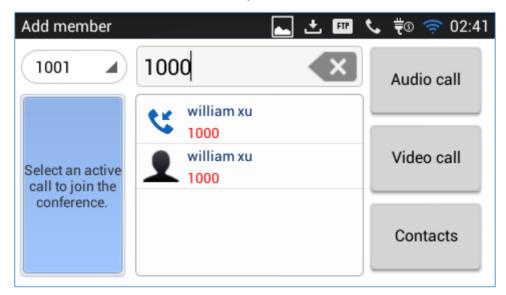


Figure 61: GXV3240 Conference - Add New Call to the Conference

If there are calls on hold, they will show up when adding member to the conference. Users could then tap on the call to add it to the conference directly.





Add member	💙 ⊾ 🙂	ᢏ ≢⊚ 🤝 02:44
1001		Audio call
Select an active call to join the	villia	Video call
conference.		Contacts

Figure 62: GXV3240 Conference - Add Existing Call to Conference

4. Repeat the above steps to add more parties into the conference. The following figure shows a 4-way conference established.

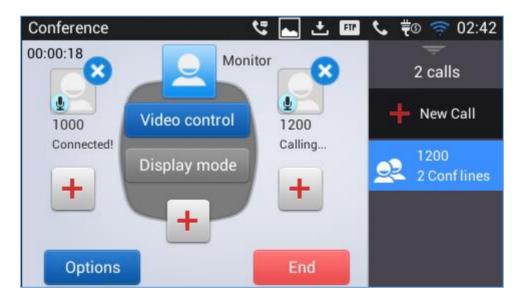


Figure 63: 4-way Conference Call Established

Remove Party from Conference

To remove a party from the conference, tap Solution on the right top corner for the corresponding party. This party will be disconnected from the conference.





End Conference

To end the conference, tap on to disconnect all the parties from the conference. GXV3240 will hang up the call. If the remote party hangs up the call itself, it will be disconnected from the conference but other parties on GXV3240 will stay in the existed conference.

Hold and Resume Conference

During the conference, users could press the HOLD button III to hold or resume the conference at any time.

Auto Conference Mode

The GXV3240 also supports "Auto Conference" which allows users to establish conference call in a quick and easy way, instead of adding the other parties one by one. To enable Auto Conference feature, go to web $GUI \rightarrow Advanced Settings \rightarrow Call Features$ and set "Auto Conference" to "Yes". To esablish call with auto conference when there are 1 or more calls on the GXV3240, simply press the conference button and all the calls on GXV3240 will be brought into the conference.

▲ Note:

During the conference, if the initiator of the conference hangs up, the conference will end. If users wish to allow the remaining parties to stay in conversation after the initiator hangs up, the conference initiator should set "Transfer on 3-way Conference Hang up" to "Yes" in web $GUI \rightarrow Account$ page $\rightarrow Call Settings$. This would allow the remaining parties to stay in the conference after the initiator exists the conference.

Missed Call

When there is a missed call, the LCD will show missed call dialog on the idle screen.

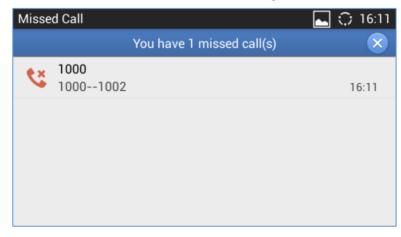


Figure 64: Missed Call Screen





Users can tap on the one of missed call entry to access the missed call log. To close the missed call screen

and return to the idle screen, tap 😢 on the upper right.


Note: Users may also disable the prompt for missed calls on web UI. Users may go to web UI \rightarrow **Account** \rightarrow **Call Settings** \rightarrow **Call Log**, users need to choose "Don't Prompt Missed Call" to disable the prompt for missed call logs.

DND (Do Not Disturb)

When DND is on, the incoming calls to the GXV3240 will be blocked for all registered accounts with a reminder ring produced.

To turn on/off DND:

1. Touch and drag the status bar down on the GXV3240 idle screen. Then tap on "System Settings".

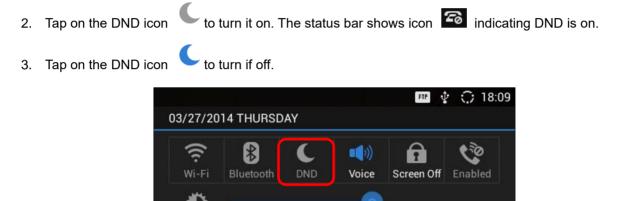

RJ9 Headset

Figure 65: Enable/Disable DND

System Settings

▲ Note:

- When the phone is in an active call, turning on/off DND won't affect the current active call. It will take effect starting from the next incoming call.
- When the DND is on, all the incoming call logs will be saved in Blacklist. They won't be saved in Call History.

Voicemail/Message Waiting Indication

When there is a new voicemail, the Message Waiting Indication (MWI) LED icon will blink in red on the

upper right corner of the GXV3240 and will show up in the status bar.

Media Channel: 🔵

Notification





To retrieve the voicemail:

- 1. Press the Message button and voicemail screen will show up, with all the registered accounts and the number of voicemails displayed.
- 2. Tap on the account to dial into the voicemail box. Then follow the Interactive Voice Response (IVR) for the message retrieval process.



Figure 66: Retrieve Voicemail

For each account, the Voicemail User ID can be set up under web $GUI \rightarrow Account X \rightarrow General Settings$: "Voice Mail UserID". This is the number that will be dialed out to access voicemail message when tapping on the account in Voice Mail screen.

Call Forward

Call forward feature can be set up from GXV3240 LCD or web GUI.

• From LCD

Go to onscreen Menu→Settings→Personalized Account→Select account name and tap on Call Forwarding to activate the feature. Then a list of options will show. Select the option to configure the call forward type (None, Unconditional, Time Based, Others) and then enter necessary number in the fields.





Call forwarding		÷	🕴 💭 10:41 AM
Call forward	ding mode		Others
Busy to Not configure	DND to		F
DND to Not configure			
No answer to Not configure	Cancel	ОК	F
No answer	timeout(sec.)		20

Figure 67: Call Forward when DND

• From Web GUI

Log in GXV3240 web GUI and go to **Account** page**→Call Settings**. By default, Call Forward feature is set to "None". The Call Forward feature options are:

Unconditional Forward: All the incoming calls will be forwarded to the number set up in "All To" field.

Call Forward Type :	Unconditional
All To :	23455432

Figure 68: Call Forward - Unconditional

Time Based Forward: All the incoming calls will be forwarded to the number as schedule in the time period. During the setup time, the call will be forwarded to the number in "In Time Forward To:" field. Other period the call will be forwarded to the number in "Out Time Forward To:" field.

Call Forward Type :	Time Based	
Time Period :	9:00 ~ 17:00	
In Time Forward To :	1234567	
Out Time Forward To :	1122331	

Figure 69: Call Forward - Time Based





Call Forward on Busy / Call Forward No Answer /Call forward when DND: The incoming call will be forwarded when the GXV3240 is busy or no answer after certain interval "Delayed Call Forward Wait Time (s)" or if the phone is set to DND mode.

Call Forward		
Call Forward Type :	Others	
Enable Busy Forward :	C Yes	
Busy To :		
Enable No Answer Forward :	Yes	
No Answer To :		
No Answer Timeout (s) :	20	
Enable DND Forward :	✓ Yes	
DND To :	4006	

Figure 70: Call Forward - Busy/No Answer/DND

Multi-Purpose Keys

The GXV3240 supports multi-purpose keys (MPK) without extension board (GXP2200EXT) by downloading MPK app from GS Market. After downloading the MPK app, users could configure the MPK from MPK

settings via LCD Menu \rightarrow MPK app $\stackrel{\text{MPK}}{\longrightarrow}$, or via web GUI \rightarrow Advanced Settings \rightarrow MPK LCD Settings.

To configure MPK via MPK app on the GXV3240:

- 1. Download MPK app from GS Market and install it to the GXV3240.
- 2. Open the MPK app. Tap 2 on the upper right of the app and then tap on 2 to start adding MPK numbers.
- 3. Select desired mode from Key mode dropdown list (Speed dial, Call transfer, Intercom, Dial prefix, etc ...)





Add number			🛌 🎫 🛜 03:50
×	Cancel		🗸 ок
Key Mode	Speed Dia		
Number List			
	Name	Number	Account
			4001 🖌 🕒

Figure 71: GXV3240 MPK APP - Add Number

4. For the number list, users could manually enter it or select number from Contacts to add it.

Choose number		
	🗙 Cancel	🗸 OK(1)
Gal	Albert	
	Mobile:3514	Ď.
В		Ģ
New P	Ben	
	Mobile:3536	
J		Ř
-	john	Ť
	Mobile:3546	💌 🔅
L		ž

Figure 72: GXV3240 MPK APP - Add Number from Contacts

5. The added number will show in the list as the figure shows below.

Number List		 <!--</th-->
john 3546		Image: A start of the start
lily 3000) Speed Dial	
Ben 3536	5 Speed Dial	

Figure 73: GXV3240 MPK APP - Number List





Shared Call Appearance (SCA)

The GXV3240 supports shared call appearance by Broadsoft standard. This feature allows members of the SCA group to share SIP lines and provides status monitoring (idle, active, progressing, hold) of the shared lines. When there is an incoming call designated for the SCA group, all of the members of the group will be notified of an incoming call and will be able to answer the call from the phone with the SCA extension registered.

All the users that belong to the same SCA group will be notified by visual indicator when a user seizes the line and places an outgoing call, and all the users of this group will not be able to seize the line until the line goes back to an idle state or when the call is placed on hold (with the exception of when multiple call appearances are enabled on the server side). In the middle of the conversation, there are two types of hold: Public Hold and Private Hold. When a member of the group places the call on public hold, the other users of the SCA group will be notified of this by the yellow-flashing button and they will be able to resume the call from their phone by pressing the line button. However, if this call is placed on private-hold, no other member of the SCA group will be able to resume that call. To enable shared call appearance, the user would need to register the shared line account on the phone. In addition, they would need to enable SCA and configure SCA options via LCD or web GUI.

To configure SCA via LCD, go to **Settings**→**Personalized Account** and select one account first. Then tap on "Shared Call Appearance (SCA)" to turn it on.

Shared Call Appear	⊾ 🎟 🤶 03:56
Shared Call Appearance(SCA)	ON
Enable Barge-in	ON
Autofill CallPark Service Code	ON
Call Park Service Code:	Not configured
Seize Line Timeout(Secs):	15

Figure 74: GXV3240 SCA Settings on LCD

To configure SCA via web GUI, go to **Account** page → **SIP Settings** to fill out the options in the following figure.





ΓYes
∏ Yes
▼ Yes
15
Save Cancel

Figure 75: GXV3240 SCA Settings on Web UI

For more information about SCA configuration and function, please refer to the link below: <u>http://www.grandstream.com/sites/default/files/Resources/GXV32xx broadworks SCA Guide 0.pdf</u>

Call Features

The GXV3240 supports traditional and advanced telephony features including caller ID, caller ID with caller Name, call waiting, call forward and etc. Before using the following feature code, please make sure "Enable Call Features" option is set to "Yes" under web GUI \rightarrow **Account** page \rightarrow **Call Settings**.

Table 9: GXV3240 Feature Code

	Use Preferred Codec (per call)
	• Dial *01 followed by the preferred codec code and the phone number.
	• The phone will try to use this codec during the call.
	Codec code:
	PCMU: 7110
*01	PCMA: 7111
01	G726-32: 72632
	G722: 722
	G729: 729
	iLBC: 7201
	For example, if the user would like to use PCMA as the preferred codec to call phone number 334455, enter *017111334455.





	Force Codec (per call)
	• Dial *02 followed by the preferred codec code and the phone number.
	• The phone will be forced to use this codec during the call.
	Codec code:
	PCMU: 7110
*02	PCMA: 7111
	G726-32: 72632
	G722: 722
	G729: 729
	iLBC: 7201
	For example, if the user would like to use PCMA to call phone number 334455, enter *017111334455.
*30	Block Caller ID (for all subsequent calls)
	• Dial *30.
+04	Send Caller ID (for all subsequent calls)
*31	• Dial *31.
	Disable Call Waiting
*50	• Dial *50.
	Enable Call Waiting
*51	• Dial *51.
*67	Block Caller ID (per call)
	 Dial *67 followed by the phone number.
*82	Send Caller ID (per call)
02	Dial *82 followed by the phone number.
	Disable Call Waiting (per Call)
*70	Dial *70 followed by the phone number.
	Enable Call Waiting (per Call)
*71	 Dial *71 followed by the phone number.
*72	Unconditional Call Forward. To set up unconditional call forward:
	 Dial *72 followed by the phone number to forward the call.





*73	 Cancel Unconditional Call Forward. To cancel the unconditional call forward: Dial *73.
*74	 Paging Call Dial *74 followed by the phone number to send the paging call.
*83	 Force Audio Calling (per call) Dial *83 followed by the phone number to send the audio call.
*84	 Force Video Calling (per call) Dial *84 followed by the phone number to send the video call.
*90	 Busy Call Forward. To set up busy call forward: Dial *90 followed by the phone number to forward the call.
*91	 Cancel Busy Call Forward. To cancel the busy call forward: Dial *91.
*92	 Delayed Call Forward. To set up delayed call forward: Dial *92 followed by the number to forward the call. The default timeout before the call is forwarded is 20 seconds.
*93	 Cancel Delayed Call Forward. To cancel the delayed call forward: Dial *93.





CONTACTS

Users can manage contacts by adding, deleting and modifying single contacts, downloading contacts from HTTP/HTTPS/TFTP server, importing contacts from external storage and exporting contacts to external storage.

There are three ways to access GXV3240 contacts:

- On the keypad, press 🕮 button.
- On the phone's idle screen or menu, open Contacts app by tapping on icon
- On the phone's idle screen or menu screen, tap on icon **I** on the bottom of the screen.

The following figure shows main page of Contacts on the GXV3240.

Contacts		\bigcirc	13:55
Contacts			
Local	Contacts		
	Contacts		
BS Co	ntacts		

Figure 76: GXV3240 Contacts

Tap the icon to access the main page of Contacts. The LDAP Contacts includes the contacts in specific LDAP server, and BS Contacts includes the BroadWorks Xsi Contacts. They need to be configured with the remote LDAP server or BroadWorks server to enable these features.

Note: Users could set the "Phonebook Key Function" on phone's Web UI→Maintenance→Contacts. Users could set the phonebook key to "Default", "LDAP Search", "Local Phonebook", "Local Group", and "BroadSoft Phonebook".

Local Contacts

Users can manage contacts by adding, deleting and modifying single contacts, downloading contacts from HTTP/HTTPS/TFTP server, importing contacts from external storage and exporting contacts to external storage.





Contacts	🕑 🌵 🗘 18:09
<u>2</u> ★ 👱	_ , < ≡
A	4 contacts 🛔
Albert 3514	💽 📃
В	
Ben 3536	🕓 亘 🖁
J	ŕ
john 3546	C 🗊 ż

Figure 77: GXV3240 Local Contacts

On the upper left of the Contacts screen, users can tap on the icon to access three different categories in the contacts:

- All contacts.
- Favorite Contacts
- Groups

Add Single Contacts

- 1. Tap on 😫 to access all contacts.
- 2. Tap on to bring up "New Contact" dialog to manually add a new contact. See [*Figure 78: GXV3240*

Contacts - Add New Contact].

3. Enter First name, Last name, Phone number and other information for the new contact. Please make sure the account number field is selected so the GXV3240 will use this account to dial out the new contact. The account number field is located on the left of the "Phone" filed as highlighted below.




Figure 78: GXV3240 Contacts - Add New Contact





Note: When typing a number using dial pad, "Add to contacts" button will appear as displayed on following picture, to add a new entry to your contacts list if the input number does not match any entry in your contacts.

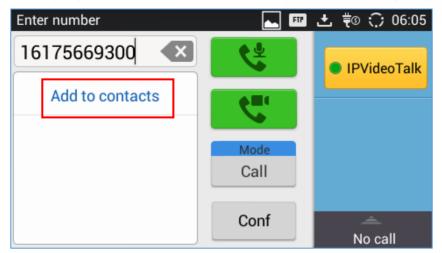


Figure 79: Add contacts from DialPad

Import/Export Contacts

If the users have the GXV3240 phonebook file saved in local storage or external storage device that has been plugged into the GXV3240, the phonebook file can be directly imported to the Contacts. There are three different formats supported for the phonebook file: "csv", "vcard", and "xml". Users could manually create contacts first and export the phonebook file in csv, vcard or xml format to take a look on the phonebook file.

To import contacts:

- 1. Open Contacts.
- 2. Tap is on the upper right of the Contacts screen.
- 3. Select "Import" to bring up "Import Contacts" dialog.

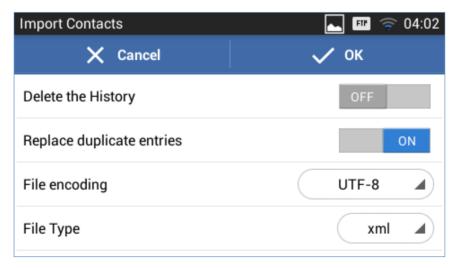


Figure 80: GXV3240 Contacts - Import Contacts





- 4. Fill in the import options and scroll down to the bottom of the screen.
- 5. Tap on "Select the file" to import phonebook file from the directory in internal or external storage device.

To export contacts:

- 1. Open Contacts.
- 2. Tap on **E** on the upper right of the Contacts screen.
- 3. Select "Export" to bring up "Export Contacts" dialog.

Export Contacts 💽 🌆 🤿		
🗙 Cancel	🗸 ок	
File encoding	UTF-8	
File Type	xml 🔺	
Choose Directory	/mnt/sdcard	

Figure 81: GXV3240 Contacts - Export Contacts

- 4. Select the file encoding and file type for the exported phonebook file. By default, the GXV3240 is using "UTF-8" as the encoding method.
- 5. Tap on "Choose Directory" and select the directory where the phonebook file will be exported to.

Download Contacts

The GXV3240 supports downloading XML phonebook from a remote HTTP/HTTPS/TFTP server to local Contacts. When downloading the phonebook, the GXV3240 sends request to the HTTP/HTTPS/TFTP server looking for file **phonebook.xml**. For more details about GXV3240 phonebook, please refer to the following link:

http://www.grandstream.com/sites/default/files/Resources/gxv3240_xml_phonebook_guide_1.pdfhttp://www.grandstream.com/products/gxv_series/gxv3240/documents/gxv3240_xml_phonebook_guide.pdf

To download phonebook:

- 1. Make sure the GXV3240 can connect to the HTTP/HTTPS/TFTP server and the phonebook.xml file in correct format is downloadable from the HTTP/HTTPS/TFTP server.
- 2. Open Contacts.

3.

- Tap e on the upper right of the Contacts screen.
- 4. Select "Download" to bring up the "Download Contacts" dialog.





Download Contacts	🛌 🎫 🦙 04:06	
🗙 Cancel	🗸 Save	🛨 Download Now
Delete the History		ON
Replace duplicate entries		ON
Download Mode		http 🖌
File encoding		UTF-8

Figure 82: GXV3240 Contacts - Download Contacts

5. Fill in the necessary options and then tap on "Download Now". The GXV3240 will send out request to the configured HTTP/TFTP server.

Search Contacts

- 1. Open Contacts.
- 2. Select or to open the contact list where you would like to search.
- 3. Tap on the upper right to bring up search dialog.
- 4. Enter contact's name or number to search. The search result will be automatically updated and displayed when entering the key words.

Use Contacts

Once the contacts are added, users could navigate in the contacts list is to make a call, send message and manage the contacts furthermore.

Make a Call to Contacts

Scroll up/down to find the contact in the list and tap on 🕓 to call this contact.

Send SMS Message to Contacts

Scroll up/down to find the contact in the list and tap on \bigcirc to call this contact.

Select Contacts

1. Scroll up/down to find the contact in the list.





- 2. Touching and pressing on the contact for about 2 seconds until the checkbox shows up.
- 3. Tap on the checkbox for the contacts to be selected.



Figure 83: GXV3240 Contacts - Select Contacts

Add Contacts to Favorites

- 1. Select the contact to be added as described in [Select Contacts].
- 2. Tap on 🧮 and select "Add to favourites".

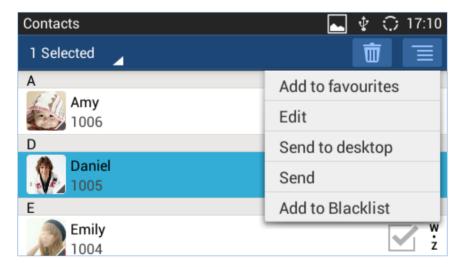


Figure 84: GXV3240 Contacts - Contacts Options

There are another 2 methods to add contacts to favorites.

- When adding or editing single contact, tap on 📩 to add the contact to favorite, or
- Tap on 📩 to navigate to favorite category. Then tap on 🗵 to select the contacts to be added to favorites.





Edit Favourite Cont	Ŷ	🗘 17:12
🗙 Cancel	🗸 ок	
Check the Contacts will add to the favourites list		
Amy 1006		
Daniel 1005		
E		
Emily 1004		
B		



Edit Contacts

- 1. Select the contact as described in [Select Contacts].
- 2. Tap on 📃 to edit the contacts.

Send Contacts to Desktop Shortcut

- 1. Select the contact as described in [Select Contacts].
- 2. Tap on and select "Send to desktop". A shortcut for this contact will be created on the idle screen for the users to access.

Share Contacts via Bluetooth

- 1. Select the contact as described in [Select Contacts].
- 2. Tap on and select "Send". Users will be able to send this contact to the connected Bluetooth device with the GXV3240.

Add Contacts to Blacklist

- 1. Select the contact as described in [Select Contacts].
- 2. Tap on end select "Add to Blacklist".

Add Group

Open Contacts and tap on 😟 to access group. To add a new group, tap on 🕮 and select the

existing contacts to the group.





New Group	🛌 🌵 🗘 17:12
🗙 Cancel	🗸 ок
Group name	Ringtone None 🔺
Check the contacts will add to the gro	up
A	
Amy 1006	
D	
Daniel 1005	


Figure 86: GXV3240 Contacts - Add New Group

▲ Note:

- Users could also select group for the contact when adding or editing the contact.
- Ringtone can be assigned in group as well as single contact. If the group has ringtone set to "Custom Ringtone", this ringtone has the highest priority when there is an incoming call to the contact.

Contacts Storage Status

The GXV3240 default maximum contacts storage is up to 1000. To check contact storage status, tap on

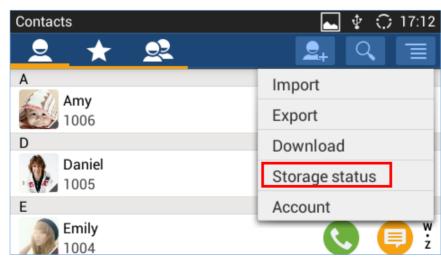

to bring up contacts options and select "Storage Status".

Figure 87: GXV3240 Contacts – Contact Options





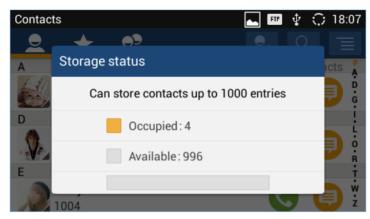


Figure 88: GXV3240 Contacts - Storage Status

Note: Users could increase the number of maximum contacts storage to more than 1000 contacts on GXV3240. Users may access the phone through telnet, and change the P value P1688 to another number (<=10000) to increase the default contacts storage. In this case, if users increase this default P value, the phone resource will be cost, and the phone performance will be slower.

Add Account to Sync Up Contacts

On the GXV3240, users could add 3rd party application account (e.g., Gmail, Microsoft Lync, Skype, and etc.) so that the contacts there could be added to the GXV3240.

To add 3rd party application account:

- 1. Make sure the 3rd party application is installed successfully. For example, install Skype from GS market if you would like to add Skype account's contacts to the GXV3240.
- 2. Open contacts.
- 3. Tap on to bring up contacts options and select "Account".

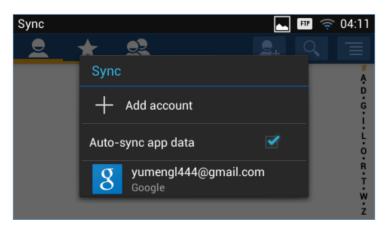


Figure 89: GXV3240 Contacts Options- Account

4. An installation wizard will guide the user to set up the account to sync the contacts step by step. Tap on "Add account" if there is no logged-in account set up on the GXV3240 yet.





5. The following figures describe adding a Google account for sync-up purpose. Tap on "Google" to add a Google account.

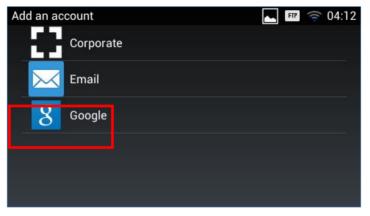


Figure 90: Add Account to Sync up in Contacts

6. Follow the wizard and select "Existing" or "New" for the Google account.

Google Account Add a Google Account	FTP 🤶 04:12
Do you want to add an existing account or create a new one?	Existing
	New

Figure 91: Add Google Account to Sync up in Contacts

If users select "Existing", sign in with the Email address and password to complete the setup.

Type Email and Pa	🔼 FIP 🤶 04:13
Sign in	
Email	
Password	
•	

Figure 92: Sign in Google Account





LDAP PHONEBOOK

In addition to local contacts, the GXV3240 also supports LDAP and LDAPS phonebook if LDAP or LDAPS server is available within the network. Please refer to the following link for more details about how to use LDAP phonebook on the GXV3275, same configuration should be done on GXV3240:

http://www.grandstream.com/sites/default/files/Resources/gxv3275 ldap book guide.pdf





BROADWORKS XSI CONTACTS

Besides the Local and LDAP phonebook, the GXV3240 also supports BroadWorks Xsi contacts if BroadWorks XSP server is available within the network. Please refer to the following link for more details about how to use BroadWorks Xsi Contacts on the GXV3240:

http://www.grandstream.com/sites/default/files/Resources/GXV_XSI_Guide.pdf





BLACKLIST

The GXV3240 has blacklist support for users to manage incoming calls. To access blacklist, tap on icon

in the phone's menu.

Block History

Open blacklist and tap on to view the block history. It shows the detailed information for the blocked calls: caller number, caller name and calling time.

Restore Blocked Number

The blocked number in the block history can be restored to call history and the number will be removed from blacklist. To do this:

- 1. In the block history, touch and press the entry for about 2 seconds until checkbox displays.
- 2. Tap on the checkbox for the entries to be selected.
- 3. Tap on 🧾 and select "Restore to Call History".

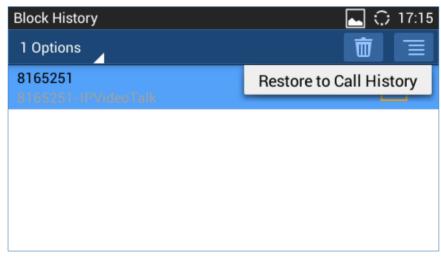


Figure 93: Restore Blocked Number

4. A dialog will pop up for users to confirm. Tap on OK to restore this number to call history and the number will be removed from blacklist.





Delete Block History

- 1. In the block history, touch and press the entry for about 2 seconds until checkbox displays.
- 2. Tap on the checkbox for the entries to be selected.
- 3. Tap on to delete the selected entries.
- Users could also tap on uirectly to clear all block history logs.

Edit Blacklist

Tap on and users will see all the blacklist numbers.

Add Blacklist

1. Tap on to start adding new entry to the blacklist. The blacklist can be added manually, add from contacts, or added from call history.

Blacklist			🗘 10:49
ও	Ø	\$	+
		Manuallu add	
		Manually add	
		Add from contacts	
		Add from call history	

Figure 94: GXV3240 Blacklist - Add Blacklist

2. The following figure shows manually adding number to blacklist. Once **Manually add** option is selected, a window will be prompted for users to enter the phone number in the first field and name/other note information in the second field (optional). Tap on **Save** to finish the adding operation.





Blacklist			🎟 📐 🗘 11:00
1	s a		- +
	Add number to bl	acklist	
	Enter phone r	number	
	Note (optiona	l)	
	Cancel	Save	

Figure 95: Manually Add Number to Blacklist

Edit Blacklist

- 1. In the blacklist, touch and press the entry for about 2 seconds until checkbox displays.
- 2. Tap on it to edit the blacklist.
- 3. Tap on OK once done.

Blacklist	🛌 🎟 🗘 11:03
1 Options	💉 🛅
John 523644	
Amy 562333	

Figure 96: Edit Entry from Blacklist

Delete Blacklist

- 1. In the blacklist, touch and press the entry for about 2 seconds until checkbox displays.
- 2. Tap on the checkbox for the entries to be selected.
- 3. Tap on to delete the selected entries.





Blacklist Settings

Tap on to access blacklist settings.

- **DND Mode**: Turn on/off DND mode. If turned on, all incoming calls will be rejected.
- **Block Mode**: Turn on/off Block Mode. If turned on, the **Block Options** will be activated so that the specific incoming calls will be blocked as defined in **Block Options**.
- Block Options: Select Block All, Block Blacklist Only, Block Anonymous or Block Anonymous And Blacklist. The option is valid only when Block Mode is on;
- Block Notification: Turn on/off Block Notification. If turned on, the block icon 😢 will be displayed in

the status bar after the phone blocks incoming calls. Users could touch and drag the status bar and tap on the block notification to view details.

• Time Settings: Set up the block schedule. Select Block 24 Hours or Modify Time by specifying the Starting Time and Ending Time.

Settings		FTP	Ŷ	18:03
V 🐻	\$			
DND Mode				
DND Mode			OFF	
Do no disturb			UFF	
Block Mode				
Block Mode				ON
Block Options	Block Blacklist Only			

Figure 97: Blacklist Settings






CALL HISTORY

GXV3240 Call history provides users access to phone's call logs in different categories. Call history can be accessed in the following two ways:


- Tap 😢 on phone's menu or idle screen if call history shortcut is created on the desktop, or
- Tap 🤨 on the bottom of the idle screen or menu screen.
- GXV3240 supports local and BroadWorks Xsi call history.


The following figure shows main page of Call History on the GXV3240.

Call Hist	ory	ि	14:53
Call I	History		
S	Local CallHistory		
C ert	BS Calllog		



Local Call History

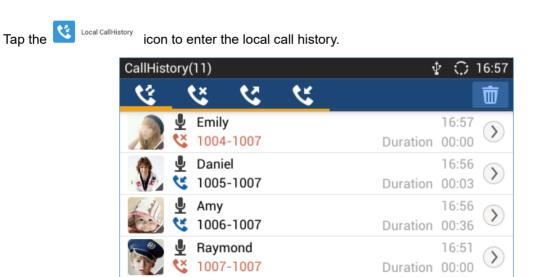







There are four different categories in the call history. Users could tap on the icon on the top menu to access the corresponding call logs:



Missed calls

Dial Out from Call History

Tap on one of the call history entry to call this number directly. The phone will use the same account as the call log when dialing out.

Call History Options

- Touch and press the call history entry for about 2 seconds until the checkbox displays.
- Then tap on to bring up the options. Users can edit this number before calling, add this number to contacts, add this number to balcklist and send text message to this number.

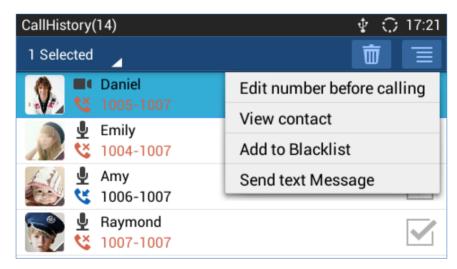


Figure 100: GXV3240 Call History – Options

Delete Call History

- Touch and press the call history entry for about 2 seconds until the checkbox displays.
- Tap on the checkbox to select the call history entries. The icon turned to indicates the entry is selected.





to delete the entries. Tap on

Call History Details

For each call history entry, users could tap on \diamond on the right side of the entry to access the details.

Details		2	🜵 🗘 ।	9:26
john 3546-3165		٩.		
19:26	Duration	00:00		0
17:41	Duration	00:00	(0
17:26	Duration	00:00		0
17:24	Duration	00:00		0

Figure 101: GXV3240 Call History - Details

The following operations could be done:

Dial out this number directly.

- Bring up dial screen with the call history number. Users could edit the number before dialing out.
 - Delete the entry.
- Options "Clear all", "Add to Contacts", "Add to Blacklist", or "Send Text Message" for the number in this entry.

Broadworks XSI Call History

Besides the Local Call History, the GXV3240 also supports BroadWorks Xsi call history if BroadWorks XSP server is available within the network. Please refer to the following link for more details about how to use BroadWorks Xsi Call History on the GXV3240:

http://www.grandstream.com/sites/default/files/Resources/GXV_XSI_Guide.pdf





SMS

The GXV3240 has built-in SMS application to send/receive message, if the SIP server supports SMS message.

Users can create, edit draft, delete and check the storage status of SMS. The SMS app supports up to 1000

messages. Tap on **u** on the phone's menu or desktop to launch SMS application.

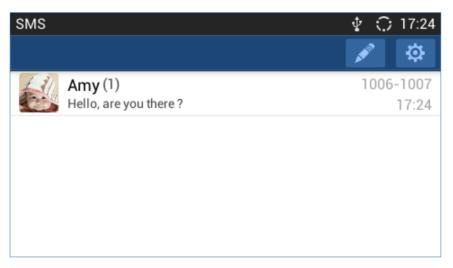


Figure 102: GXV3240 SMS Message

View SMS

On the SMS list screen, tap on one of the message to view the SMS details.

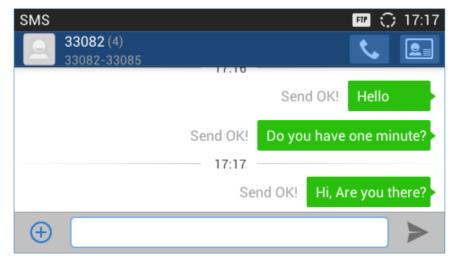


Figure 103: View SMS Dialog





Create New SMS

Tap on

in SMS application to start composing a new message.

S	MS			 Image: A set of the set of the	े 🕴	19:32
				3165		
	33082	33082				
	(+)					►

Figure 104: Create New Message

- 1. Select account to send the message from. (**Note:** Only registered accounts will be shown on the selection drop-down list, if you cannot find your account then make sure it's registered).
- 2. Select the account to send the SMS message in the drop-down box on the right side of the top menu.
- 3. Add number to send the message to.
- 4. Enter the number of the contact to send the message to on the left side of the top menu. Users could

also select contact from GXV3240 Contacts by tapping on Select the account to send the SMS message in the drop-down box on the right side of the top menu.

- 5. Input content: Enter the message content on the bottom field of the screen. Tap on "Done" once finished.
- 6. Send message: Tap on the arrow icon 🔎 when you are ready to send the message out.

Delete SMS

- 1. Touch and press one SMS message for about 2 seconds until the checkbox shows.
- Select the checkbox for the messages to be deleted. Users could also tap on select/unselect all message.



3. Tap on to delete the selected messages.





CALENDAR

In Calendar application, users could synchronize events from Google account as well as create, modify and view the events. The GXV3240 also provides notification for the upcoming events from the Calendar. Tap

on **17** to launch Calendar application.

Sign in Calendar

While launching the Calendar application for the first time, the users will be required to sign in with a Google account.

Google Account Make it Google	○ 11:3
Do you want to add an existing account or create a new one?	Existing
	New
	Not now

Figure 105: Sign In Calendar with Google Account

View Calendar

Once signed in, tap on the upper left softkey in the Calendar application to select different format to view the calendar. Users can select "Day" "Week" "Month" or "Agenda" from there.

Calendar 🔄 🗘 11:44					
March 2014 🔺 💈				21 Toda	y 🖿
Dav	March 1	WED	THU	FRI	SAT
Day	Marchin	26	27	28	1
Week	Feb 23 – Mar 1	5	6	7	8
	March	12	13	14	15
Month		19	20	21	22
Agenda	March 1	26	27	28	29
20	21 1	2	2	4	5

Figure 106: View Calendar

When viewing the calendar by month, the blue mark on the date indicates there is event scheduled on that day. Tapping on it can view the scheduled event.





Calendar						.) 12:26
March 2	.014 📕				21 Toda	y 🐂
SUN 16	MON 17	TUE 18	WED 19	тни 20	FRI 21	SAT 22
23	24	25	26	27	28	1
2	3	4	5	6	7	8
9	10	11	12	13	1 4	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29

Figure 107: View Calendar by Month

Cale	ndar		FTP	ि	12:54
FRID Ma	DAY Arch 14, 2014 🖌	21	Toda	iy	'B_+
00 W	/rite a case plan.				
⁰¹ S	ee my manager Office				
02					
03					

Figure 108: View Calendar by Day

Create Event

- 1. Tap on a date in the Calendar application to bring up the event list for that day.
- 2. On the upper right, tap on **u** to create a new event.

Calendar	🎟 ⊾ 🗘 12:37	Calendar 💽 🖬 🗘 12:20
saturday March 1, 2014 🖌	21 Today 🖢 📛	
00		yumengl444@gmail.com
01		Event name
		Location
02		FROM Fri, Mar 14, 2014
02		

Figure 109: Create Event

Calendar Options

In the Calendar application, press MENU button (In the Calendar options) Users could refresh calendar, search events and synchronize calendar with Google account by tapping on "Settings".





EMAIL

GXV3240 provides built-in Email application for users to access personal or business Email account. Tap

on 🖾 to launch Email application.

Sign in Email

When launching the Email application for the first time, a wizard will be provided for users to set up the Email account step by step.

Account setup	📐 🎟 🧕 🗘 15:02
You can set up email for m few steps.	nost accounts in just a
Email address	
Password	
Manual setup	Next

Figure 110: Sign in Email

- 1. Enter the Email address and Password.
- 2. Tap on "Next" for quick setup, or tap on "Manual setup" to manually configure more options.
- 3. If "Manual setup" is selected in step 2, users will need to choose the account type "POP3" "IMAP" or "EXCHANGE" depending on the type of your Email account.

Account setup		🚥 🛌 🗘	15:50
What type of account	is this?		
	POP3		
)	
)	
	IMAP		
)	
	Evaluation	1	
	Exchange	J	

Figure 111: Select Email Account Type





• POP3 setup. When using POP3, the sent Emails are stored locally instead of the server side. Please check with your network administrators for the correct Email account settings for POP3.

Account setup	FTP 🛌	*	਼	20:29
POP3 server				
pop3.gmail.com				
Port				
995				
Security type				
SSL/TLS				
Delete email from server				
Never				

Figure 112: Email Account Type - POP3

 IMAP setup. When using IMAP, the Emails stay on the server side and users can see them from other devices as well. Please check with your network administrators for the correct Email account settings for IMAP.

Account setup	 F	*	਼	20:29
IMAP server				
imap.gmail.com				
Port				
993				
Security type				
SSL/TLS				
IMAP path prefix				
Optional				

Figure 113: Email Account Type - IMAP

• EXCHANGE setup. When using EXCHANGE, all Emails are stored in the central Exchange mail server and can be checked using capable mail client such as Microsoft Outlook. Please check with your network administrators for the correct Email account settings for EXCHANGE.





Αссοι	int setup		📼 🖻 🗘	15:09
	Server settings			
	Domain\Username	avc		
	Password	•••••		
	Server	ghj.com		
		connection (SSL)		
	Accept all S			
	Client certificate None	Select	t	

Figure 114: Email Account Type - EXCHANGE

4. If "Next" is selected in step 2, users will see the following default account settings. Tap on "Next" again.

Account settings	15:21
Inbox checking frequency	
Every 15 minutes	
Send email from this account by default.	
Notify me when email arrives.	
Sync email from this account.	
Automatically download attachments when con Wi-Fi	nected to

Figure 115: Email Account Settings

5. Set up "Your name" to be displayed on the outgoing messages and tap on "Next" again. Users should be able to start using the Email account now.

Email Options







Email Folders

Tap on 🔲 to open up folders.

Multiple Email Accounts

Users could also add more than one Email account on the GXV3240. To do this, go to phone's **Settings—**>**Accounts**, tap on "Add account" and select "Email". A new Email account setup wizard will show up for users to add the Email account.

Once another Email account is successfully added, users could tap on the account Email address on the upper left to switch between the Email accounts.

Email		\times	<u> </u>	4 × ⊖	16:37	
\sim	Inboxyumengl44@gmail.com	<u>_20</u>		Q		
F	yumengl44@gmail.com	20			10:45	
F	yumengl444@gmail.com	4	更多你的) (电子邮件	朋友。 在 ⊧联系人。	_*	
	Combined view 2 accounts	24			Mar 20	
F	Recent folders (yumengl44@ hg - Career ber, Every day, we					
-	Drafts	1			Mar 19	
	Sent		w – Sear ention 30			

Figure 116: Multiple Email Accounts





GS MARKET

The GXV3240 supports extensive amount of 3rd party Android applications. Users could install those applications from the built-in GS Market. If Google Play application is installed from GS market, users could log in and download all kinds of applications there as well.

Tap on **u** at the phone's menu or desktop to launch the GS Market. Users could browse, search, download and install the apps from there for tools, games and other applications.

View APPS

Open GS market and there are four different categories "HOT", "APP", "GAME" and "TOOLS". In the displayed applications, tap on one of the application and users will be able to see the details such as descriptions, publish date, version, rate, comments and etc.

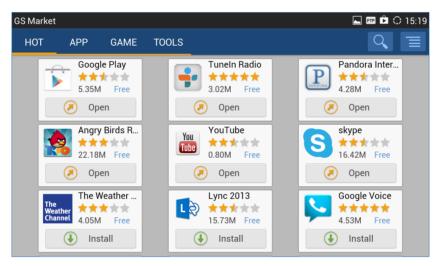


Figure 117: GXV3240 GS Market

Search APPS

Open GS market and tap on C to input the key words for the app you are looking for.

- 1. Open GS market and find the app you would like to install.
- 2. Tap on "Install" softkey for the app. It will start downloading.
- 3. Once downloaded, the installation process will start automatically.
- 4. Tap on to view the downloaded apps and installed apps from GS market.





GS Market	Ŷ	19:53
DOWNLOAD INSTALLED		t
Version:3.9.17 Storage:5.35 M		
Lync 2013 Version:5.1.0000 Storage:15.73 M		
Skype Version:3.0.0.6181 Storage:14.53 M Can b	e upda	ated

Figure 118: GXV3240 GS Market - Downloaded Applications

Update APPS

The GXV3240 will automatically detect if there is a new version available for the installed apps to upgrade when the network connection is available and stable. Users can also view update status and manually update the apps in GS Market.

To update apps, open GS Market and tap on it to access the installed apps. Users will see the Update option for the app that has new version available.

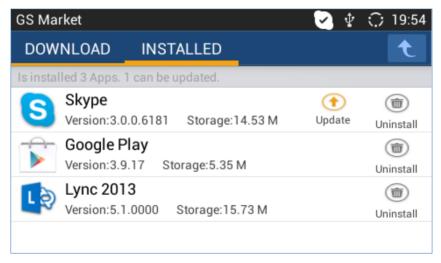


Figure 119: GXV3240 GS Market - Installed Applications

Uninstall APPS

- 1. Open GS Market and tap on 📃 to access the installed apps.
- 2. User will see "Uninstall" option for each app. Tap on "Unstall" for the app you would like to unstall.





3. A confirmation dialog will pop out. Tap on "OK" to start uninstallation.

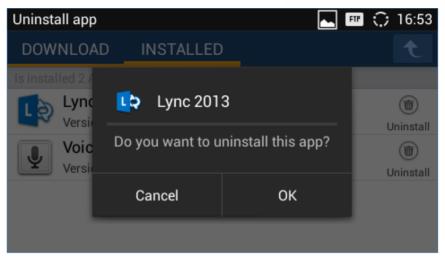


Figure 120: GXV3240 GS Market - Uninstall Applications





TOOLS

File Manager

File Manager is a tool that allows users to delete, move, copy/paste, send and rename files. It helps users to access and manage files in local storage as well as external storage devices (e.g, SD card/USB flash

drive). Tap 📮 on the phone's menu or desktop to launch File Manager application.

Copy and Paste Files

Follow the steps below to copy and paste a file on the GXV3240.

1. Open file manager and navigate to the directory of the file to be copied. Touch and press on the file for about 2 seconds until the checkbox shows up.




Figure 121: GXV3240 File Manager - Select File

- 2. Select the files or folders to be copied. Tap on **1** Options **1** to select all files or unselect all files.
- 3. Tap on 🧮 and select "Copy". The file will be copied.
- 4. Tap on the root directory **1** to go back to the root directory. Navigate to the destination folder where you would like to paste the file to.






Figure 122: File Manager Root Directory









Move Files

The steps to move a file is similar to copy/paste a file. The difference is once the file is moved, the file will not be kept in the source folder. Follow the steps below to move a file on the GXV3240.

1. Open file manager and navigate to the directory of the file to be copied. Touch and press on the file for about 2 seconds until the checkbox shows up.

FileManager			🛊 🗘 19:23
1 Options			
0925	123	20130905	20131026
20131026下午	201401231704 59.pcap	201402130000 00.jpeg	201402130000 01.jpeg

Figure 124: GXV3240 File Manager - Select File

2. Select the files or folders to be moved. Tap on

to select all files or unselect all files.

- and select "Move". The file will be copied. Tap on 3.
- to go back to the root directory. Navigate to the destination folder where Tap on the root directory 4. you would like to move the file to.





FileManager		± ₩) 🖞 💭 11:47
7			
Internal storage	USB Disk	Screensaver	

Figure 125: File Manager Root Directory

FileManager		🔜 🚥 ὰ 🜒 🕫 🔢 🖇 🗘 17:1	2
/ 🕨 Inter	nal Storage 🕨 tmp 🕨	् 🕇	
	× Cancel	🖹 Paste	

Figure 126: Paste File

Send Files

The users can send a file via Bluetooth or other applications from file manager. Please make sure Bluetooth is turned on and connected to the Bluetooth devices, or the applications are set up properly already. Otherwise, users will be directed to set it up before the file can be sent out.

To send a file:

- 1. Open file manager and navigate to the directory of the file to be sent over. Touch and press on the file for about 2 seconds until the checkbox shows up.
- 2. Select the files or folders to be sent. Tap on 1 Options

Ito select all files or unselect all files.





FileManager			🕴 🗘 19:23
1 Options			
0925	123	20130905	20131026
20131026下午	201401231704 59.pcap	201402130000 00.jpeg	201402130000 01.jpeg

Figure 127: GXV3240 File Manager - Options

3. Tap on and select "Send". A new dialog window will pop up for users to send the file via Bluetooth or other applications.

Delete Files

- 1. Open file manager and navigate to the directory of the file to be sent over. Touch and press on the file for about 2 seconds until the checkbox shows up.
- 2. Select the files or folders to be sent. Tap on **1** Options to select all files or unselect all files.
- 3. Tap on . A confirmation dialog will pop up.
- 4. Tap on OK to delete the file(s).

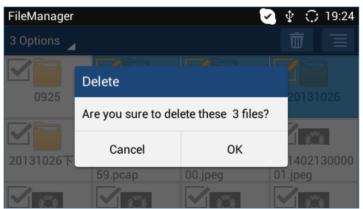


Figure 128: Delete File(s) via File Manager

Rename a File

1. Open file manager and navigate to the directory of the file to be sent over. Touch and press on the file for about 2 seconds until the checkbox shows up.





- 2. Tap on and select "Rename". A new dialog window will pop up for users to enter the new name.
- 3. Tap on OK.

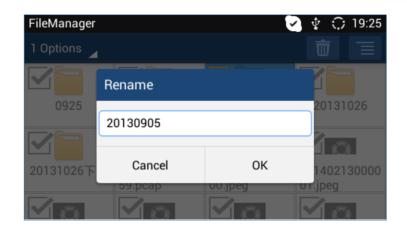


Figure 129: Rename File

⚠ _{Note:}

Under the File Manager root directory, screensaver is a system folder that users could not create or delete files/folders there.





FTP SERVER

The GXV3240 supports file transfer via FTP server. Once installed, users could access the GXV3240 file

system from PC. Tap on in the phone's menu or desktop to open FTP Server application.

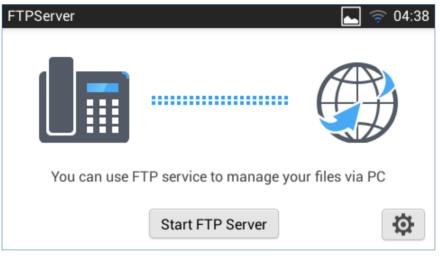


Figure 130: FTP Server - Start

Tap on "Start FTP Server" to turn the server on. The FTP server address URL will be provided on the screen.



Figure 131: FTP Server - Stop

For security purpose, users could also tap on in the above figure to set up username, password, port number and directory for remote access. By default, when the users access the ftp server from a PC, a prompt will show asking for user name and password. The default user name and password are "admin".





FTPServer	🛌 🤶 04:39
Settings	
Enable username and password	OFF
Username and password	
Port Number	2121
Select Directory	Internal Storage 🔺

Figure 132: FTP Server – Settings





RECORDER

 (\square)

GXV3240 Recorder application allows users to record audio and access recording files from call recording. There is no time limit on the recorder as long as there is enough space to save the recording file. Tap on

on the phone's menu or desktop to launch the Recorder application.

Normal Recorder


Normal recorder shows the recording files recorded using the Recorder application.

Recorder		🛃 🜵 💭 19:33
NORMAL	CALL	
201402271933 19:33:12	07461	Duration 00:03
201402271932 19:32:51	44103	Duration 00:07
201402271932 19:32:39	36909	Duration 00:02

Figure 133: Normal Recorder

To use the recorder app to record audio, tap on even the recorder.

1. Tap on 🕑 to start recording.

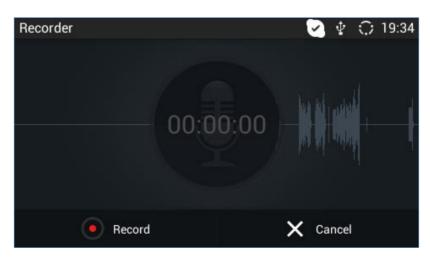







2. Tap on "Save" to end recording.

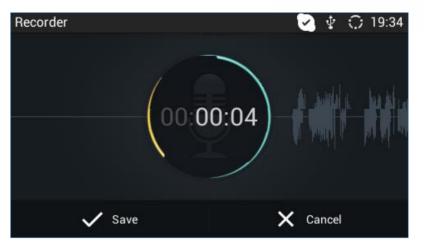


Figure 135: Normal Recorder - End Recording

3. The file will be saved and accessible under Recorder application "Normal" category. Tap on the recording file to play the recording.

Files operations

Users could long press on each file to select it then perform the following operations on the select file.

- Export: Choose this option to export the file to other storage destinations (SD card as example).
 Note: Files under "Call Category" that are recorded during calls, will be renamed (prefixed) with a timestamp once exported. For example, if the file name is 4005 then it will be exported as "4005-20170717133519".
- Lock/Unlock: Users could lock and unlock the file.
- Send: Make sure to enable Bluetooth on the phone in order to send the file to other devices.
- Rename: Click on this option in order to rename the file.
- Set as ringtone: Choose this option to set the recorded file as ringtone (a setup success message notification will popup once this is done).

Call Recorder

During an active call, users have the option to record the conversation. The recorded conversation can be retrieved here.





Talking	🥲 💷 📣 🔘 16:17	Recorder	😍 💷 🌵 🔿 19:37
Talking (3165)	1 call	NORMAL CALL	🚥 🤇 🗉
Call Duration: 00:00:06 Ben	+ Add Call	john 19:37:26	Duration 00:10
Start Recording Video On	San 3165 Ben		
Options			



Recorded Files Settings

User can specify whether to store the recorded file locally, or using a USB/SD Card by following these steps:

1. From the phone **Menu** click on **See 1** to open the recorder.

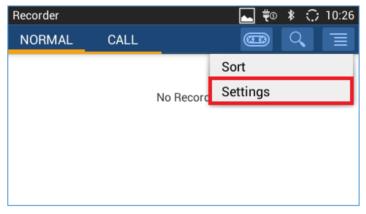


Figure 137: Recorder Settings

2. Click on **Settings** on the top right as shown above.

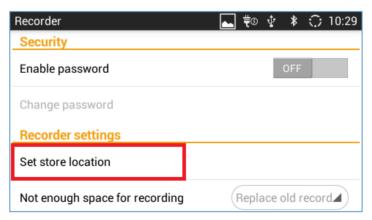


Figure 138: Recorder Storage





3. Click on **Set store location** and choose the USB/SD Card where to store the recorded files.

Note: The option **Set store location** will be shown only when a USB/SD Card is plugged.

Downloads

The Downloads application can be opened by tapping on U on the phone's menu or desktop. The files (such as PDF documents, pictures) downloaded from the browser will be stored in the internal storage and can be access from Downloads application.

Downloads - S	orte	🛨 🛌 🎟	*	🛜 03:44
 Today 				
⊻ ⊻	GXP2140_datasheet_ www.grandstream.com 1.11MB	english.pdf		3:44 AM
	Sort by size	e		

Figure 139: Downloads

- Tap on the file to open it.
- Tap on the checkbox to select the file. Then users could delete or share the file.
- Tap on "Sort by size" or "Sort by date" to sort the downloaded files.

IP Location

The IP Location application provides users with a tool to resolve the public IP address to the location. Tap on to \bigcirc on the phone's menu or desktop to launch the IP Location application.

In the IP Location application, users could simply enter the public IP address and then tap on **Search** to view the result. Based on the IP address provided, the following information will be given: **Country**, **Region**, **City**, **Latitude**, **Longitude**, **Time Zone** and **Weather Code**. This information is useful when configuring the phone to provide personalized settings based on user's location.





IP Location			18:38
IP Address	67.	110.250.152	Search
Cou	ntry	US	
Reg	gion	CALIFORNIA	
	City	YORBA LINDA	
Latit	tude	33.888630	
Longit	tude	-117.813110	
Timez	one	-07:00	
Weather C	ode	USCA1267	

Figure 140: GXV3240 Location

For example, in the above figure, the public IP address 8.8.8.8 is mapped to Mountain View in California, USA. The time zone is UTC-07:00 and the weather code is USA0746.

Diagnosis

The GXV3240 provides a built-in diagnosis application for users to troubleshoot hardware issues related to LCD, keypad, and touch screen, LED as well as extension board connection. Tap i on the phone's menu or desktop to launch Diagnosis application. The following figure shows the diagnosis menu. After selecting the option, users could follow the diagnosis instruction to troubleshoot the device.

LCD Diagnosis
LCD Off
Keypad Diagnosis
Touch Screen Diagnosis
LED Diagnosis
BLE Expansion Board Diagnosis

Figure 141: GXV3240 Diagnosis

Note: Users can start factory function app by dialing ***3424*, then tap on each item to perform the corresponding diagnosis. (Under web UI→Account→Call Settings, users need to set "Enable Call Features" to Yes, before dialing the diagnosis code).

The following table describes the options available under "Diagnosis" used for troubleshooting hardware issues:





	Table 10: Diagnosis troubleshooting tests	
LCD Diagnosis	Tests the colors of the LCD.	
LCD Off	Tests turning on/off the LCD.	
Keypad Diagnosis	Tests the available keypad buttons on the GXV3240	
Touch Screen Diagnosis	Tests the touch screen on all parts of the phone's LCD.	
LED Diagnosis	Tests all the LEDs on the GXV3240 phone.	
BLF expansion board diagnosis	Tests the connectivity and the LEDs of the expansion board	
Audio Loopback	Tests the GXV3240's MIC and speaker.	
Camera Test	Tests the camera sensor.	
Open Camera	Opens the camera and tests it.	
Certification Verification	Tests the certification for GXV3240 Video IP Phone for Android.	
System Info	 This part includes the GXV3240 phone's system Info, such as: MAC Address Total Memory Available Memory Android Version System Version Recovery Version U-boot Version TP Firmware Version Kernel Version Kernel Version CRE Version CRE Version Camera Serial Number DDR Serial Number TP Serial Number LCD Serial Number Wi-Fi Serial Number Wi-Fi Serial Number 	







CAMERA

The GXV3240 has built-in Camera to support taking pictures and recording videos. Users can also use the camera during SIP video calls as well as video calls via 3rd party applications such as Microsoft Lync. To

access Camera to take pictures and videos, tap on Camera icon on the desktop

on the desktop or phone's menu.

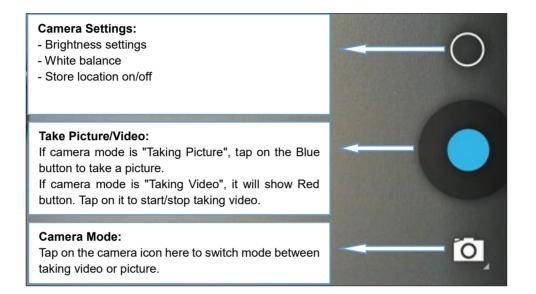



Take Picture

- 1. Select the camera mode as **O** to take picture.
- 2. Tap on the Blue button to take a picture.
- 3. The captured picture can be accessed under **FileManager** \rightarrow **Internal Storage** \rightarrow **DCIM** \rightarrow **Camera**.

Record Video

- 1. Select the camera mode as **I** to record video.
- 2. Tap on the Red button to start/stop recording.
- 3. The recorded video can be accessed under FileManager \rightarrow Internal Storage \rightarrow DCIM \rightarrow Camera.





Camera Settings

Tap on icon 🔘 to bring up camera settings.

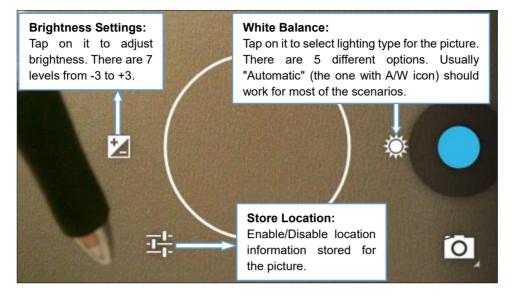


Figure 143: GXV3240 Camera Settings

Angle Adjustment

On the back of the GXV3240 camera, users could scroll the wheel up/down to adjust the camera angle. If

users scroll the camera all the way up until the icon Ω shows up on the status bar of the screen, the camera is turned off.





CONNECTING GXV3240 TO GDS3710 DOOR SYSTEM

The GXV3240 offers a powerful integration with GDS3710 Door System and allows users to open the door, initiates call to the GDS3710 and gets real time audio/video stream.

The GXV3240 can be connected with the GDS3710 in two different ways, either using peering mode (without a SIP server) or through a SIP server. For more details, please refer to following guide: http://www.grandstream.com/sites/default/files/Resources/Connecting the GDS3710 with GXV32XX C onfiguration Guide.pdf





MULTIMEDIA

Gallery

The GXV3240 has built-in Gallery application for users to take pictures/videos, view pictures and play videos from GXV3240 internal storage or USB/SD card storage. Users could also perform basic editing tasks on pictures and set them as wallpaper or picture for contacts. The pictures can be easily shared with friends in Gallery app by sending via Bluetooth and Email.

Note: The user has the ability to block image gallery options via GUI Customization Tool 3.9.0. *For more details about the Customization tool, please, refer to:*

http://www.grandstream.com/sites/default/files/Resources/gxv3240_gui_customization_guide_1.pdf

Tap on the phone's menu or desktop to launch the gallery application on the GXV3240.



Figure 144: GXV3240 Gallery

Gallery albums

The image related folders in the GXV3240 will be present in Gallery as thumbnails. Users can tap on the thumbnail to access the folder.

• View pictures

After accessing the album, slide left/right to view all the pictures. Users could select "Grid" or "Filmstrip" view mode to display the pictures. Tap on a specific picture to view the picture in full screen.

• Edit picture

When the picture is displayed in full screen, tap on the screen again. On the lower left corner, users

will see icon . Tap on it and users can crop/rotate/add effect to the picture.





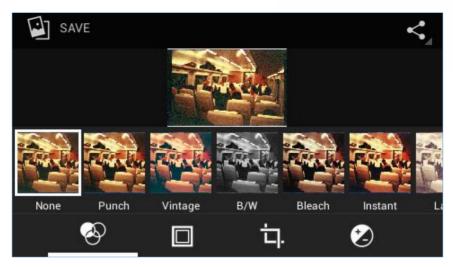


Figure 145: GXV3240 Gallery - Edit Picture

• Picture Options

When the picture is displayed in full screen, press the Menu button =. A list of options will be available for users to select, including "Delete", "Edit", "Rotate", "Crop" or "Set Picture as", etc.

A Richmon	Delete	
	Slideshow	
	Edit	
	Rotate left	2 011
16 ×	Rotate right	
	Сгор	
	Set picture as	
	Details	A STREET, STRE

Figure 146: GXV3240 Gallery - Picture Options

• Take picture/video

Tap on on the upper right of the Gallery to start taking pictures or videos using the GXV3240 built-in camera.

In the camera mode, users could tap on to take video and tap on to take picture on the bottom right.

• Select multiple pictures

Touch and press on one of the pictures for about 2 seconds until the picture is highlighted.





Tap on other pictures to select multiple pictures. On the upper right of the Gallery app, users can tap

on **S** to share the pictures, or tap on **1** to delete the selected pictures

• Share pictures

Tap on on the upper right of the picture to send the picture via Bluetooth or 3rd party applications.

Screensaver

User can set Screensaver from the local images, the default directory (Screensavers), or from Internal storage by navigating on the phone LCD menu under Menu→System Settings→Display→Daydream→Screensaver.

Screensaver	土 ≒⊚ 🗘 12:09
Path settings	
Use network images	
Network image path 192.168.5.121/Screensaver	
Use local images /mnt/sdcard/	
Preview Screensaver preview	
Timeset	

Figure 147: Use Local Images

Click on Use local images and select Internal Storage or Screensaver.

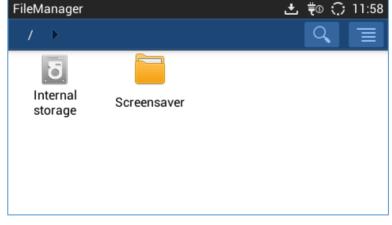


Figure 148: Local Images





Or the user can set a folder in a remote HTTP server to display images contained on it as screensaver.

Screensaver	⊾ 土 ቹ 🗘 12:09
Path settings	
Use network images	
Network image path 192.168.5.121/Screensaver	
Use local images /mnt/sdcard/	
Preview Screensaver preview	
Timeset	

Figure 149: Use Network images

Click on **Use network images** and set the path of the remote screensaver folder.

Screensaver		🛌 🕹	, 🗊 💭 12:09
Path settin	igs		
Use networl	Network image p	ath	
Network im 192.168.5.12	192.168.5.121/S	creensaver	
Use local in /mnt/sdcard/	Quant	014	
Preview Screensaver	Cancel	ОК	
Timeset			

Figure 150: Network Image Path

Music

The GXV3240 has built-in music player to support audio files in AAC, MP3, AMR, WAVE, MIDI and Vorbis

format. Tap on icon 🗾 on the phone's menu or desktop to launch Music application.

Play Music

- 1. Download music to have the music files ready in USB flash drive/SD card plugged into the GXV3240.
- 2. Open Music application.
- 3. Tap on E and select "Refresh". The music files will be displayed in the list.





Songs	📃 🔤 🖂 🕴 ┥× 🗘 18:29
J 🕂 🧿 🗒	Q ▶ Ξ
	Refresh
I knew you were trouble Unknown artist	Shuffle All
She Unknown artist	3:49
telephone Unknown artist	3:41
thousand miles	3:40

Figure 151: GXV3240 Music - Refresh Music List

4. Select a song and tap on **b** to play the song.

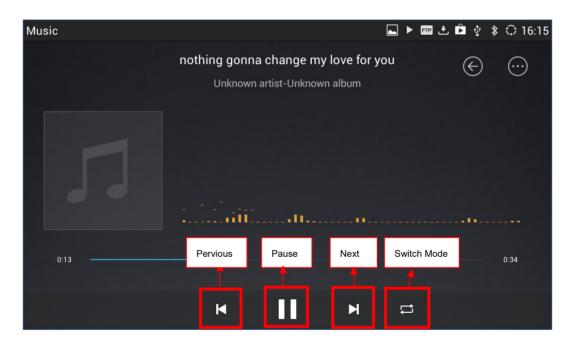


Figure 152: GXV3240 Music - Play a Song

Edit Music

- 1. In the music list, touch and press on one of the music file until the checkbox displays.
- 2. Tap on each and users will be able to "Play" the music, "Add To PlayList" and "Save As Ringtone".





Songs	🕒 🕨 🕷 🔺 🎲 10:27
1 Options	D
	Play
I knew you were trouble Unknown artist	Add To PlayList
She	Save As Ringtone
Unknown artist	
telephone Unknown artist	
thousand miles	~
Unknown artist	

Figure 153: GXV3240 Music - Options

Sort Music

On the top menu of the Music application, users can sort music by "Song", "Artist", "Album" and "Playlist".

Songs	Artists	Albums	Playlists			
Sor gs				≍ *	•× ⊖	18:43
		Ø		Q		
					4	song
	you were vn artist	trouble				3:39
She	vn artist					3:49
UNKNOV	vnartist					
telepho Unknov	ne vn artist					3:41
	nd miles vn artist					3:40

Figure 154: GXV3240 Music - Sort Songs

Search Music

- 1. Tap on 🚺 to access the lists of songs.





Create Playlist

- 1. Tap on 📑 to access Playlists.
- 2. Tap on + to create a new playlist.

Playlists		► FTP	∦ ∢ × 🗘 10:07
1 1	l Ø 🖪		
Recently add 4songs	Playlist Name		
New playlist Osong	My favourite		
	Cancel	ОК	

Figure 155: GXV3240 Music - Create Playlist

Edit Playlist

- 1. Tap on 📑 to access Playlists.
- 2. Touch and press one of the playlist for about 3 seconds to select it.
- 3. Press (I) to bring up options to play the playlist or rename the playlist.
- 4. Tap on 🔟 to delete the selected playlist.

Once the playlist is created, users can touch and press it for about 3 seconds.





BROSWER

GXV3240 browser could be used in a similar way as a PC-based web browser, i.e., open web pages,

bookmarks, view history, search and etc. Tap
on the phone's menu or desktop to launch the Browser application.

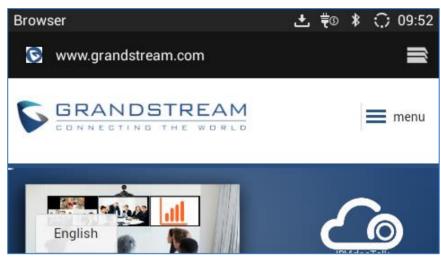


Figure 156: GXV3240 Web Browser

- Touch the screen and scroll up/down/left/right to view the web page.
- Double tap on the screen to zoom in/zoom out. Or use two fingers on the screen to pinch in or spreading out the page.
- Press the MENU button to access more options including bookmarks, share the page and etc.

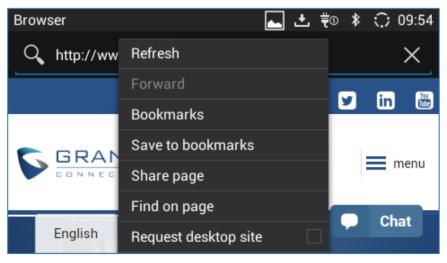


Figure 157: GXV3240 Browser Menu Options

• To open a new window, tap on **III** icon on the right side of the tab.





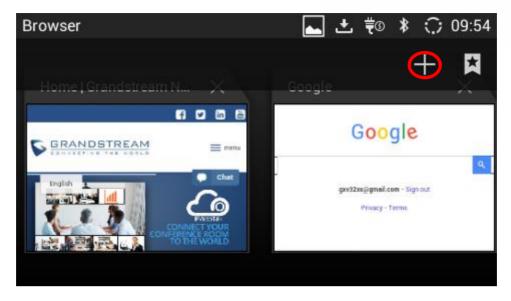


Figure 158: Open New Window in Browser

• To open **Bookmarks**, **History** and **Saved Pages**, tap the icon **i** on the upper right of the Browser and choose which pages you want to display from the drop menu.

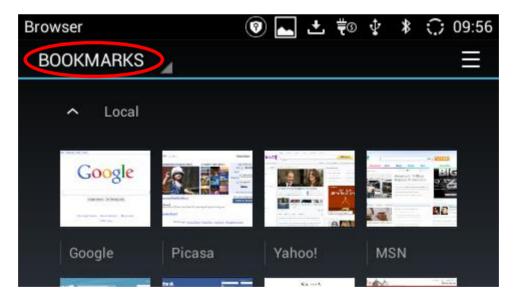


Figure 159: GXV3240 Web Browser-Bookmarks





RSS NEWS

Add RSS Widget

- 1. On the GXV3240 idle screen, press Settings button = and select "Edit Widgets".
- 2. A list of widgets will show on the bottom of the screen. Swipe left/right to find the "RSS News" widget.
- 3. Touch and drag it to the idle screen. Please make sure there is enough space on the idle screen to place the widget.

Use RSS Widget

On the RSS widget, users can tap on icon icon to refresh the page, scroll up/down to view the abstract of the news, and tap on the news to access the detailed content.



Figure 160: GXV3240 RSS News

RSS Widget Settings

On the RSS News widget, tap on 🗱 to access RSS News settings.

- **Update Interval:** Configure the interval to refresh the news. The valid range is from 10 minutes to 24 hours.
- **Page-turning Intervals:** Configure the page-turning speed on the widget when it displays different pages of news.
- **Subscribe:** Select the categories of the news you would like to display on the RSS News.
- **RSS Feed:** Tap on the URL field on the bottom of the screen and enter the link of a new RSS feed.

Then tap on icon 💷 to add it to the category of the RSS feed.





Settings	🗛 🎟 🌵 🗘 18:23
Update Interval	30 Mins. 🔺
Page-turning Intervals	10 Secs. 🔺
Subscribe Domestic News	
RSS Feed	0
http://	•

Figure 161: GXV3240 RSS News Settings

Weather

GXV3240 has a built-in Weather widget that provides weather information includes humidity, wind direction, wind speed (mph) and temperature in unit as configured by the users.

Add Weather Widget

- 1. On the GXV3240 idle screen, press Settings button (I) and select "Edit Widgets".
- 2. A list of widgets will show on the bottom of the screen. Swipe left/right to find the "Weather" widget.
- 3. Touch and drag it to the idle screen. Please make sure there is enough space on the idle screen to place the widget.

Use Weather Widget

On the Weather widget, tap on 🖸 to refresh the weather information. Users can also tap on the widget to access the settings.



Figure 162: GXV3240 Weather





Weather Settings

Weather Forecast FTP Ψ 19:07 LOS ANGELES cloudy becoming Humidity:52% fine Wind:SW,3mph Fri clear (night) partly cloudy Update Share Add City Settings

Tap on the weather widget to access settings. Users will see four softkeys on the bottom of the screen.

Figure 163: GXV3240 Weather Settings

- **"Update":** Tap to refresh the weather information.
- "Share": Tap to share the weather information with other users.
- "Add City": Tap to add city for the location you would like to check the weather.
- "Settings": Tap on configure temperature unit and update interval time.

Weather Forecast	🛌 🎟 🌵 🗘 19:19
Temperature Unit	O
Update Settings	
Automatic Update	
Update Interval	1Hours 🔺

Figure 164: GXV3240 Weather Update Settings





BS-IM&P

GXV3240 supports BroadWorks Instant Message and Presence (IM&P) feature. This service is a multitenant Instant Message & Presence service based on the Extensible Messaging and Presence Protocol (XMPP) and works with any XMPP compatible client. Please refer to the following link for more details about how to use BroadWorks IM&P on the GXV3240:

http://www.grandstream.com/sites/default/files/Resources/GXV_IM%26P_Guide.pdf





ACTIONURL

GXV3240 supports ActionURL module, and it is used to set the URL for various kinds of phone events on phone web GUI, and when the corresponding event occurs on the phone, phone will send the configured URL to SIP server. To use ActionURL module, users need to know the supported events in this module, and also added the dynamic variables of the supported events on phone web GUI. The dynamic variables of the supported event will be replaced by actual values of the phone, in order to notify the event to SIP server. Please refer to GXV3240 Administration Guide and ActionURL User Guide for the configuration details. http://www.grandstream.com/sites/default/files/Resources/ActionURL Guide.pdf





ACCESSIBILITY

GXV3240 supports Accessibility features, this feature is for the vision-impaired to use all of Android's features. **Accessibility** is available in the LCD under Settings:

S	ettings		÷	ULAN (ា	1:34
	<u>.</u>	Language & keyboard Language settings & keyboard settings				
	0 	Accounts Account data sync				
	\bigcirc	Date & time Date, timezone, time & date format settings				
	ţţ	Accessibility Accessibility settings				
	(j)	About phone Account status, network status & system information				
	Х	Advanced settings Account advanced settings, upgrade, syslog & factory reset				
	0	Reboot Reboot your phone				

Figure 165: Accessibility Settings

User can install multiple Accessibility apps from Google Playstore, for instance users can install Google talkback app and activate it from below Accessibility menu:

Accessibility	🛌 🚥 😳 15:59
Services TalkBack	
On System	
Magnification gestures On	
Large text	
Speak passwords	
Text-to-speech output	
Touch & hold delay Long	

Figure 166: Talkback





Following options are available in the Accessibility menu:

- Services: Shows all installed accessibility services in the GXV3240, for instance Talkback Service.
- System:
 - **Magnification gestures:** This allows user to zoom in and out by triple-tapping the screen when enabled.
 - Large text: This feature will make the apps names displayed in a larger font.
 - **Speak passwords:** When this setting is on, password characters are announced audibly like any other typed characters.
 - **Text-to-speech output:** This allows users to type in content and have it read back by the phone. User can also select the speech rate and the language used.
 - **Touch & hold delay:** This will change the duration of time that user must hold for any press and hold actions. For those with dexterity issues, having a longer delay can help while navigating their device.





PNP

The GXV3240 has built in PNP (Plug and Play) application to mass provision for other Grandstream phone clients. The PNP feature is for other phones to be able to find the configuration path and download their configuration settings with little or no configurations from GXV3240. It gives the GXV3240 phone accessibility to many phones' settings and features that can be configured, making it unnecessary to configure these settings on other phones themselves.

Set Up PNP Application

It needs to configure the Account 1's setting properly before implementing the PNP feature on GXV3240.

- 1. Check the Account Active box for Account 1.
- 2. In Account 1's SIP setting page, disable the Validate Incoming SIP Messages feature.
- 3. In Account 1's SIP setting page, set the SIP transport protocol to UDP.
- 4. In the Account 1's SIP setting page, do not use 5060 as the Local SIP Port. This setting will be overridden to 0 automatically when the PNP feature is enabled. The port number with 0 refers the port number will be random.

Enable PNP Feature

After the settings above, end users can enable the PNP feature for GXV3240. It can be enabled from the web page or from the LCD screen.

Enable from Web Page

- 1. Log in the GXV3240 web page, browse to Maintenance \rightarrow Upgrade.
- 2. Check the Enable PNP Feature box.
- 3. In the PNP URL box, type the URL path for the saved configuration file with protocol identifier. For example, <u>http://192.168.1.200/config</u>. The protocol identifier can be selected from tftp, http, and https.
- 4. GXV3240 supports the built-in httpd server feature. End users can save the config file in the GXV3240 device and it can be set as a file server transport the files to another phone client. If end user needs this feature, the config file should be saved in the directory */Internal Storage/pnp*. And the PNP URL should be point to the pnp directory. For instance, if a user wants to set his GXV3240 as a HTTP file server, whose IP address is 192.168.1.100, and the config file is saved in the directory */Local Storage/pnp*, it needs to enter <u>http://192.168.1.100/pnp</u>. If it needs to transport the file via HTTPS, it needs to set the Access Method to HTTPS under the page of Maintenance →Web/SSH Access.
- 5. Then save the setting and reboot the unit. If the Account 1's Local SIP port does not be set to 0, the phone system will pop up a prompt window and it writes "The local SIP port is 5060 in your account, save the operation will change the port to the random one, sure to change?" Click OK to change to port from 5060 to 0 by force.





Enable from LCD

- 1. On the LCD screen, tap the icon to enter the PNP application.
- 2. Tap the Setting icon it the upper right corner of the screen to enter the PNP-Settings page.
- 3. In the Settings page, switch the PNP feature on and switch the 3CX Auto Provision off. Type the URL to the Configuration file path in the correct format. And if the GXV3240 needs to be set as a file server, it needs to load the configuration file to the directory /Local Storage/pnp via the Import local configuration file.
- 4. Save the setting and reboot the device.

PNP-Settings	📔 🛌 茕© 🔤 🗘 1:52 PM
Settings	
PNP Reboot to take effect	OFF
3CX Auto Provision Reboot to take effect	ON
PNP URL	
🗙 Cancel	🗸 Save

Figure 167: GXV3240 PNP Settings

Note: When PNP feature is enabled, a notification icon will be shown on LCD top status bar.

Use PNP Feature

After setting up the PNP feature on GXV3240, the other client phone units will multicast the SIP SUBSCRIBE message while booting up if their 3CX Auto Provision feature has been enabled. Then the client phone units configure server path and transportation protocol will be provisioned by the SIP NOTIFY message from the GXV3240 device. After then the client phone units will download the config file from the provisioned URI.





CONNECT TO NETWORK AND DEVICES

The GXV3240 supports a variety of network connections (Ethernet, Wi-Fi) and device connections, including EHS headset (Plantronics), USB, SD card and Bluetooth device. Users can connect the GXV3240 to transfer files from/to the GXV3240 using a USB connection, SD card or Bluetooth.

Ethernet

Ethernet connection is turned on as DHCP by default. If you would like to use Ethernet connection for network access, please make sure the Ethernet cable is plugged in to the LAN port on the back of the GXV3240. To configure Ethernet settings on GXV3240 LCD:

- 1. Go to GXV3240's Settings application → Wireless & Network → Ethernet Settings.
- 2. Touch **IPv4 settings**.
- 3. Tap on "Address Type" to select DHCP, Static IP or PPPoE as the address type.
 - For DHCP, save the setting and the GXV3240 should be able to get IP address from the DHCP server in the network.
 - For static IP, enter IP Address, Subnet Mask, Default Gateway, DNS Server and Alternative DNS server for the GXV3240 to correctly connect to network.
 - For PPPoE, enter PPPoE account ID and password so the GXV3240 can get IP address from the PPPoE server.

Wi-Fi

WI-FI is supported and built-in on the GXV3240. GXV3240 can be connected to network if Wi-Fi is available within the area.

Turn On/Off Wi-Fi

- 1. Go to GXV3240's Settings.
- 2. Tap on Wireless & Network.
- 3. Check or uncheck the option for Wi-Fi.
- 4. Or, users could open the top status bar \rightarrow System Settings and tap on WI-FI icon \Im to turn it on/off.

Add Wi-Fi Networks

- 1. Once Wi-Fi is turned on, GXV3240 will automatically start the scanning within the range.
- 2. Go to GXV3240's Settings.
- 3. Tap on Wireless & Network.
- 4. Tap on Wi-Fi Settings.
- 5. A list of Wi-Fi networks will be displayed as scanning result. Tap on the SSID and enter the correct password information to connect to the selected Wi-Fi network.
- 6. The phone will start connecting to the Wi-Fi. The status bar will show Wi-Fi signal strength.





7. Once it's added and the password is remembered, the GXV3240 will connect to it again when the SSID is within the range.

Wi-Fi settings			🛌 🕱 18:11
AdminIT Secured with	LA_Guest		((îª
LA_EAP_TL Secured with	Security		
LA_Guest Secured with	WPA2 PSK Password		
LA_Lab Secured with			
DSITIGER Secured with	Cancel	Connect	((;

Figure 168: GXV3240 Connect to Wi-Fi

8. The previous steps allow the GXV3240 to connect the WiFi network with DHCP setting by default. If it needs to be connected the WiFi with static IP or PPPoE setting, please scroll down the setting window and tap to check the "Show advanced options". Then the window will show up the IP settings at the bottom. If Static IP is selected, the system will require end user to input IP address, Gateway, Network prefix length and DNS 1 and DNS 2 addresses. If PPPoE is selected, the system will require end user to input PPPoE account ID and password.

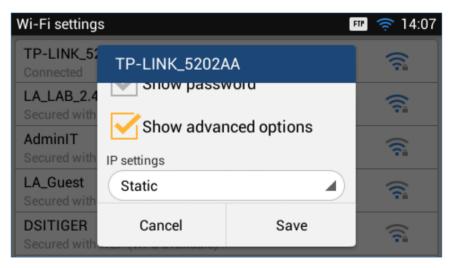


Figure 169: GXV3240 Connect to Wi-Fi-Show Advanced Options

9. If there is need to modify the saved Wi-Fi network setting, the end user should tap and long press the SSID bar in the Wi-Fi setting page. The system will pop up a prompt and then user needs to tap the "Modify Network". Then the phone system will pop up a new window to allow user to check the Wi-Fi parameters and change the setting by checking the "Show advanced options" at the bottom.





Wi-Fi Settings Shortcut

((1-	*	(্র
Wi-Fi	Bluetooth	DND	Voice	Screen off	Enabled
4	annel: O n				dant
India ala	annel: 🔿 🛛 R	J9 headse	• 6	USB Head	deat

User can enter the Wi-Fi settings by sliding the Status Bar, then long Press on the Wi-Fi icon.

Figure 170: Wi-Fi Settings Shortcut

For more information about how to use Wi-Fi on the GXV3240, please refer to the link below: http://www.grandstream.com/sites/default/files/Resources/GXV3240 wifi guide 0.pdf

Bluetooth

Bluetooth is a proprietary, open wireless technology standard for exchanging data over short distances from fixed and mobile devices, creating personal area networks with high levels of security. The GXV3240 supports Bluetooth Class 2, version 4.0 + EDR. Users could use Bluetooth to transfer files, share contact information with other Bluetooth portable devices, use Bluetooth headset for making calls, switch calls to the GXV3240 from mobile devices using Bluetooth hands-free profile, and listen to media (music or other audio output) from the GXV3240.

To connect to a Bluetooth device, turn on GXV3240's Bluetooth radio first. The first time when using a new Bluetooth device with the GXV3240, "pair" the device with GXV3240 so that both devices know how to connect securely to each other. After that, users could simply connect to a paired device. Turn off Bluetooth if it's not used.

Bluetooth related settings are under GXV3240's Settings→Wireless & Network.

Turn On/Off Bluetooth

- 1. Go to GXV3240's **Settings**.
- 2. Tap on Wireless & Network.
- 3. Check or uncheck the option for **Bluetooth**.

Or, users could open the top status bar→System Settings and tap on Bluetooth icon

to turn it on/off.





Change Bluetooth Device Name

The GXV3240 uses "GXV3240" as Bluetooth device name by default. The device name will be visible to other devices when connecting them. Follow the steps below to change the name:

- 1. Go to GXV3240's Settings.
- 2. Turn on Bluetooth.
- 3. Select Wireless & Network→Bluetooth settings.
- 4. Press Menu button (I) and tap on "Rename phone".
- 5. Enter a name and tap on "Done".

Pair GXV3240 with a Bluetooth Device

Before connecting GXV3240 with other Bluetooth device, users must pair them first. They will stay paired afterwards unless they are unpaired.

- 1. Go to GXV3240's Settings.
- 2. Select Wireless & Network and turn on Bluetooth.
- 3. Tap on **Bluetooth settings**.
- 4. Tap on the Bluetooth device to make it visible to all nearly Bluetooth devices.
- 5. The GXV3240 scans and displays the IDs of all available Bluetooth devices in range. If the device you would like to pair with does not show up in the list, ensure that the other device is turned on and set to be discoverable.
- 6. If the GXV3240 stops scanning before the other device is ready, press Menu button () and select "Search for devices".
- 7. Once the Bluetooth device shows up in the result, tap on it to start pairing. Confirm the passkey in the prompted message (if any). Or if passcode is required, please refer to the device's documentation or other procedures to obtain the passcode.

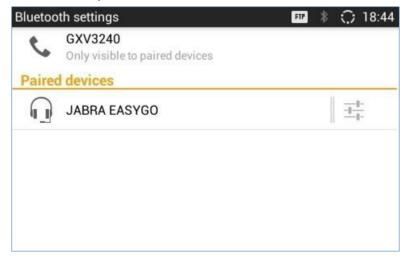


Figure 171: GXV3240 Bluetooth - Paired Device





Unpair a Bluetooth Device

- 1. In the Bluetooth settings, tap on the Bluetooth device.
- 2. Tap on Unpair.

Bluetooth Settings Shortcut

User can enter the Bluetooth settings by sliding the Status Bar, then long Press on the Bluetooth icon.

08/01/20	16 MONDAY			ŧ® ≯	09:45
(; wi-Fi ♥	Bluetooth	C DND	الله المعالم ال المعالم المعالم	Screen off	Enabled
Media channel: RJ9 headset USB Headset				dset	
Notification		=	System sett	ings	

Figure 172: Bluetooth Settings Shortcut

For more information about Bluetooth feature on the GXV3240, please refer to the link below: <u>http://www.grandstream.com/sites/default/files/Resources/GXV3240_bluetooth_guide_1.pdf</u>

EHS Headset

The GXV3240 supports normal RJ9 headset and EHS headset (Plantronics EHS headsets only). To use EHS headset:

- 1. Go to the GXV3240 web GUI**→Maintenance→Device Manager**: Headset Type. Select "Plantronics EHS" and reboot the phone to take effect.
- Connect EHS Headset to GXV3240. Insert headset connector into the RJ9 headset port on the back of GXV3240.
- 3. To switch to headset mode, press headset button on the GXV3240. A headset icon will show on the GXV3240 status bar. There are two different headset mode for users to select from web GUI→Maintenance→Device Manager: Headset Key Mode. After selecting the desired mode, save the change and reboot the phone to take effect.

Please go to <u>http://www.grandstream.com/support</u> and refer to "GXV3240 Administration Guide" for the key mode details.





If "Disable RJ9 Headset Auto Detect" is enabled, RJ9 headset will not be detected and the icon will not appear on the LCD, users need to click the handset icon during the call to switch to RJ9 headset.

USB Headset

The GXV3240 supports USB Headset, once the headset plugged, it will be detected automatically, and the following icon will be shown on the top right of the status bar, this means a USB headset is connected.

					A 🗘 13:05
-0-	192.168	.40.69			
APK Info		000 gs 000			
	Settings	Conference	FileManager	MPK MPK	
	٩.	<u>م</u>		£	

Figure 173: USB Headset

When user enters the dialing screen, media channel will switch automatically to USB headset, and a second icon will be displayed on the top right of the status bar meaning that the USB headset is used for speaking.



Figure 174: USB Headset Used for Speaking

USB

The GXV3240 supports USB connection with USB storage devices. To connect and access USB storage device:

- 1. Insert an USB storage device into USB port at the back of the GXV3240.
- 2. It will take a few seconds for the GXV3240 to prepare the connection. Then the USB storage icon will show on the status bar.
- 3. To access USB storage, go to GXV3240 MENU→**File Manager**→**USB Disk**. Tap on it to access and manage your data.





SD Card

- 1. Insert your SD card into SD Card slot at the back of GXV3240. Please make sure the SD Card is inserted with right direction on the GXV3240 as indicated on the SD card slot.
- 2. It will take a few seconds for the GXV3240 to prepare the connection. Then the SD Card icon ^{III} will show on the status bar.
- 3. To access SD Card, go to GXV3240 MENU→File Manager→sdcard. Tap on it to manage your data.

HDMI Device

- 1. Plug one end of the mini HDMI cable into the mini HDMI port on the GXV3240.
- 2. Plug the other end of the mini HDMI cable into the HDMI port on the LCD display or TV. User needs to adjust the resolution on the LCD display or TV for proper display.
- 3. On the GXV3240, go to Settings→Display. Make sure the HDMI is turned on. A HDMI icon will show

on the top status bar

Display	🛌 ቹ 🏧 💭 06:49
Screen timeout Adjust the delay before the screen automatically	3 Mins. 🔺
Screensaver timeout Screensaver timeout settings	2 Mins.
Daydream	
Landscape screen Set all screens landscaped	OFF
HDMI control Sho	w remote screen

Figure 175: Settings→Display→HDMI

4. In LCD Settings→Display, tap on "HDMI control", a window with selections will be shown on the screen. It allows end users to set the HDMI output mode from "Close HDMI output", "HDMI display synchronization with LCD", "and Show remote screen". If "Close HDMI output" is selected, the HDMI output feature will be turned off. If "HDMI display synchronization with LCD" is selected, the pictures displayed on the remote HDMI device will always be same as the GXV3240's LCD display. If "Show remote screen" is selected, the remote HDMI device will display the same picture with the phone's LCD screen unless displaying the remote side's video in full size mode during a video call.






Display		≑ ⊛ ≣ 🗘 06:49
Screen time		3 Mins.
Adjust the del	HDMI control	
Screensave Screensaver		Mins.
Daydream	Close HDMI output	
	HDMI display synchronization with LCD	
Set all screen	Show remote screen	F
HDMI contr		w remote screen

Figure 176: Settings→Display→HDMI Control

5. The end user can select the audio channel while the HDMI device is connected. In LCD **Settings→Sound**, there is an audio channel setting "HDMI". If it switched on, the audio channel will be use the HDMI device. Otherwise, the audio channel will be used locally.

Sound	📔 🛱⊚ 🔤 🎲 1:49 PM
General	
Silent mode	OFF
Touch sounds	ON
HDMI	ON
Volumes	
Incoming collo	







EXPERIENCING THE GXV3240 APPLICATION PHONE

Please visit our website: <u>http://www.grandstream.com</u> to receive the most up- to-date updates on firmware releases, additional features, FAQs, documentation and news on new products.

We encourage you to browse our <u>product related documentation</u>, <u>FAQs</u> and <u>User and Developer Forum</u> for answers to your general questions. If you have purchased our products through a Grandstream Certified Partner or Reseller, please contact them directly for immediate support.

Our technical support staff is trained and ready to answer all of your questions. Contact a technical support member or <u>submit a trouble ticket online</u> to receive in-depth support.

Thank you again for purchasing Grandstream Enterprise Application phone, it will be sure to bring convenience and color to both your business and personal life.

* Android is a trademark of Google Inc.

* Skype and Lync are Registered Trademarks of Microsoft Corporation.



HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

