

MV-372 Mobile VoIP



2 Channels VoIP GSM Gateway

MV-372 is a 2 channels VoIP GSM Gateway for call termination (VoIP to GSM) and origination (GSM to VoIP). It is SIP based and compatible with Asterisk. It can enable to make 2 calls simultaneously from IP phones to GSM networks and GSM network to IP phone.

Major Function

- VoIP(SIP) 、 GSM conversion.(MV-372)
- VoIP(SIP) 、 CDMA conversion.(MV-372C)
- 50 sets of LAN --> MOBILE routes setting ,
50 sets of MOBILE --> LAN routes setting.
- Voice response for setting and status(dial in from mobile).
- For call termination (VoIP to GSM) and origination (GSM to VoIP).
- Standard SIP(RFC2543 , RFC3261) protocol , communicates with other gateway or PC
- All functions can be set on web.

How to stack up?






Specification

- Protocols : SIP (RFC2543 , RFC3261)
- TCP/IP : IP/TCP/UDP/RTP/RTCP/ , CMP/ARP/RARP/SNTP , DHCP/DNS Client , IEEE802.1P/Q , ToS/DiffServ , NAT Traversal , STUN , uPnP , IP Assignment , Static IP , DHCP , PPPoE
- Codec : G.711 u-Law , G.711 a-Law , G.723.1 (5.3k) , G.723.1 (6.3k) , G.729A , G.729A/B
Voice Quality , VAD , CNG , AEC , LEC , Packet loss
- CDMA (MV-372C) : 800MHz CDMA , Supports cdma2000 1xRTT Air Interface , Backward compatibility from IS-2000 to IS-95A/B , Support Voice for both 13k QCELP and EVRC
Supports both full rate and 1/8 gating on the reverse link
- GSM (MV-372) : Dual band:900/1800 MHZ
Tri band:900/1800/1900MHZ
Quad band:900/1800/1900/850MHZ

PORTech Communications Inc.

MV-372 Mobile VoIP

***Enable to make 2 calls simultaneously**

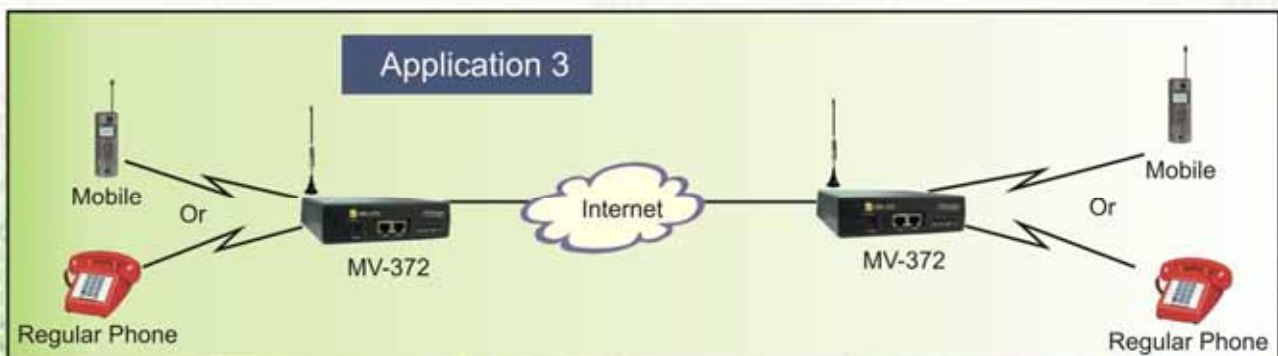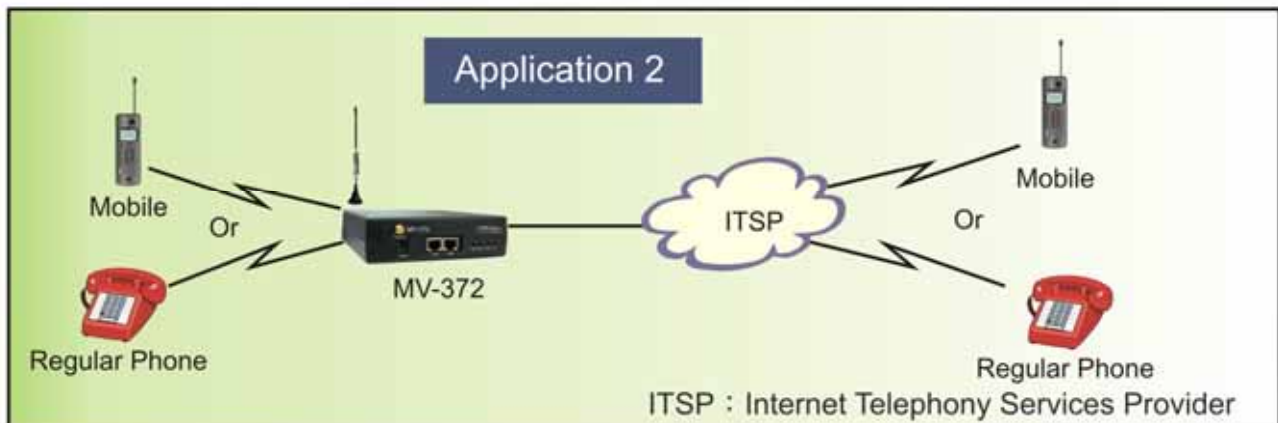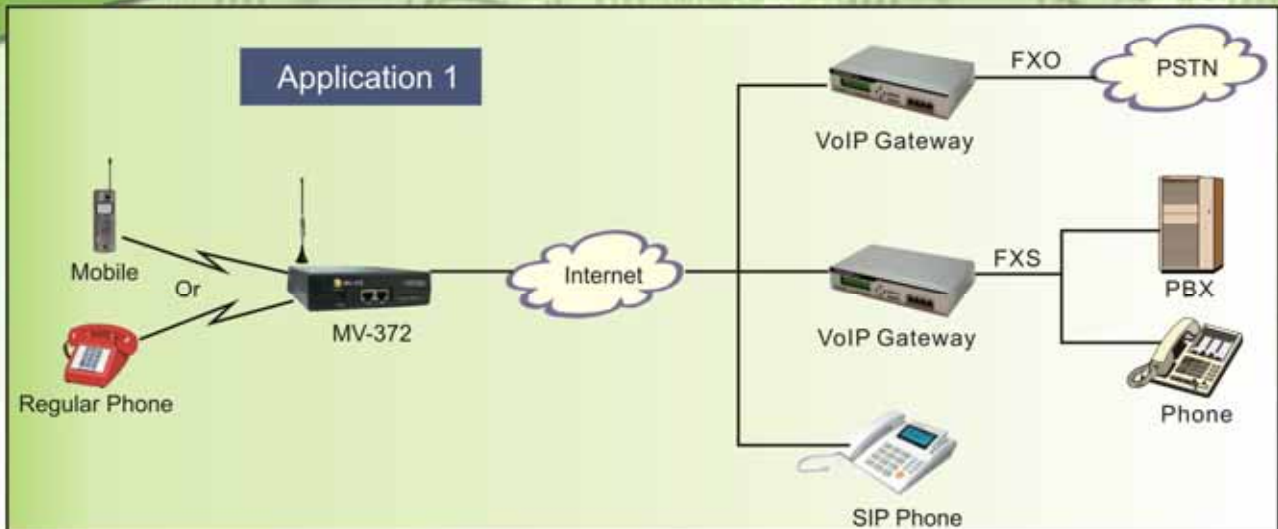

PORTech Communications Inc.

150, Shiang Shung North Road., Taichung, Taiwan 403, R.O.C
 TEL: 886-4-23058000 FAX: 886-4-23022596
 E-mail: info@portech.com.tw
 Skype Account: portech
 http://www.portech.com.tw

VolPon www.voipon.co.uk sales@voipon.co.uk Tel: +44 (0)1245 808195 Fax: +44 (0)1245 808299