

The Sonus SBC 1000™ Session Border Controller


Sonus session border controllers (SBCs) help the world's leading enterprises reduce communications costs, enable Unified Communications, and protect their networks against IP-based attacks. Now small businesses and branch offices can enjoy the same industry-leading SBC technology in a right-sized appliance designed specifically for their networks. The SBC 1000 is an advanced SBC built for smaller enterprise networks which delivers robust security, high availability and proven interoperability with leading business solutions like Microsoft Lync Server. The Sonus SBC 1000 also features built-in Survivable Branch Appliance (SBA) functionality, so calls go through even if your wide area network goes down.

System Capabilities

- Sessions
 - Maximum number of SIP-to-SIP calls: 160
 - Maximum number of TDM-to-SIP calls: 84
 - Maximum number of total concurrent calls: 160
 - Maximum number of transcoded sessions (based upon codec type): 120
- Call Set-Up
 - Maximum call set-up rate: 4 cps
- Registrations
 - Maximum number of registered users: 600
- Encryption
 - Maximum number of TLS sessions: 160
 - Maximum number of SRTP sessions: 160
- Business Continuity
 - Bypass relays (PRI-PRI, FXS-FXO) for emergency calls (e.g., 911)
 - PSTN fallback when WAN is down
 - Survivable Branch Appliance (SBA) for Lync
 - Resilient Branch Appliance for Lync survivability over 3G/4G or secondary IP connection such as DSL
 - Multiple SIP trunking service provider support for redundancy
 - Site survivability through built-in SIP registrar
 - ITSP E911 Support

Management Capabilities

- Operations, Administration and Management
 - Single, secure, web-based GUI
 - REST-based programmatic interface to remotely manage multiple SBC 1000s
 - SNMP v2/v2c for comprehensive network management using third-party management systems

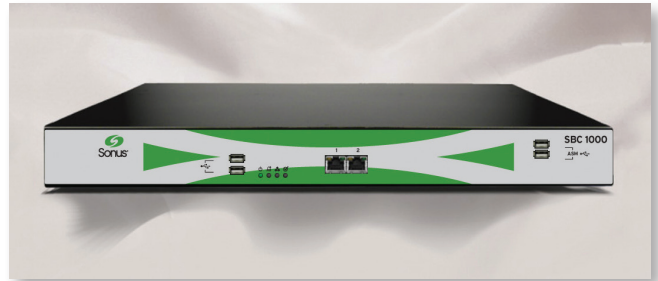

The Sonus SBC 1000

- Configuration backup and restore; Configuration upload from one site to another; Partial configuration import/export through REST
- CDR reporting
- Microsoft SCOM support
- Syslogs for troubleshooting, with support for free Sonus LX syslog server and log parser tool
- Historical Stats and TCAs
- Authentication
 - Local user (User name/password)
 - Active Directory
 - RADIUS

Media Services

- G.711 (64 kbps – A-law, Mu-law), G.723.1 (5.3 kbps, 6.3 kbps), G.726 (32 kbps), G.729A/B (8 kbps)
- G.711 to T.38 transcoding for SIP trunks
- T.38 with CNG tone detection
- DTMF/RFC4733; Inband DTMF
- Voice Activity Detection (VAD)
- G.168 Echo Cancellation with standard 128 ms tail length
- Private-side NAT traversal
- Comfort Noise Generation and packet loss concealment
- Automatic call type detection – voice, fax or modem
- Music on Hold
- Generate call progress tones – ringback, busy, re-order
- RTP inactivity monitoring (dead call detection)
- RTP Proxy
- RTCP/RTCP-XR
- Caller ID Support

Signaling

- Maximum number of signaling groups: 100
- TDM Signaling (ISDN): AT&T 4ESS/5ESS, Nortel DMS-100, Euro ISDN (ETSI 300-102), QSIG, NTT InsNet (Japan), ANSI National ISDN-2 (NI-2)
- TDM Signaling (CAS): T1 CAS (E&M, Loop start); E1 CAS (R2)
- Back-to-Back User Agent (B2BUA)
- SIP (UDP/TCP/TLS) to/from SIP (UDP/TCP/TLS)
- SIP (UDP/TCP/TLS) to/from CAS/PRI/BRI/FXS/FXO
- CAS/PRI/BRI/FXS/FXO to/from CAS/PRI/BRI/FXS/FXO
- SIP Message Manipulation (SMM)
- Private-side NAT traversal

Protocol Support

- | | |
|---|-----------------------------|
| • SNMP | • DNS |
| • NTP | • DHCP server |
| • Https | • DHCP client |
| • RIP, OSPF as dynamic IP routing protocols | • Asynchronous DNS for SIP |
| • RTP/RTCP, SRTP/SRTCP | • NAT |
| • UDP, TCP, TLS | • Support for Reason Header |

Routing/Policy

- Maximum number of call route entries: 1,000
- Active Directory/LDAP-based call routing
- Routing based on quality metrics
- Least cost routing
 - Event-based action set
- On-board call forking (up to eight end points)
- Supplementary services
 - Call hold
 - Call transfer (blind & assisted)
 - Call forward
- Embedded policy/routing engine
- Optional centralized policy/routing via Sonus Centralized Policy Server (PSX Server) using SIP
- Screening, blocking, routing, presentation, call type filters
- Route prioritization
- Leading digit routing; International routing; URI-based routing
- Digit manipulation (name/number manipulation using regular expression and Active Directory lookup)
- SIP routing
 - Based on source and destination IP address
 - Fully Qualified Domain Name (FQDN)
- Detect proxy failure and route to alternate paths

- Re-route on failure based on full Cause Code re-routing on T1/E1 trunks
- Lync E911 support; SIP/PIDF-LO passthrough and ELIN Gateway

Security

- TLS for signaling encryption
- Secure RTP (SRTP) for media encryption
- Built-in VoIP firewall
- Windows Firewall for Application Solution Module to secure SBA function of Lync
- Topology hiding; User privacy
- Prevention of Denial-of-Service (DoS) and Distributed DoS (DDoS) attacks
- Dialed Number Identification Service (DNIS), Calling Line Identification (CLID), Call type pre-authentication
- Traffic separation (VLAN interface separation)
- Line rate malformed packet protection
- Access Control Lists (ACLs)
- IPsec VPN tunnel

Quality of Service (QoS)

- Microsoft Lync quality of experience (QoE) monitoring
 - Round Trip Delay
 - Jitter (max, mean)
 - Packet Loss (max, mean)
 - Packet Loss Rate (max, mean)
 - Burst (density, gap density)
 - MOS-LQ, MOS-CQ
 - Signal/Noise Level
- Bandwidth management
- Call Admission Control (CAC) (deny excessive calls based on static configuration for bandwidth management)
- P-time mediation for rate limiting
- Per-call statistics
- Diffserv/DSCP marking

Packet Network Time Source

- Network Time Protocol (NTP) per RFC1708

Server Modules

Memory

- 2 GB of DDR3 with non-ECC (Error-Correcting Code) for <25 users
- 4 GB of DDR3 with ECC (Error-Correcting Code) for >25 users

CPU

- Intel® Atom™ D525 processor for <25 users
- Intel® Celeron™ P4505 1.8 GHz processor for >25 users

Capabilities

- Certified as a Microsoft Lync 2010 and Lync 2013 Survivable Branch Appliance
- Certified as Microsoft Lync EGW, Microsoft Lync SBC, Microsoft Exchange UM
- Maximum number of concurrent calls deployed as Microsoft Lync 2010 and Lync 2013 Survivable Branch Appliance with Intel® Atom™ D525 processor: 40
- Maximum number of concurrent calls deployed as Microsoft Lync 2010 and Lync 2013 Survivable Branch Appliance with Intel® Celeron™ P4505 1.8 GHz processor: 100

Additional Hardware Specifications

Front Panel

- Status Indicators Front Panel LEDs
 - Power
 - Alarm
 - Peer Node
 - Ready
- Dual USB 2.0 interface for main SBC board
- Additional dual USB 2.0 ports for ASM (optional)
- WAN and LAN Interfaces
 - 2 x 10/100/1000 BASE-T Ethernet ports with VLAN support
 - Auto-MDIX

Rear Panel

- Physical PSTN Interfaces
 - Up to 2 T1/E1 CAS/PRI digital ports
 - Up to 12 BRI digital ports
 - Up to 24 FXS (Foreign eXchange Station) analog ports
 - Up to 24 globally compliant FXO (Foreign eXchange Office) analog ports

Chassis

- 1U, rack mount
- Inches: 17.5" Wide x 1.75" High x 12" Deep
- Centimeters: 44.4 Wide x 4.4 High x 30.5 Deep

Chassis Mounting Options

- EIA-standard 19" equipment rack with 2 or 4 posts

AC Power Option

- Input Voltage: 100-240 VAC nominal, auto-switching, 47-63 Hz
- AC Maximum Input Current: 1.25A at 115 VAC; 0.63A at 230 VAC
- AC Input Voltage Range (Nominal): 100-127 VAC and 200-240 VAC
- Max Power Consumption: 144 W

Cooling System

- Internal forced convection

Weight Maximum Fully Populated

- 12.5 lbs. (5.67 kg)

Environmental

- 5 to 40° C Operating
- -40 to 70° C Storage
- 5 to 85% Non-Condensing Operating Humidity

Sonus North American Headquarters

4 Technology Park Drive
Westford, MA 01886
U.S.A.
Tel: +1-855-GO-SONUS

Sonus APAC Headquarters

1 Fullerton Road #02-01
One Fullerton
Singapore 049213
Singapore
Tel: +65-68325589

Sonus EMEA Headquarters

Edison House
Edison Road
Dorcan, Swindon
Wiltshire
SN3 5JX
Tel: +44-0-1793-601-400

To learn more, call Sonus at 855-GO-SONUS
or visit us online at www.sonus.net

Microsoft Partner
Gold Communications

Voice Unified Communications
Business Productivity Solutions
Midmarket Solution Provider

The content in this document is for informational purposes only and is subject to change by Sonus Networks without notice. While reasonable efforts have been made in the preparation of this publication to assure its accuracy, Sonus Networks assumes no liability resulting from technical or editorial errors or omissions, or for any damages resulting from the use of this information. Unless specifically included in a written agreement with Sonus Networks, Sonus Networks has no obligation to develop or deliver any future release or upgrade or any feature, enhancement or function.

Copyright © 2014 Sonus Networks, Inc. All rights reserved. Sonus is a registered trademark of Sonus Networks, Inc. All other trademarks, service marks, registered trademarks or registered service marks may be the property of their respective owners.

