


## Extend the range of your DECT Phone Easy and Simple

- Up to 6 repeaters per base station
- 2 simultaneous calls per repeater
- Automatic registration method
- 2 internal antennas
- Supports W52P



The Yealink DECT repeater can be deployed when there is a desire to extend the range of the W52P, The repeater can also be utilised wherever there is a need to increase limited coverage or improve reception in remote areas.

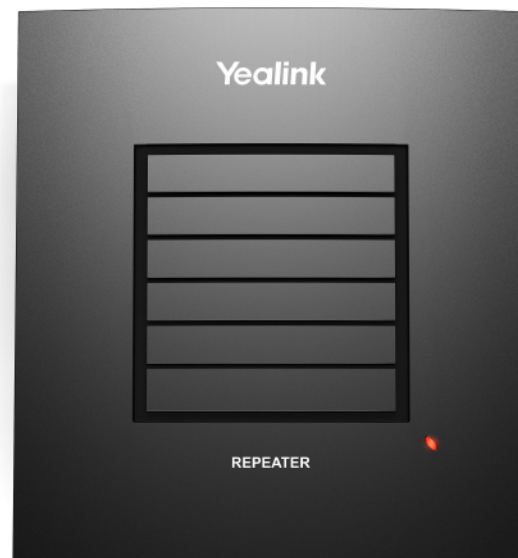

Normal Range



Extended Range

Up to 6 repeaters per base station

## GENERAL FEATURES

- > Worldwide DECT support
- > Extending the DECT coverage
- > Supports automatic handover of calls between cells
- > Handling of 2 active calls simultaneously
- > Up to 6 repeaters per base station
- > Automatic registration method
- > Manual registration method

## FREQUENCY/COVERAGE

- > Frequency bands coverage:  
DECT, EU/AU/NZ & US/CA
- > Up to 50m indoor and 300m outdoor
- > Receiver sensitivity: -92dBm
- > 2 internal omni-directional antennas
- > Support for external antennas using SMB connectors

## DESIGN/SIZE

- > Up to 2 simultaneous calls per handset
- > Indoor cabinet
- > Manual mounting kit
- > Easily mounted on walls
- > Size: 120(W) x 35(D) x 135(H)mm

## STANDARDS/APPROVALS

- > The DECT repeater is designed in accordance with the Digital Enhanced Cordless Telecommunications (DECT) standard
- > The DECT repeater is compliant with:
  - TBR6, TBR22 (Generic Access Profile, GAP)
  - ETS 300 700 - ETSI Wireless Relay Station Specification

## POWER SUPPLY

- > 230 VAC and 110 VAC versions available

## LED INDICATOR

- > LED INDICATOR



\*the repeater is perfect to use with the W52P