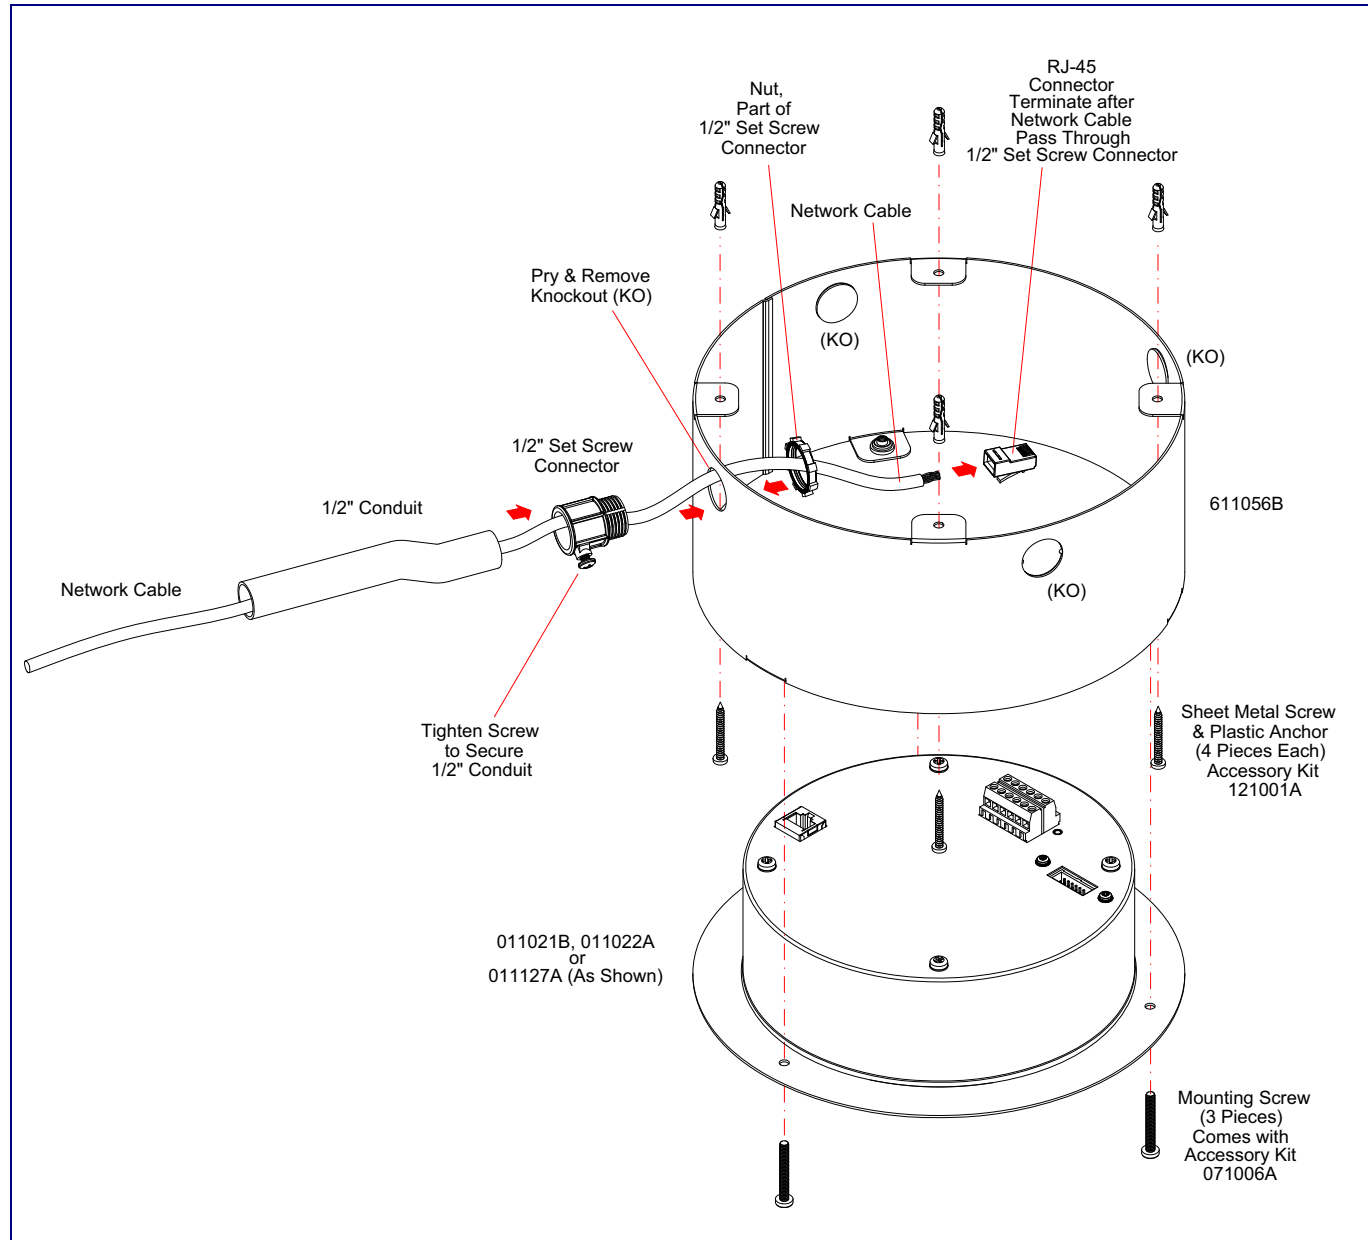


## Installing the Conduit Speaker Mount



## Contacting CyberData

### Corporate Headquarters

CyberData Corporation  
3 Justin Court  
Monterey, CA 93940, USA

Phone: 831-373-2601  
Fax: 831-373-4193  
www.CyberData.net

Sales: (831) 373-2601 ext. 334  
Support: 831-373-2601 ext. 333  
Web: <http://www.cyberdata.net/support/contactsupportvoip.html>  
RMA Dept: (831) 373-2601 ext. 136  
Email: [RMA@CyberData.net](mailto:RMA@CyberData.net)  
RMA Status: <http://www.cyberdata.net/support/rmastatus.html>






Warranty and RMA information is available at:  
Web: <http://www.cyberdata.net/support/warranty/index.html>

# Conduit Speaker Mount

## 011039

The Conduit Speaker Mount is an adapter that is built for a CyberData Ceiling speaker.

### Parts

| Accessory Kit                                                                                                               | Comes with the Ceiling Speaker Accessory Kit                                                                                                              | Not Provided                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| (4) #6 x 1.25-inch Sheet Metal Screw<br> | (3) #8 x 1.25-inch PanHead Phillips Machine Screw (Mounting Screw)<br> | (1) 0.5-inch EMT Set Screw Connector<br> |
| (4) Size 6 Plastic Anchor<br>          |                                                                                                                                                           | (1) 0.5-inch EMT Conduit<br>           |

### Procedure

To install the Conduit Speaker Mount:

1. Use the template to mark the hole locations on the ceiling.
2. Drill holes on the ceiling.
3. Insert the size #6 plastic anchor into the pre-drilled holes.
4. Line up the mounting adapter (part #611056B) and install the #6 sheet metal screws.
5. Tighten the sheet metal screws to secure the mounting adapter.
6. Line up the ceiling speaker assembly to the mounting adapter.
7. Install the size #8 Pan Head Phillips Machine Screws (mounting screw).
8. Tighten the mounting screw to secure the ceiling speaker to the mounting adapter.

