

# 1

## Before You Begin



### Package Contents

- Internet Telephony Gateway with 4 FXO Ports
- Power Adapter
- USB 1.1 Voice Mail Module
- RJ-45 Ethernet Cable
- 4 -RJ11 Telephone Cables
- Quick Installation

# IP Telephony System

**with 4 FXO Ports**

**Quick Installation**

**VoIP**  
Voice

Model No. **SPA400**



# 2

## Connecting the SPA400

A

Connect the included ethernet network cable from the ethernet port on the SPA400 to the ethernet port on the multi-port switch.

B



Plug one end of a supplied RJ11 telephone cable into one of the line ports on the SPA400 and the other end into the RJ11 wall outlet.

C

Plug in the included USB 1.1 voice mail module into the USB port.

D

Connect the included power adapter to the power port on the SPA400 and then plug the power adapter into an electrical outlet.

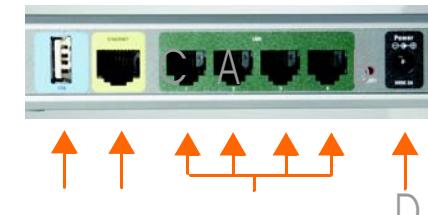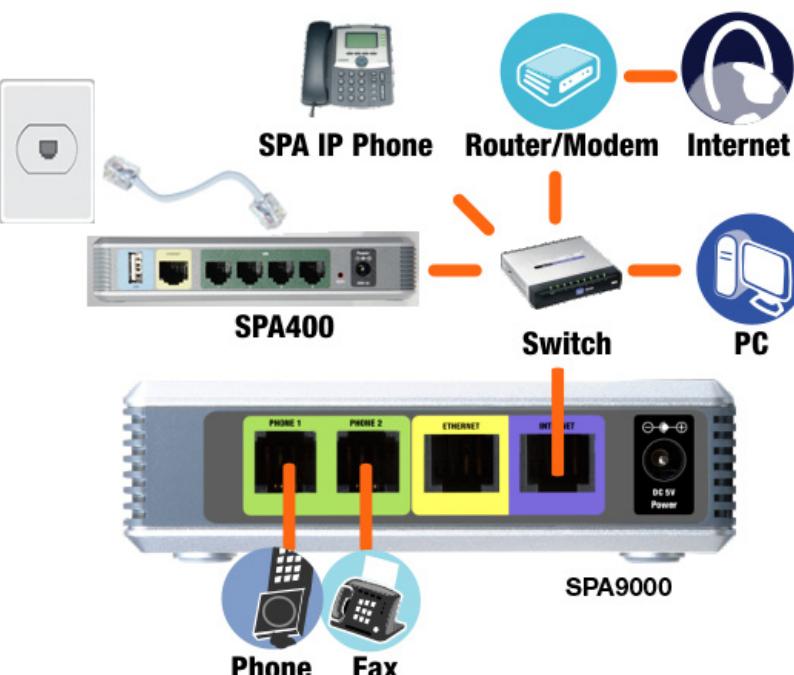

**LINKSYS®**

A Division of Cisco Systems, Inc.

For additional information or troubleshooting help go to the Linksys website. You can also call or email for further support.

### Website

<http://www.linksys.com>  
<http://www.linksys.com/support>

### E-mail Support

[support@linksys.com](mailto:support@linksys.com)

### 24-hour Technical Support

800-326-7114  
(toll-free from US or Canada)

### FTP Site

[ftp://ftp.linksys.com](http://ftp.linksys.com)

### Sales Information

800-546-5797 (800-LINKSYS)

Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2006 Cisco Systems, Inc. All rights reserved.